


FORMING DIMENSION (SPECIAL TYPE)


M TYPE

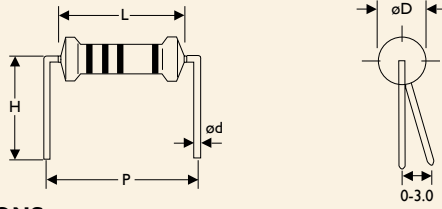

STYLE		DIMENSIONS					Unit: mm
Normal	Miniature	L	P	øD	ød	H	
TYPE-12	TYPE25S	3.4±0.3	6.0±1	1.9±0.2	0.45±0.05	10.0±1	
TYPE-25	TYPE50S	6.3±0.5	10.0±1	2.4±0.2	0.55±0.05	10.0±1	
TYPE-50	TYPE1WS	9.0±0.5	12.5±1	3.3±0.3	0.55±0.05	10.0±1	
TYPE100	TYPE2WS	11.5±1.0	15.0±1	4.5±0.5	0.8±0.05	12.5±1	
TYPE200	TYPE3WS	15.5±1.0	20.0±1	5.0±0.5	0.8±0.05	15.0±1	
TYPE300/TYPE400	TYPE5WS/TYPE5SS	17.5±1.0	25.0±1.0	6.5±0.5	0.8±0.05	15.0±1.0	
TYPE500/TYPE700	TYPE7WS	24.5±1.0	30.0±1.0	8.0±0.5	0.8±0.05	15.0±1.0	

Note: FMP/KNP/NKN/FKN/PNP/PNPV/FAE series: øD is different from above table, please refer to each specification of catalog.


MB TYPE

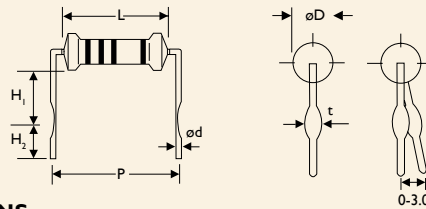

STYLE		DIMENSIONS							Unit: mm
Normal	Miniature	L	P	øD	ød	H ₁	H ₂	t	
TYPE-25	TYPE50S	6.3±0.5	10.0±1	2.4±0.2	0.55±0.05	6.0±1	5.0±1	1.2±0.2	
TYPE-50	-	9.0±0.5	12.5±1	3.3±0.3	0.55±0.05	6.0±1	5.0±1	1.2±0.2	
-	TYPE1WS	9.0±0.5	12.5±1	3.3±0.3	0.8±0.05	6.0±1	5.0±1	1.4±0.2	
TYPE100	TYPE2WS	11.5±1.0	15.0±1	4.5±0.5	0.8±0.05	6.0±1	5.0±1	1.4±0.2	
TYPE200	TYPE3WS	15.5±1.0	20.0±1	5.0±0.5	0.8±0.05	10.0±1	5.0±1	1.4±0.2	
TYPE300/TYPE400	TYPE5WS/TYPE5SS	17.5±1.0	25.0±1.0	6.5±0.5	0.8±0.05	10.0±1	5.0±1	1.4±0.2	
TYPE500/TYPE700	TYPE7WS	24.5±1.0	30.0±1	8.0±0.5	0.8±0.05	15.0±1	5.0±1	1.4±0.2	
RSF300/RSF500	RSF5WS	24.5±1.0	30.0±1	8.0±0.5	0.8±0.05	15.0±1	5.0±1	1.4±0.2	

Note: FMP/KNP/NKN/FKN/PNP/PNPV/FAE series: øD is different from above table, please refer to each specification of catalog.


MR TYPE

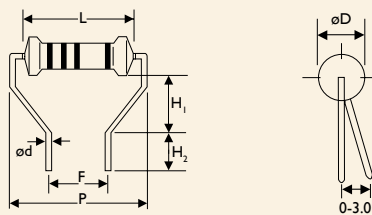


STYLE		DIMENSIONS							Unit: mm
Normal	Miniature	L	P	F	øD	ød	H ₁	H ₂	
TYPE-50	TYPE1WS	9.0±0.5	14.5±1	7.0±0.5	3.3±0.3	0.55±0.05	7.0±1	5.0±1	
TYPE100	TYPE2WS	11.5±1.0	17.5±1	7.0±0.5	4.5±0.5	0.8±0.05	8.0±1	5.0±1	
TYPE200	TYPE3WS	15.5±1.0	21.5±1	7.0±0.5	5.0±0.5	0.8±0.05	9.0±1	5.0±1	

Note: FMP/KNP/NKN/FKN/PNP/PNPV/FAE series: øD is different from above table, please refer to each specification of catalog.


F TYPE

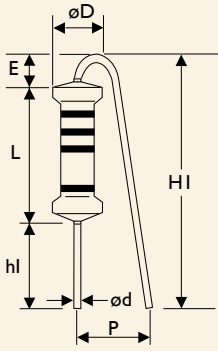


FK TYPE

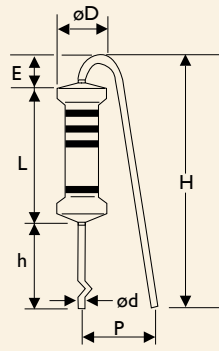

FFK TYPE

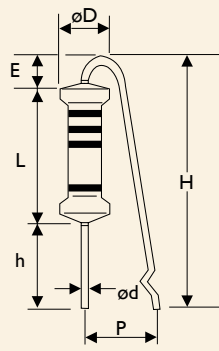

FKK TYPE

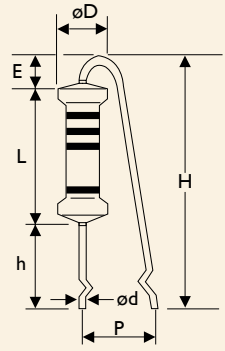

STYLE

DIMENSIONS

Unit: mm

Normal	Miniature	L	P	øD	ød	h	H Max.	hl	Hl Max.	E Max.
TYPE-50	TYPE1WS	9.5±0.5	6±1	3.3±0.3	0.55±0.5	8.0±1	22	5.0±1	18.5	3.5
TYPE100	TYPE2WS	11.5±1	6±1	4.5±0.5	0.8±0.05	8.0±1	24	5.0±1	20	3.5
TYPE200	TYPE3WS	15.5±1	6±1	5.0±0.5	0.8±0.05	8.0±1	28	5.0±1	25	3.5

Note: TYPE-25/50S is available.

FMP/KNP/NKN/FKN/PNP/PNP V/FAE series: øD is different from above table, please refer to each specification of catalog.

FT Type Forming for Taping

Rated Watts 1/4W, 1/2WS & 0.6W

Body Dimension : L = 6.3±0.5mm

øD = 2.4±0.2mm

Rated Watts : 1/2W & 1WS


Body Dimension : L = 9±0.5mm

øD = 3.3±0.3mm

Rated Watts : 1W & 2WS

Body Dimension : L = 11.5±1.0mm

øD = 4.5±0.5mm

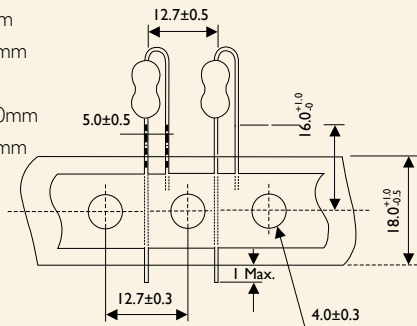


MT Type Forming for Taping

Rated Watts 1/6W, 1/4WS & 0.4W

Body Dimension : L = 3.4±0.3mm

øD = 1.9±0.2mm

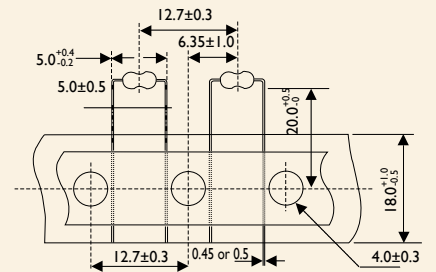

PN Type Forming for Taping

Rated Watts 1/4W, 1/2WS & 0.6W

Body Dimension : L = 6.3±0.5mm

øD = 2.4±0.2mm

Rated Watts : 1/2W & 1WS


Body Dimension : L = 9±0.5mm

øD = 3.3±0.3mm

Rated Watts : 1W & 2WS

Body Dimension : L = 11.5±1.0mm

øD = 4.5±0.5mm

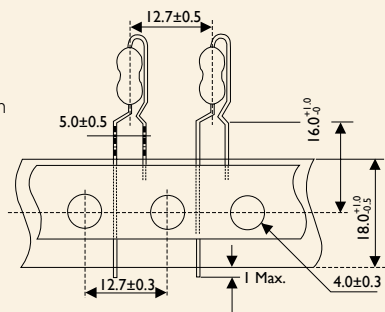

AV Type Forming for Taping

Rated Watts 1/4W, 1/2WS & 0.6W

Body Dimension : L = 6.3±0.5mm

øD = 2.4±0.2mm

Rated Watts : 1/2W & 1WS

Body Dimension : L = 9±0.5mm

øD = 3.3±0.3mm

Rated Watts : 1W & 2WS

Body Dimension : L = 11.5±1.0mm

øD = 4.5±0.5mm

