




# Cisco Open ceExtend

## Technology Design Guide

August 2014 Series









# Introduction

---

## Technology Use Case



Cisco Wireless LAN Controllers





# Deployment Details

---












Click

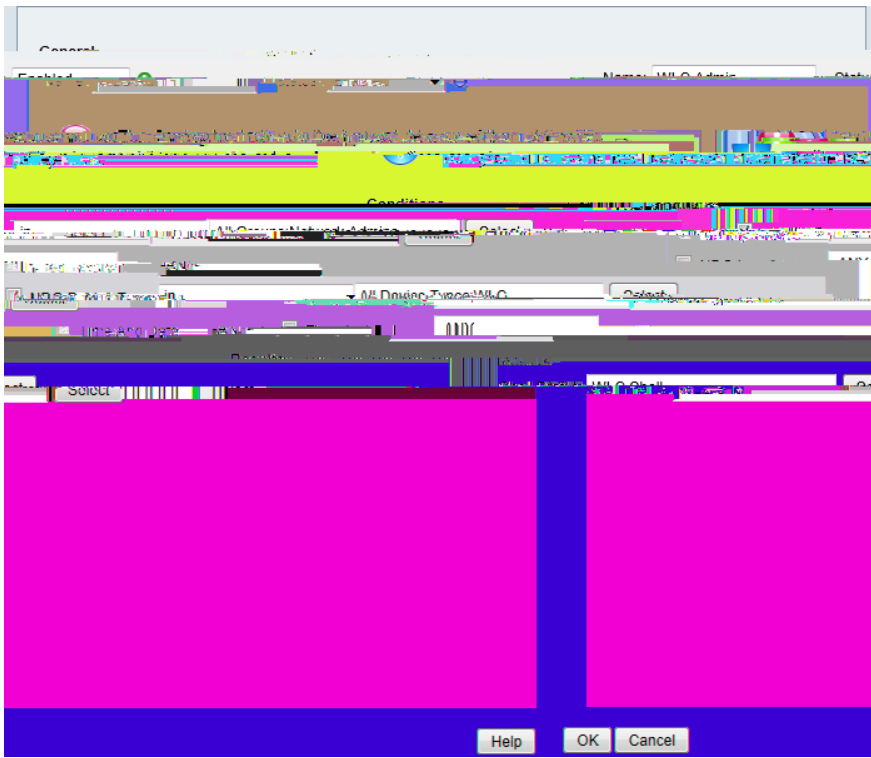

On the Allowed Protocols pane, ensure [ ] and [ ] are selected, and then click [ ] .

On the "Access Service created successfully. Would you like to modify the Service Selection policy to activate this service?" message, click [ ] .

On the Service Selection Policy pane, click [ ] .


Using the arrow buttons, move [ ] from the [ ] list to the [ ] list, and then click [ ] .

On the Service Selection Rules pane, select the default RADIUS rule.

Next, you create a new service profile. In the Service Profile Name field, enter `se0k/GS1a fn pr wn5.6(u cr)4.4(e)-1.8(l)-4.5(e)-6.8(s)--0.8(n c)0.6(lh)-5.6(e(e)-2( 2(f)-1(a)-)-7(`



Under Results, in the [redacted] list, choose [redacted], and then click [redacted].

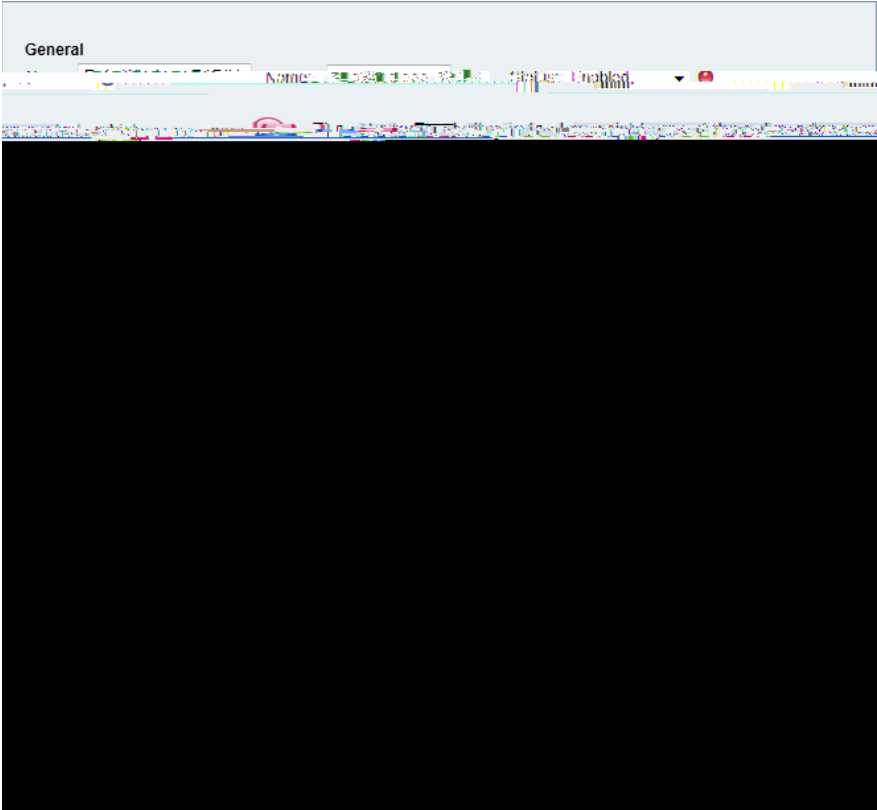















In the























Synchronize the WLC clock to your organization's NTP serv01 re :







Click

































On the General tab, in the









Click the [tab](#), and in the























## Configuring WLC Resiliency

1. Configure the resilient WLC
2. Configure APs for resiliency



















Please use the

I