

7]gWc`HY`YDfYgYbWV`A UbU[Ya Ybhi

CiscoC sresesss o

asssesesss o

usC s s o

7 jgWc
HA GL 9

< 50 endpoints

s	FYei JfYa Ybh	7JgWc'69*\$\$\$
8]g_ 'gdUW' d'fcj]XYX'cb' gYfj Yf	60 GB	60 GB

'5Xa]b]gfhUhj Y Hcc`g`2'7cbZ][i fU]cb`2'BYtk cf_'GYtt]b[g

CdYfUn[

For new installations, the installer creates tmsng using the ~~SQL~~ server defaults. tt

Use automatic setup,

Domain membership preferred: Each user logging into Cisco TMS needs a Windows User Login to authenticate to the web site. Users must have either a

I g]b['GE @GYfj YfJ Yfg]cbg'9Uf]Yf'hUb'&\$\$, 'F&'UbX'K]bXck g

A Ubi U`mFYgc`j]b['5bmFYa U]b]b['8i d`]W]H' 5ddc]b]a Yb]g`]b`9l W]Ub[YFYgci fW`7UYbXUfg

In some deployments, there may be a small number of duplicate Exchange appointments in the

I d[fUX]b['7]gVc HA G UbX FYgc j]b['8i d']WUy '7 cbZYfybWg

Customers who use Cisco TMSXN and are upgrading from 14.4 or

7 gWt HA G'5[Ybh@Y[UWnDfcj]g]cb]b[

If upgrading from 13.2.x or any

Prerequisites

8Yd`cna YbhVYghidfUWjWg

This chapter covers best practices for

⇒Yb]Zn]o[

certificates signed by a certificate authority.

7cb2[i f]b[-Gscf-a dfcj YX'GYW f]m

In IIS Manager:

1. Disable the Polycom phonebook component if not using Polycom systems:
 - a. Expand the tree view

Cisco TelePresence MXP (F7 and later)

Getting Started with Cisco TMS

This chapter covers the procedures to perform a new installation or upgrade of Cisco TMS.

Before You Start	22
Running the Installer	22

6. When the Welcome screen is displayed, click BYI h

If

4. You can now pre-configure default settings to allow Cisco TMS to immediately start working with a basic network configuration. The settings can be changed after installation.

If

Zones are a configuration concept used by Cisco TMS to



the list of currently installed certificates. Press the buttons below to select a certificate to use from the list.

Issued To	Issued By	Expiration Date	Name	Issue
-----------	-----------	-----------------	------	-------



1. Click **Create** to add an existing certificate in .pfx format, or click **Import...** for a self-signed certificate.
2. When

3. A window called Edit

GYh]b[i d'


8UUVUgY FYXi bXUbWn

Remains in a standby mode with its web pages and services locked down.
Refuses all incoming traffic from users and managed systems.

While a node is passive, traffic to the tmsng database is kept to a minimum,

connectivity setting and parameters based on information in IP protocol headers is disabled when Cisco TMS redundancy is enabled. For further information on how Cisco TMS communicates with managed systems, refer to the chapter *System management overview* in the [Cisco TMS Administrator Guide](#).

Organizations that make significant changes to their network after deploying a redundant Cisco TMS solution must manually verify that system connectivity between Q it true mu ssscCa ges to` menant chansO at ma

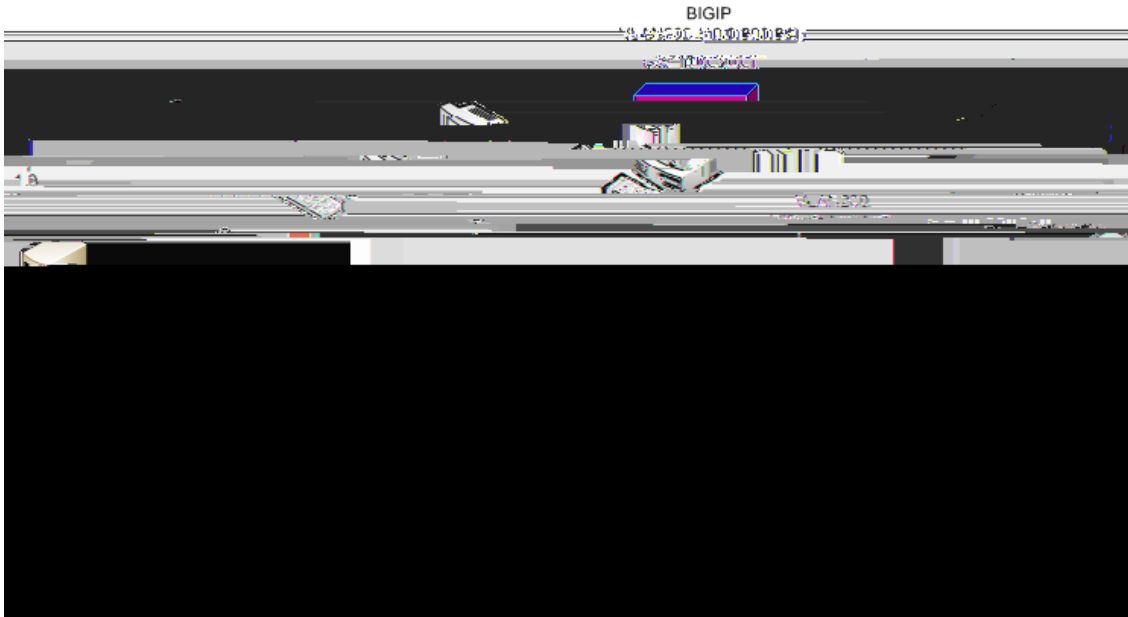

⌘gH`b['UbX '7 cbZ[i f]b[

⌘gH`b['7]gWt 'HA G'cb 'hā g\$%

1. Prior to installing Cisco TMS, set up an SQL Server instance on an external server.
2. Install

HYgh]b['A Ubi U': U]cj Yf

1. Go to the IP/hostname of tms01.
2. Go to:

The same options are selected in Cisco TMS Tools on both servers.
The TL

FYWcj Yfm]b'7 UgY'cZU: U]]b[

Tms02 is now ready to

1. Unplug tms01 from the

dd I d[fUXY'

'89@9H9'1 BI G98 'DF C 69G

A c j] b [' c f ' l b] b g h U `] b [' 7] g W C ' H A G

This

2. Using SQL Server

4. Copy

A c j] b [' 7] g W c ' H A G D 9

Cisco TMSPE is always installed on the Cisco TMS server and must be moved as soon as Cisco TMS has been moved.

As with Cisco TMS, the Cisco TMSPE databases may be local or remote.

@c W U

I b]bghU`]b[`7]gWc`HA G

This section tells you

5ddYbX] Yg

Appendix 1: Restricting IIS Modules to Minimal Required

54

Appendix 2: Configuring IIS Request Flood Protection

55

5ddYbX] % \$ Ygf]Wb[=G A cXi Yg'c'

StaticCompressionModule

StaticFileModule

WindowsAuthentication

WindowsAuthenticationModule

5. Select the *Select a server from*

3. In the Actions panel

@]a]]b['h.Y'HcU`Bi a VYf'cZ7cbbYW]cbg

7]gWc @Y[U` bZcfa Uh]cb

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE