



KONICA MINOLTA

**Universal Print Driver
System Administrator's Guide**

Platform Development Division 2
System Platform Development Center R&D Headquarters Business Technologies
KONICA MINOLTA, INC.

Version	Date
3.4.0	Apr/23/2018

Revision History

Version	Date	Modified Contents	Description	Editor
0.1	Mar/17/2010	Initial version		C. Ichikawa
0.2	Mar/19/2010	- Added Copyright, Trademark Credits, and Target Driver Version - Rolled the icon-list figure in section 5.3 into section 1.2 - Added figure numbers - Corrected text in sections 1.2, 5.5, and 5.6		C. Ichikawa
0.3	Mar/31/2010	Added Chapters 3 and 4		C. Ichikawa
0.4	Apr/1/2010	- Added content to Section 2.2 - Added Section 2.3 - Added Section 4.4 - Overall revision to Chapters 3 and 4		C. Ichikawa
0.41	Apr/1/2010	- Partial revision to 2.2 - Added Note to Section 3.1, Method 2: Manual Uninstallation - Changed/added steps 10 and 11 in 4.2 Dynamic Mode		Nobu.Kimura
0.42	Apr/1/2010	Slightly edited formatting		C. Ichikawa
0.43	Apr/19/2010	Replaced screenshots on Japanese OS by screenshots on English OS.		C. Ichikawa
0.5	Jun/15/2010	- Changed order of the chapters as follows: 1. Introduction (old 2.1) 2. Software Description 2.1 System Requirements (old 2.2) 2.2 UPD Components (old 2.3) 2.3 Supported Models (old 1.1) - Corrected misspellings - Added Table 2-3-2, Table 2-4-2 - Added text in section 3.2 - Replaced figure and added text in section 2.2		C. Ichikawa
1.0	Jul/2/2010	- Corrected text in "Target Driver Version" - Corrected text and tables in section 2.3 - Corrected Table 2-4-2, Table 4-4-1, Table 4-4-2 - Corrected text in section 5.5 - Changed fonts settings - Corrected reference numbers	Released edition	C. Ichikawa
1.1	Jul/14/2010	Added Note about end of support for Windows 2000 to section 2.1		C. Ichikawa
1.2	Aug/21/2010	Corrected text and figures in section 3.4 in accordance with content in release of Update Package version 1.1.0.0.		C. Ichikawa

1.3	Feb/7/2011	• Changed Copyright year • Added Citrix information to Trademark Credits • Corrected target version to MR2 release version • 2.1 System requirements - Removed Windows 2000 from list - Added Citrix information - Removed description of unsupported environments from notes • 2.3 Supported Models - Changed model names - Added target devices - Added notes for some models - Added restrictions for added or changed models • 2.4 Third-Party Product Compatibility - Changed PCL XL version - Changed model names • 3.1 Install and Uninstall - Added note about installation with MSCS and Citrix - Added folders for manual deletion - Removed Windows 2000 from list • 4.1 Dynamic Mode and Traditional Mode - Removed descriptions of initial display window for network search and history view - Changed description of connection confirmation dialog box and window layout • 4.3 Using Traditional Mode - Changed input restriction of Printer Icon Name to 65 characters - Removed restriction relating to MMC • 5. Frequently Asked Questions - Corrected description of Cluster/Citrix support - Added target models where My Tab feature is available - Removed description of user profiles - Added models where My Tab feature is available		K.Tani
1.3a	Apr/1/2011	• Changed name of the UPD from “Universal Printer Driver” to “Universal Print Driver”. That was requested from BT Product Planning Div.	Released edition	K.Tani

2.0	Feb/1/2012	• Changed Copyright year • Corrected target version to Ver.2 release version • 1. Introduction - Added the “Add Printers from Printer List” function • 2.1. System requirements - Added the Citrix version • 2.2 UPD Components - Corrected the Device Selector screen • 2.3 Supported Models - Updated the supported models to Ver.2 - Corrected the differences from Production Version • 3. Installing, Uninstalling, and Updating - Updated the description to Ver.2 • 4.3 Using Traditional Mode - Changed the button name - Added descriptions for new functions in the “Add to Printer Folder” dialog box - Deleted the description to open the Child Driver screen • 5. Frequently Asked Questions - Corrected the Citrix support version - Added support information for TS Easy Print and RD Easy Print - Added support information for Printer Driver Isolation	Released edition	K.Tani
2.1	Jul/10/2012	• Corrected target version to Ver.2MR1 release version • 2.3 Supported Models - Updated the supported models to Ver.2MR1 - Corrected the differences from Production Version • 3.1 Summary - Added the note of Update. • 5. Frequently Asked Questions - Added models where My Tab feature is available		K.Tani
2.2	Mar/29/2013	• Corrected target version to Ver.2MR2 release version • 2.1 System requirements - Added the supported OS version	Released edition	T.Nishimaki

2.3	Jul/16/2013	• Corrected target version to Ver.2MR3 release version • 2.3 Supported Models - Updated the supported models to Ver.2MR3 - Corrected the differences from Production Version	Released edition	J. Murashita
2.4	May/1/2014	• Corrected target version to Ver.2MR4 release version • 2.1 System requirements - Added the supported OS version • 2.3 Supported Models - Updated the supported models to Ver.2MR4 - Corrected the differences from Production Version	Released edition	J. Murashita
2.5	June/16/2014	• Corrected target version to Ver.2MR5 release version • 2.3 Supported Models - Updated the supported models to Ver.2MR5 - Corrected the differences from Production Version • 3.1. Summary - Added the Note of when the old version is installed • 3.4. Update - Changed the description about update • 4.1. Operation Mode - Added the description about Auto Select Mode • 4.4. Using Auto Select Mode - Newly added • 4.5. Changing the Display Language - Newly added • 4.6. UPD Versions - Changed Section Number	Released edition	J. Murashita

2.51	July/25/2014	• Corrected target version to Ver.2MR5puls release version • 3.1 Summary Corrected the Note about update • 3.2 Install Renewed the figures of installation • 3.4 Update Corrected the description about update. • 4.1 Operation Mode Added the description about Dynamic Mode • 4.2 Using Dynamic Mode -Renewed Figure 4-2-12 Option Dialog Box. -Renewed Table4-2-7 Option Dialog Box Settings. • 4.4 Using Traditional Mode Corrected the description about Auto Select Mode. • 4.5 Changing the display Language -Added the description about changing the display language in installation. -Added the description about Preferred and Fallback languages. • 4.6 UPD Versions Add the description about “CFG” in Table4-6-4 Version Information Dialog Box Items.	Released edition	S.Ri
2.52	Jan/14/2015	• 4.4 Using Traditional Mode Corrected the description about the File path of log file.	Released edition	J. Murashita
2.53	Jan/20/2015	Change the character “¥” to “\”.	Released edition	J. Murashita

2.6	Jan/23/2015	• Corrected target version to Ver.2MR6 release version. • Add information of PCL5. • 2.3 Supported Models - Updated the supported models to Ver.2MR6 - Corrected the differences from Production Version • 2.4 Third-Party Product Compatibility - Add Function list of PCL5 in Table 2-4-2 baseline PCL / PS / PCL5 Driver functions • 5.5 Can I Use MyTab Function? - Add Drivers that support MyTab • 6. Appendix - Newly added	Released edition	S.Ri
2.7	Mar/23/2015	• Corrected target version to Ver.2MR7 release version. • 2.3 Supported Models - Updated the supported models to Ver.2MR7 - Corrected the differences from Production Version • 4.4 Using Auto Select Mode - Changed file path • 4.7 UPD DriverAPI - Newly added • 4.8 PCL5 - New added • 5.5 Can I use MyTab Function? - • 6.1 Function list of PCL5 Child Drivers - Updated the table of MFP and Printer.	Released edition	S.Ri

2.8	Jul/21/2015	• Corrected target version to Ver.2MR8 release version. • 2.1 System requirements - Add Windows 10 to support OS - Add support Citrix version • 4.2 Using Dynamic Mode - Update Figures - Corrected description of [Function] - Add description of [SNMP setting] • 4.4 Using Auto Select Mode - Update Figures - Corrected description about .ini file • 4.5 Changing the Display Language - Update Figures • 4.6 UPD Versions - Update Figures • 6.1 Function list of PCL5 Child Driver - Updated the table of MFP and Printer.	Released edition	S.Ri
2.9	Oct/9/2015	• Corrected target version to Ver.2MR9 release version. • 2.3 Supported Models - Updated the supported models to Ver.2MR9 - Corrected the differences from Production Version • 6.1 Function list of PCL5 Child Drivers - Updated the table of MFP.	Released edition	S.Ri
3.0 draft	Feb/29/2016	• 3. Installing, Uninstalling, and Updating the UPD - Add description about how to use Admin Tools. • 4.1 Model changing method - Add description about changing model on the UI because of One Core Driver. • 4.9 Administrator Customization - Add description about how to use Admin Customization.		S.Ri
3.0	Apr/8/2016	• It was totally revised to conform to the UPD Ver.3.0	Released edition	S.Ri J.Murashita
3.0a	Apr/19/2016	• 2.1 System requirements - Delete Windows 8 from support OS.	Released edition	J.Murashita

3.1	May/11/2016	• Corrected target version to Ver.3.1 release version • 2.3 Supported Models - Updated the supported models to Ver.3.1 • 6.1 Function list of PCL5 - Updated the table of MFP.	Released edition	H.Ooyama
3.2	Oct/03/2016	• Corrected target version to Ver.3.2 release version • 2.3 Supported Models - Updated the supported models to Ver.3.2 • 6.1 Function list of PCL5 - Updated the table of MFP.	Released edition	Y.nobuta
3.2.1.	Dec/20/2016	• Trademark Credits -Delete unsupported Windows versions. • Corrected target version to Ver.3.2.1 release version	Released edition	K.Yu
3.2.2	Jan/31/2017	• Corrected target version to Ver.3.2.2 release version	Released edition	Y.Nobuta
3.3.0	Sep/29/2017	• Corrected target version to Ver.3.3.0 release version • 2.1. System requirements Corrected to Ver.3.3.0 release version • 2.3 Supported Models Corrected to Ver.3.3.0 release version	Released edition	Y.Nobuta
3.4.0	Apr/23/2018	• Corrected target version to Ver.3.4.0 release version • 2.1. System requirements Corrected to Ver.3.4.0 release version • 2.3 Supported Models Corrected to Ver.3.4.0 release version - Bizhub 40P Not Support - Pull Printing Support	Released edition	Y.Nobuta

Copyright

All Rights Reserved, Copyright(c) 2017 KONICA MINOLTA, INC.

Trademark Credits

PostScript is a trademark of Adobe Systems Incorporated.

PCL is a trademark of Hewlett-Packard Company.

Microsoft, Windows, Windows Server 2008, Windows 7, Windows Server 2012, Windows 8.1, Windows Server 2016 and Windows 10 are U.S. registered trademarks of Microsoft Corporation.

Citrix®, Citrix Presentation Server™, and XenApp™ are trademarks of Citrix Systems, Inc.

Target Driver Version

The information in this document applies to the following versions of the KONICA MINOLTA Universal Print Drivers.

- KONICA MINOLTA Universal PCL Version 3.4.0.0
- KONICA MINOLTA Universal PCL5 Version 3.4.0.0
- KONICA MINOLTA Universal PS Version 3.4.0.0

Index

1. Introduction.....	13
2. Software Description	15
2.1 System requirements.....	15
2.2 UPD Components.....	15
2.3 Supported Models	17
2.4 Third-Party Product Compatibility.....	24
3. Installing, Uninstalling, and Updating the UPD	28
3.1 Summary	28
3.2 Install	28
3.3 Uninstall.....	35
3.4 Update	40
3.5 Supporting New Models	47
4. Use Universal Print Drivers	47
4.1 Model changing method	47
Procedure of model changing.....	47
4.2 Using Device Selector	49
4.3 Changing the Display Language	59
4.4 UPD DriverAPI.....	62
4.5 PCL5.....	62
4.6 Administrator Customization.....	64
Print setting of customization target	65
Setting mothod.....	66
Export and import the settings of Administrator Customization	68
Method of export	68
Method of import	69
4.7 Using InstCfg.ini	70
5. Frequently Asked Questions.....	81
5.1 Is the Microsoft Cluster Service (MSCS) supported?	81
5.2 Is the Citrix Environment Supported?	81
5.3 Are TS Easy Print and RD Easy Print supported?	81
5.4 How to Find the Supported or Non Supported Products by UPD?	81
5.5 Can I Use MyTab Function?	82
5.6 Can All Users Utilize UPD without Restrictions?	82
5.7 Is the Windows 7 Device Stage supported?	82
5.8 Is Printer Driver Isolation supported?	82
6. Appendix	83
6.1 Function list of PCL5	83
MFP(IT4 later)	83

MFP(IT4 earlier).....	91
Printer	98

1. Introduction

Konica Minolta's Universal Print Driver is a powerful new print solution that increases print productivity and reduces administrative costs by offering a single printer driver for all devices.

User Benefits

- **Easier printer management**

You can access multiple printers in your office using a single KONICA MINOLTA Universal Print Driver. Eliminate the work and cost of installing and managing separate printer drivers for each division.

- **Fewer printer icons**

With a KONICA MINOLTA Universal Print Driver, you do not need to create a large number of printer icons. This eliminates several issues, such as cluttering your computer with many seldom-used icons, and having to guess which printer to select every time you print something.

- **Choosing the best printer**

- **Choosing by printing method**

You can select a printer based on information about the printing speed and functionality of each printer. For example, if you want to print to A3-sized paper in color at a speed of at least 20 ppm, you can easily find the printer that matches these parameters, and print to that printer.

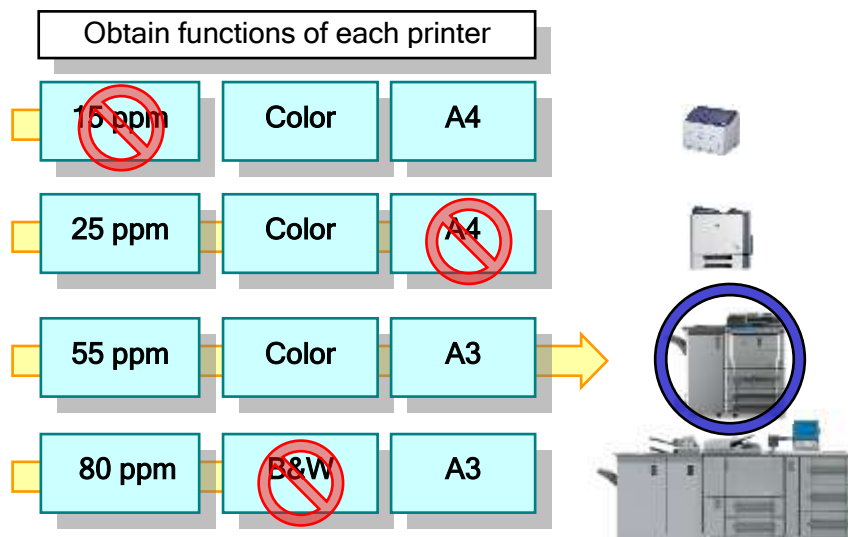


Figure 1-1-1 Example of Selecting Printer by Printing Method

- **Choosing by printer status**

You can make sure that a printer does not have an error or warning, and check the backlog of jobs on the printer. Check the status of each printer, and choose the one that can print your job the fastest.

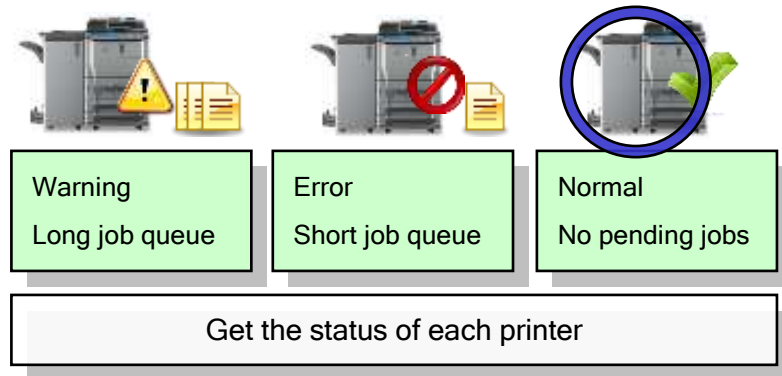


Figure 1-1-2 Example of Selecting Printer by Printer Status

- **Printing immediately while away from the office**

Once you have installed KONICA MINOLTA Universal Print Driver, you can print right away while you are away from the office without installing a new printer driver or setting the printer's IP address. Universal Print Driver will detect the available printers at your current office; all you need to do is select the printer that suits your needs.

Features

- Print to KONICA MINOLTA devices as well as third-party devices (see **2.4 Third-Party Product Compatibility** for details).
- Use many KONICA MINOLTA devices with nearly the same windows and functionality as a normal driver (see **2.3 Supported Models** for details).
- Determine the device of output destination when add a printer icon, and display Printing Preferences that matches the model.
- From the device list on the Universal Print Driver window, you can check the name, status, location, printing speed, IP address, Mac address, color-printing capabilities (whether it is color or B&W), and PDL support of each device, and select devices as well.
- Three methods of device access are available: "Network Search", "History", and "Manual Connection". Access your devices using the method suited to your needs.

2. Software Description

2.1 System requirements

KONICA MINOLTA Universal Print Driver supports the following OS versions and environments.

➤ Windows

- Windows Server 2008 Standard (x86/x64)
- Windows Server 2008 Enterprise (x86/x64)
- Windows Server 2008 R2 Standard
- Windows Server 2008 R2 Enterprise
- Windows 7 Home Basic
- Windows 7 Home Premium (x86/x64)
- Windows 7 Professional (x86/x64)
- Windows 7 Enterprise (x86/x64)
- Windows 7 Ultimate (x86/x64)
- Windows Server 2012 Standard
- Windows Server 2012 Datacenter
- Windows Server 2012 Essentials
- Windows 8.1
- Windows 8.1 Pro
- Windows Server 2012 R2 Standard
- Windows Server 2012 R2 Datacenter
- Windows Server 2012 R2 Essentials
- Windows 10
- Windows Server 2016

➤ Citrix

- Citrix XenApp 6.5
- Citrix XenApp 7.15
- Citrix XenDesktop 7.14
- Citrix XenDesktop 7.15

2.2 UPD Components

KONICA MINOLTA Universal Print Driver consists of three main types of component: UPD Core, Model Definition Files and the Device Selector. UPD Core is the core module of UPD,

and provides functionality used internally throughout UPD. Model Definition Files are the modules that define the behavior of each model. Definition files are hierarchical structure and common definition are gathered between the models in order to restrain the increase of driver file size. The Device Selector is a module for selecting the output device when printing. After you have selected the output device, you can connect the definition files that are appropriate for that device.

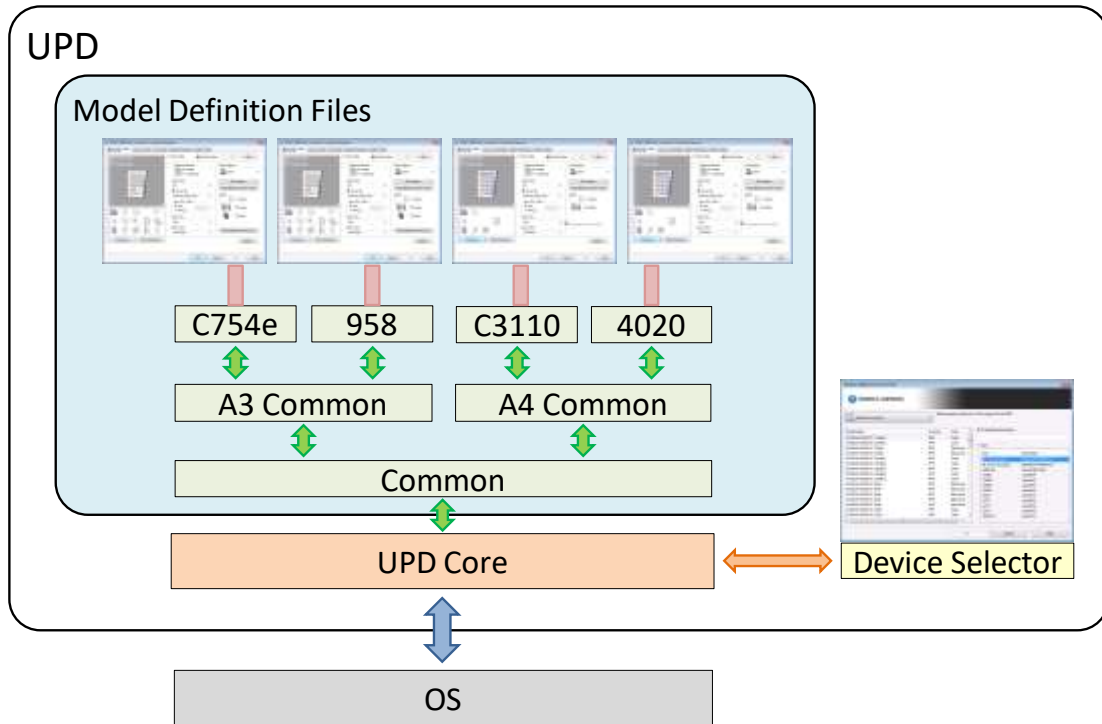


Figure 2-2-1 UPD Components

2.3 Supported Models

The table below lists the KONICA MINOLTA devices supported by each of the Universal Print Drivers.

KONICA MINOLTA A3/A4 individual Driver (*1)	KONICA MINOLTA A3 common Driver(*2)	KONICA MINOLTA A4 common Driver(*3)	Semi-individual Driver(*4)	Baseline Driver (*5)	ubiquitous Driver (*7)
bizhub 362/282/222	bizhub C353P	magicolor 4650EN/DN	bizhub 195/215/235 (*6)	163/211 (*6)	Pull Printing(*8)
bizhub 501/421/361	magicolor 8650DN	magicolor 5550/5570	bizhub 20/20P	Other products	
bizhub 751/601	bizhub C200	magicolor 5650/5670	bizhub 25e		
bizhub 423/363/283/223	bizhub C210	magicolor 5450			
bizhub 652/602/552/502	bizhub C650/C550/C451	magicolor 4695MF			
bizhub C360/C280/C220	bizhub 500/420/360	pagepro 4650/5650			
bizhub C35/C35P/C25	bizhub 750/600	bizhub C20P			
magicolor 4750	bizhub	bizhub C30P/C31P			
bizhub C652/C552/C452	C450/C450P/C351				
bizhub	bizhub	bizhub C20			
C652DS/C552DS	C352/C352P/C300				
bizhub 42/36	bizhub C250/C250P				
bizhub C754(e)/C654(e)	bizhub C252/C252P				
bizhub					
C554(e)/C454(e)/C364(e)	bizhub C353/C253/C203				
C284(e)/C224(e)					

bizhub 754(e)/654(e) bizhub 4700P/4000P/3300P/3301P bizhub 554e/454e/364e/284e/224e bizhub C3850/C3350/C3850FS bizhub 4750/4050 bizhub 4020/3320 bizhub C3100P bizhub C281/C221/C221s bizhub 367/287/227 bizhub C368/C308/C258 bizhub C287/C227 bizhub 958/808/758 bizhub C658/C558/458 bizhub C353P bizhub C650/C550/C451 bizhub C353/C253/C203 bizhub 350/250/200	bizhub 350/250/200
---	--------------------

bizhub 368/308
bizhub 558/458
bizhub C266/C226
bizhub
C3851/C3351/C3851FS
bizhub 658e/558e/458e/
368e/308e
bizhub C759/C659
bizhub 4752/4052
bizhub 4402P/3602P
bizhub 4422/3622
bizhub Workplace Hub

- (*1) This indicates a printer driver supporting an individual model. The devices listed in this column can print using nearly the same functionality as a normal driver. See [Table 2-3-2 Differences between KONICA MINOLTA A3/A4 individual Driver and Production Version Drivers](#) for details about the differences between normal drivers and KONICA MINOLTA A3/A4 individual Driver.
- (*2) This is a common printer driver for KONICA MINOLTA devices that support A3 paper. It mainly supports the bizhub series.
- (*3) This is a common printer driver for KONICA MINOLTA devices that do not support A3 paper. It mainly supports the magicolor and pagepro series.
- (*4) This indicates a printer driver supporting a semi-individual model. Although some functions are restricted, printing from a Universal Print Driver is supported. See [Table 2-3-3 Differences between Semi-individual Drivers and Production Version Drivers](#) for details about the differences between Semi-individual Drivers and Production Version Drivers.
- (*5) These are common printer drivers included with third-party products. Only the main functionality is available. (See section 2.4).

(*6) PCL and PCL5 driver only

(*7) PCL and PS driver only

(*8) It is a common printer driver for ubiquitous printing environment.

Table 2-3-1 KONICA MINOLTA products supported by Universal Print Driver

Model	PDL	Target	Differences from Production Version Drivers
bizhub 501/421/361	PCL/PS	Printing Preferences	Functionality below are not supported. •Combination(No Reduction) •Print Type - Booklet(No Reduction) •Starting Number of Page Number •Header Position / Footer Position •Draft Print •Smoothing
bizhub 751/601	PCL/PS	Printing Preferences	Functionality below are not supported. •Combination(No Reduction) •Print Type - Booklet(No Reduction) •Starting Number of Page Number •Header Position / Footer Position •Draft Print •Smoothing
bizhub 362/282/222	PCL/PS	Printing Preferences	•Smoothing is not supported.
bizhub 42/36	PCL/PS	Printing Preferences	Functionality below are not supported. •Separator Page •Email Notification
bizhub C35/C35P/C25, magicolor 4750	PCL/PS	Printing Preferences	Functionality below are not supported. •Separator Page •Email Notification

bizhub C3850/C3350/C385 0FS	PCL/PS	Printing Preferences	Functionality below are not supported. • Separator Page • Email Notification
bizhub 4750/4050	PCL/PS	Printing Preferences	Functionality below are not supported. • Separator Page • Email Notification
bizhub C3100P/C3110	PCL/PS	Printing Preferences	Functionality below are not supported. • Separator Page • Email Notification
bizhub 4700P/4000P/3300 P/3301P	PCL/PS	Printing Preferences	Functionality below are not supported. • Separator Page • Email Notification
bizhub 4020/3320	PCL/PS	Printing Preferences	Functionality below are not supported. • Separator Page • Email Notification

Note: Items not supported by the KONICA MINOLTA A3/A4 individual Driver may be described in the help.

Note: There is no describe of PCL5 because KONICA MINOLTA Production Version Drivers have no PCL5 driver. For features that available in Universal Print Driver PCL5 driver, please refer to “6. Appendix”.

(*1) For some KONICA MINOLTA A3/A4 individual Drivers and Production Version Drivers, the default value is [2 sided].

Table 2-3-2 Differences between KONICA MINOLTA A3/A4 individual Driver and Production Version Drivers

Model	PDL	Target	Differences from Production Version Drivers
Common to All Models	PCL/PS	General	• The screen setup differs. • There is no Help.

bizhub 20/20P	PCL	Printing Preferences	The following items are not supported. •[Basic] tab-[Paper Size]-[A5 Long Edge],[A6],[B5],[B6],[Monarch],[3 x 5],[A4 Long],[Folio],[DL Long Edge] •[Basic] tab-[Media Type] •[Basic] tab-[Resolution] (600 dpi fixed) •[Basic] tab-[Print Settings] •[Basic] tab-[Multiple Page]-[25 in 1],[1 in 2x2 Pages],[1 in 3x3 Pages],[1 in 4x4 Pages],[1 in 5x5 Pages] •[Basic] tab-[Page Order] •[Basic] tab-[Border Line] •[Basic] tab-[Duplex]-[Booklet] •[Basic] tab-[First Page] •[Basic] tab-[Other Pages]-[MP Tray] •Other than [Advanced] tab-[Scaling]
	PS	Printing Preferences	The following items are not supported. [Paper/Output]-[Paper Size]-[A5 Long Edge],[A6],[B5],[B6],[Monarch],[3 x 5],[A4 Long],[Folio],[DL Long Edge] [Graphic]-[True Type Font] [Document Options]-[Advanced Printer Features] [Document Options]-[PostScript Options]-[TrueType Font Download Option] [Document Options]-[PostScript Options]-[PostScript Language Level] (Level 3 fixed) [Document Options]-[PostScript Options]-[Negative Output] [Document Options]-[Printer Features]-[Print Quality] (600 dpi fixed) [Document Options]-[Printer Features]-[Media Type] [Document Options]-[Printer Features]-[Secure Print] [Document Options]-[Printer Features]-[Password] [Document Options]-[Printer Features]-[Job Name] [Document Options]-[Printer Features]-[Toner Save] [Document Options]-[Printer Features]-[Half Tone Screen Lock] [Document Options]-[Printer Features]-[High Quality Image Printing] [Document Options]-[Printer Features]-[Improve Print Output] [Document Options]-[Printer Features]-[Density Adjust]

bizhub 195/215/235	PCL	Printing Preferences	The following items are not supported. [Setup] tab-[Paper Size]-[FLS 8 1/8 x 13 1/4],[FLS 8 x 13],[FLS 8 1/2 x 13 1/2],[8K] [Setup] tab-[Collate] [Setup] tab-[Paper Type]-[Recycle 2-side] [Per Page Settings] tab functions [Quality] tab-[Resolution] (600 dpi fixed) [Adjustment] dialog functions The following items are supported. [Job] tab-[User Settings]-[User Name],[Job Name] [Job] tab-[Combination Details]-[border]-[frame],[Line] [Edit Watermark] dialog-[Sharing] [Edit Watermark] dialog-[Frame] [Edit Watermark] dialog-[Repeat] [Job] tab-[Font Settings] dialog functions
	PCL	Properties	The following items are supported. [Settings] tab-[EMF Spool] [Settings] tab-[Display Constraint Message] [Settings] tab-[Display paper set in Print Server Properties]

Note: There is no describe of PCL5 because KONICA MINOLTA Production Version Drivers have no PCL5 driver. For features that available in Universal Print Driver PCL5 driver, please refer to "6. Appendix".

Table 2-3-3 Differences between Semi-individual Drivers and Production Version Drivers

2.4 Third-Party Product Compatibility

This section describes the third-party printers and multifunctional printers supported by KONICA MINOLTA Universal Print Drivers.

Information on the "Network Search" view

This page shows all the devices found on the network that are recognized as printers. Printers determined to be third-party devices as shown with the corresponding icon in the "Others" field. Information about color/black & white and PDL support is also obtained, and displayed on the Device Selector window. The Standby Job number, however, is not obtained.

Meanings of Icons		PDL Support - Yes -	PDL Support - No -
KONICA MINOLTA models	Color		
	B&W		
Others	Color		
	B&W		
	Unknown		

Table 2-4-1 Printer Type Icons

Printing to Third-party Devices

If a third-party device is selected, the "baseline PCL/PS/PCL5" driver is loaded, enabling print data to be sent. Konica Minolta cannot, however, guarantee the print results.

See **Table 2-4-2 baseline PCL / PS / PCL5 Driver functions** for the functionality provided by these drivers.

	baseline PCL	baseline PS	baseline PCL5	Remarks
	PCL XL Protocol 2.0	PS Level 3	PCL5c	
Job Tab				
Favorite Setting	Default Setting	Default Setting	Default Setting	
	User settings	User settings	User settings	
Original Orientation	Portrait	Portrait	Portrait	
	Landscape	Landscape	Landscape	
Original Size	Letter	Letter	Letter	(8.5x11 in)
	Legal	Legal	Legal	(8.5x14 in)
	Executive	Executive	Executive	(7.25x10.5 in)

	A3	A3	A3	(297x420 mm)/(11.7x16.5 in)
	A4	A4	A4	(210x297 mm)/(8.3x11.7 in)
	A5	A5	A5	(148x210 mm)/(5.8x8.3 in)
	A6	A6	A6	
	B4 (JIS)	B4 (JIS)	B4 (JIS)	(257x364 mm)/(10.1x14.3 in)
	B5 (JIS)	B5 (JIS)	B5 (JIS)	(182x257 mm)/(7.2x10.1 in)
	B6	B6	B6	
	11x17	11x17	11x17	(279.4x431.8 mm)/(11x17 in)
	Envelope Com10	Envelope Com10	Envelope Com10	(104.8x241.3 mm)/(4.1x9.5 in)
	Envelope DL	Envelope DL	Envelope DL	(110x220 mm)/(4.3x8.7 in)
	Envelope C5	Envelope C5	Envelope C5	(162x229 mm)/(6.4x9 in)
	Postcard	Postcard	Postcard	(100x148 mm)/(3.9x5.8 in)
	16K	16K	16K	(195x270 mm)/(7.7x10.6 in)
	Custom Size	Custom Size	Custom Size	
	[Custom Size Settings] Width: 90 - 311mm (3.55 - 12.25inch) Length: 140 - 1200mm (5.50 - 47.24inch) [Custom Size Settings]	[Custom Size Settings] Width: 90 - 311mm (3.55 - 12.25inch) Length: 140 - 1200mm (5.50 - 47.24inch)	[Custom Size Settings] Width: 90 ~ 311mm (3.55 ~ 12.25inch) Length: 140 ~ 1200mm (5.50 ~ 47.24inch)	
Paper Size	Same as Original Size	Same as Original Size	Same as Original Size	
	Letter	Letter	Letter	(8.5x11 in)
	Legal	Legal	Legal	(8.5x14 in)
	Executive	Executive	Executive	(7.25x10.5 in)
	A3	A3	A3	
	A4	A4	A4	(210x297 mm)/(8.3x11.7 in)
	A5	A5	A5	(148x210 mm)/(5.8x8.3 in)
	A6	A6	A6	
	B4 (JIS)	B4 (JIS)	B4 (JIS)	
	B5 (JIS)	B5 (JIS)	B5 (JIS)	(182x257 mm)/(7.2x10.1 in)
	B6	B6	B6	
	11x17	11x17	11x17	

	Envelope Com10	Envelope Com10	Envelope Com10	(104.8x241.3 mm)/(4.1x9.5 in)	
	Envelope DL	Envelope DL	Envelope DL	(110x220 mm)/(4.3x8.7 in)	
	Envelope C5	Envelope C5	Envelope C5	(162x229 mm)/(6.4x9 in)	
	Postcard	Postcard	Postcard	(100x148 mm)/(3.9x5.8 in)	
	16K	16K	16K	(195x270 mm)/(7.7x10.6 in)	
	Custom Size	Custom Size	Custom Size		
Zoom	Auto	Auto	Auto		
	Manual (25 - 400%)	Manual (25 - 400%)	Manual (25-400%)		
Paper Tray	Auto	Auto	Auto		
	Manual Feed	Manual Feed	Manual Feed		
Copies	1-9999	1-9999	1-9999		
Combination	Off	Off	Off		
	On	On	On		
	2 in 1	2 in 1	2 in 1		
	4 in 1	4 in 1	4 in 1		
	6 in 1	6 in 1	6 in 1		
	9 in 1	9 in 1	9 in 1		
	16 in 1	16 in 1	16 in 1		
Combination Details	Left-to-Right / Top-to-Bottom	Left-to-Right / Top-to-Bottom	Left-to-Right / Top-to-Bottom		
	Right-to-Left / Bottom-to-Top	Right-to-Left / Bottom-to-Top	Right-to-Left / Bottom-to-Top		
	Sideways from Upper-Left	Sideways from Upper-Left	Sideways from Upper-Left		
	Downward from Upper-Left	Downward from Upper-Left	Downward from Upper-Left		
	Sideways from Upper-Right	Sideways from Upper-Right	Sideways from Upper-Right		
	Downward from Upper-Right	Downward from Upper-Right	Downward from Upper-Right		
	Border	Off	Off	Off	
		On	On	On	
		Frame	Frame	Frame	
		Line	Line	Line	
	Rotate 180	Off	Off	Off	
		On	On	On	
	Skip Blank Pages	Off	NA	N/A	
On		NA	N/A		
Print Type	1-Sided	1-Sided	1-Sided		
	2-Sided	2-Sided	2-Sided		
	Booklet	Booklet	Booklet		
Booklet Details					
	Binding Direction	Left Binding / Top Binding	Left Binding / Top Binding	Left Binding / Top Binding	

		Right Binding / Bottom Binding	Right Binding / Bottom Binding	Right Binding / Bottom Binding	
	Border	Off	Off	Off	
		On	On	On	
Select Color		Auto Color	Auto Color	Auto Color	
		Gray Scale	Gray Scale	Gray Scale	
Font Settings					
	Download	N/A	Auto	N/A	
	Font	Outline	Outline	Outline	
	Format	Bitmap	Bitmap	Bitmap	
		N/A	Native TrueType	Native TrueType	
	Use Printer	Off	Off	Off	
	Fonts	On	On	On	
Configure and Settings Tab					
Software Tools		Web Connection	Web Connection	Web Connection	
EMF Spool		Off	N/A	N/A	
		On	N/A	N/A	
Display		Off	Off	Off	
Constraint		On	On	On	
Message					
Display paper		Off	Off	Off	
set in Print		On	On	On	
Server					
Properties					

"N/A": Not Available

Table 2-4-2 baseline PCL / PS / PCL5 Driver functions

Supported PDL Protocols

- KONICA MINOLTA Universal PCL: PCLXL Protocol 2.0
- KONICA MINOLTA Universal PS: Postscript Level 3
- KONICA MINOLTA Universal PCL5 : PCL5c/PCL5e

Even if PDL is shown as supported, printing may not be possible if the output device's protocol is below that of the UPD.

3. Installing, Uninstalling, and Updating the UPD

3.1 Summary

By using the included installer/uninstaller, you can easily install or uninstall the KONICA MINOLTA Universal Print Driver.

NOTE: Perform a manual installation and uninstallation in a Microsoft Cluster Service or Citrix environment.

NOTE: You can also manually install or uninstall.
Updates cannot be performed manually.

NOTE: This update is only for KONICA MINOLTA Universal Print Driver Version 2.0.2.0 or later.

If you are using older version than 2.0.2.0, please update to 2.0.2.0 or later before updating to this version.

3.2 Install

- **Method 1: Installing in “Network Search” by using the Included Installer**
 1. Execute "UPDSetup.exe".
 2. Check the Software End User License Agreement, and if there are no problems, click **Agree**.

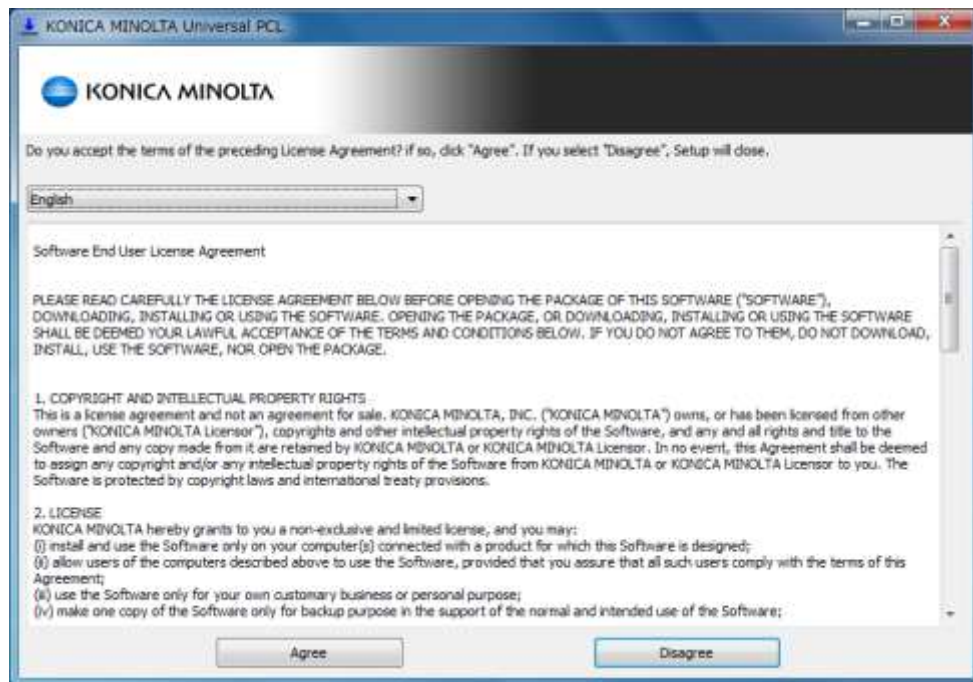


Figure 3-2-1 Software End User License Agreement Dialog Box

3. Click **Install (Network Search)**.

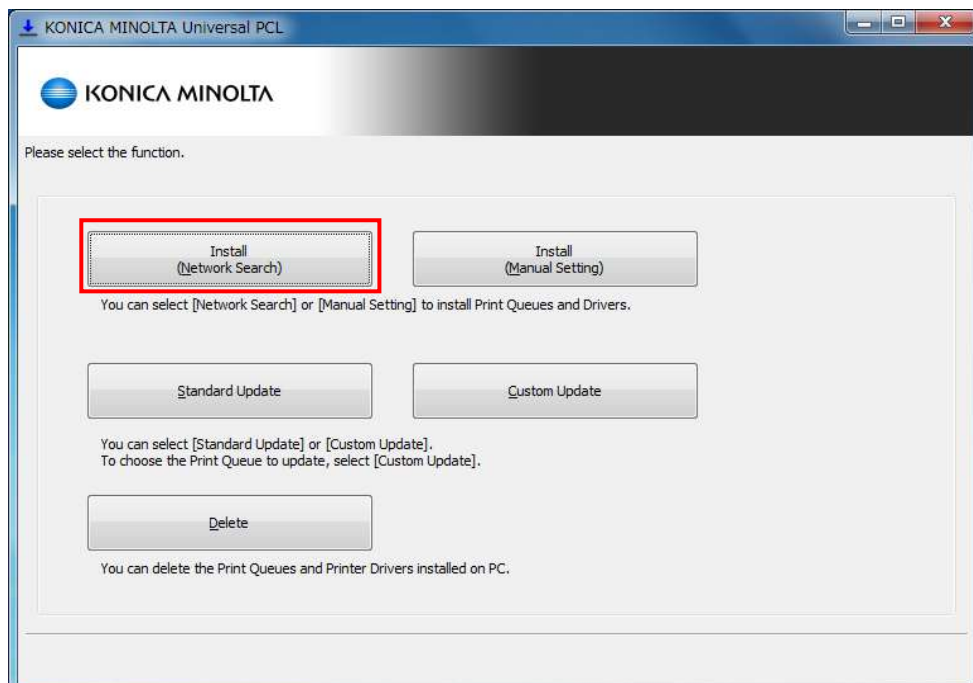


Figure 3-2-2 Function Selection Dialog Box - Install (Network Search)

4. Starting search devices on the network. Click **Cancel** if you want to stop searching.

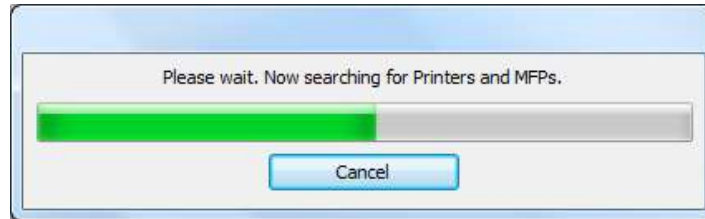


Figure 3-2-3 Searching Dialog Box

5. Devices found in the search will be displayed in a list.

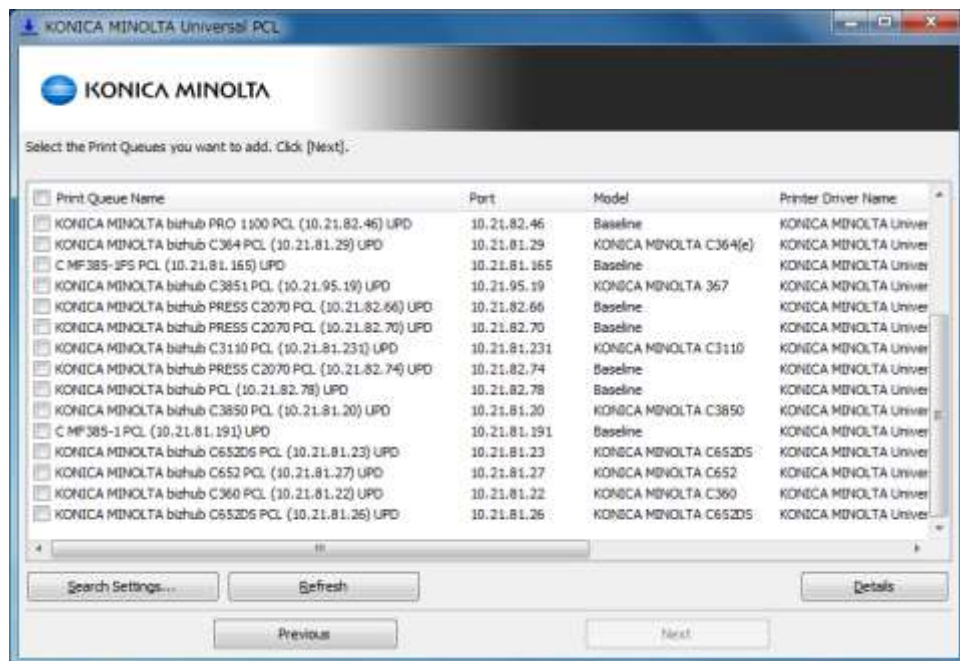


Figure 3-2-4 Device list Dialog Box

6. Settings such as Print Queue Name and Printer Driver Name will be displayed by clicking **Detail**. Check the device you want to install and click **Next**.

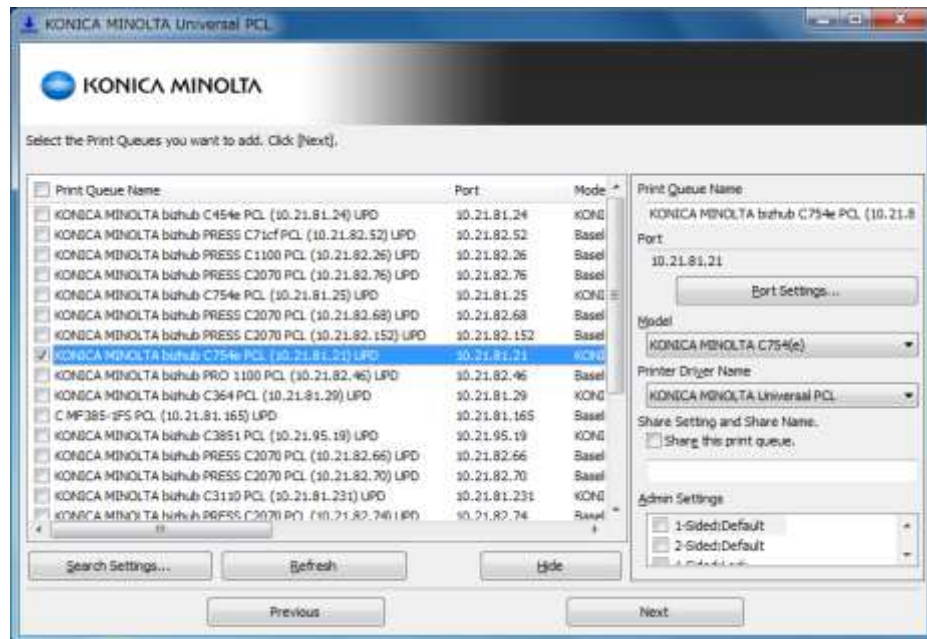


Figure 3-2-5 Device list Dialog Box (Detail)

- Confirmation dialog will be displayed. Click **Install** to start installing.

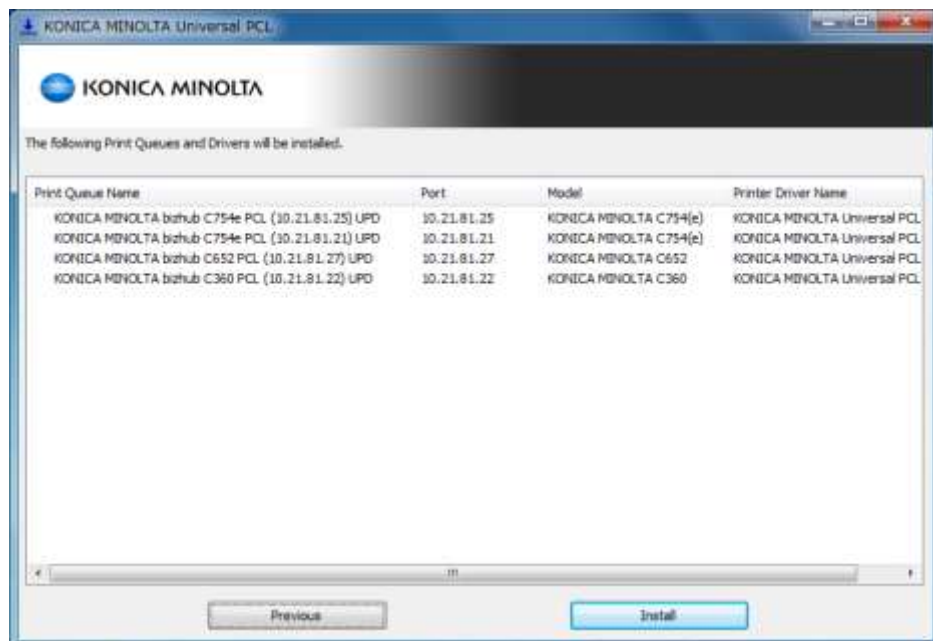


Figure 3-2-6 Installation confirmation Dialog Box

- Progress of the installation will be displayed.

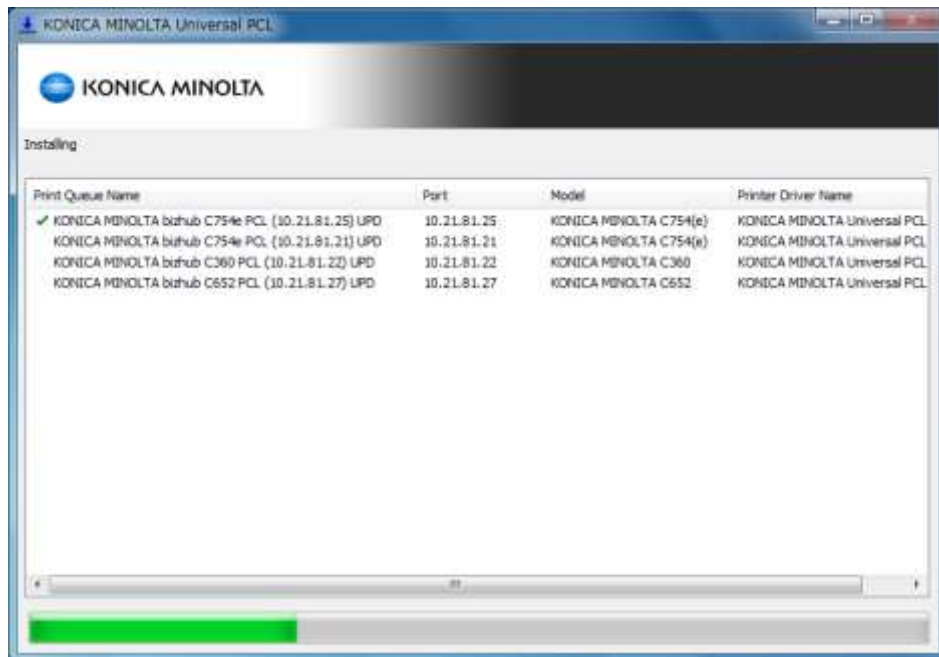


Figure 3-2-7 Installation process Dialog Box

9. The installation is complete.

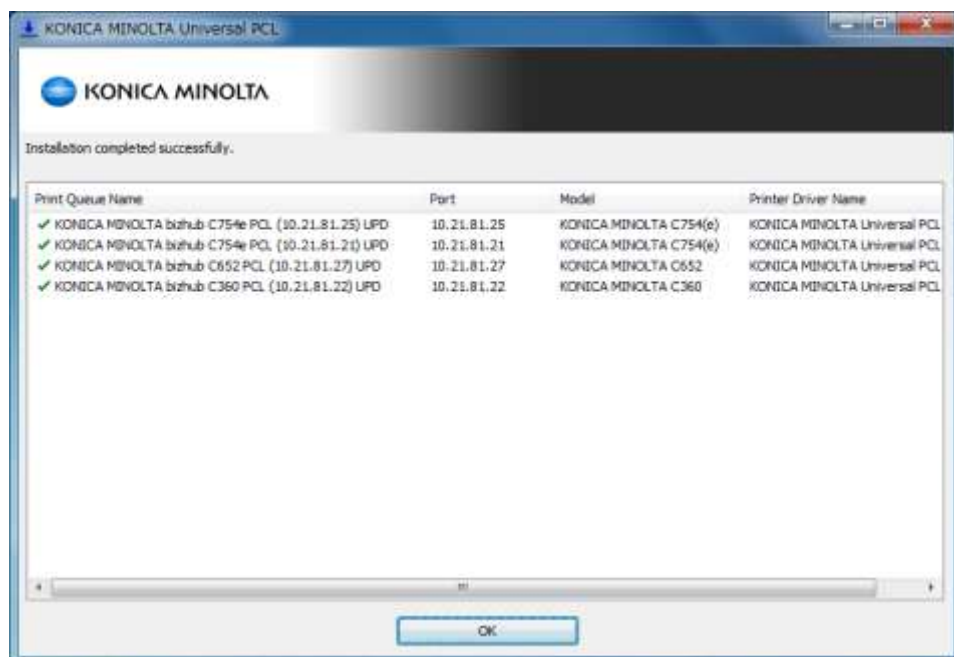


Figure 3-2-8 Installation complete Dialog Box

- Method 2: Installing in “Network Search” by using the Included Installer

1. Execute "UPDSetup.exe".
2. Check the Software End User License Agreement, and if there are no problems, click **Agree**.

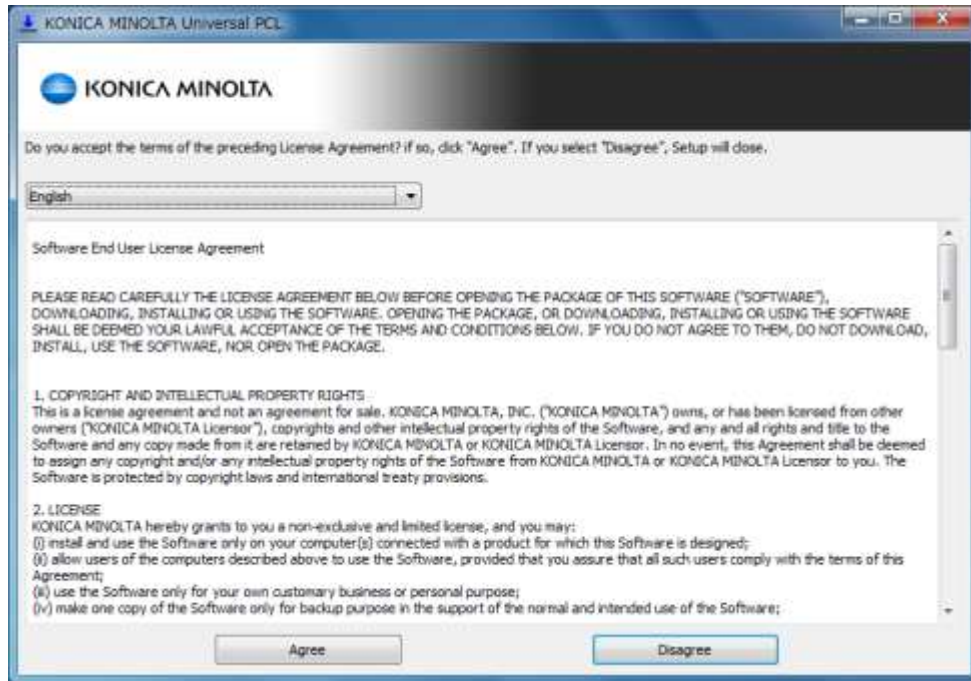


Figure 3-2-9 Software End User License Agreement Dialog Box

3. Click **Install (Manual Setting)**.

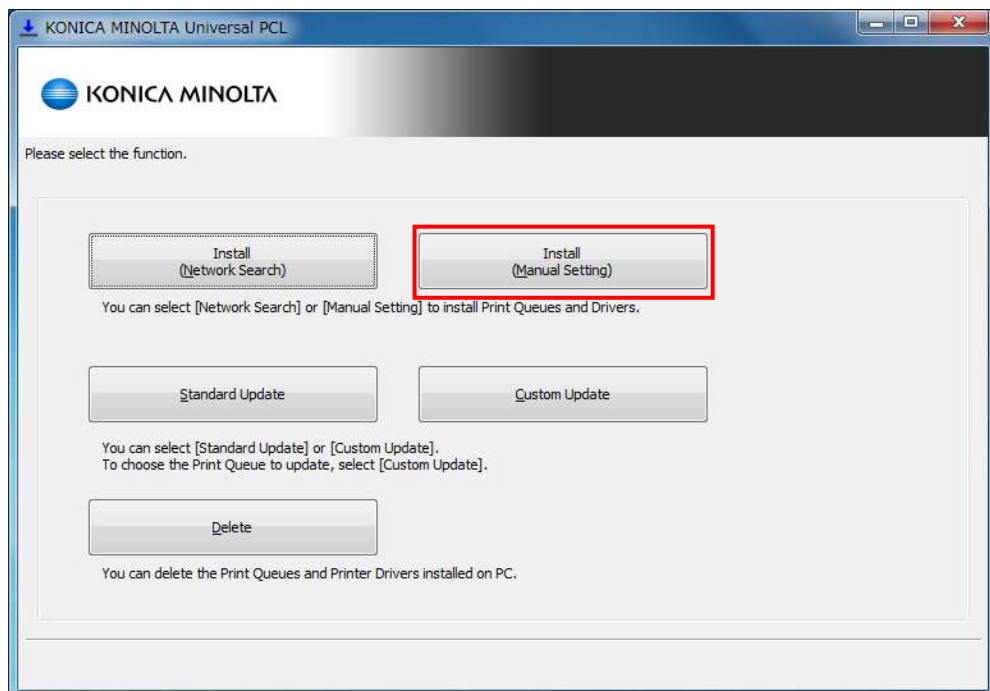


Figure 3-2-10 Function Selection Dialog Box - Install (Manual Setting)

- Setting dialog box will be displayed. Click **Add to list** at the bottom left to add a row to the list.

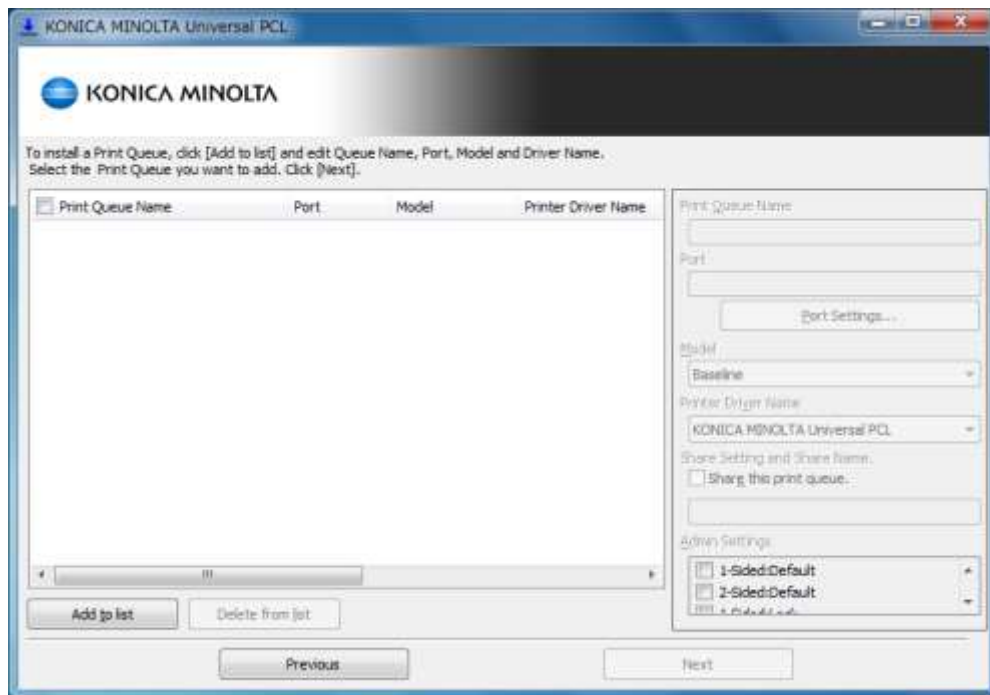


Figure 3-2-11 Install (Manual Setting) Dialog Box

- Select the added row, and enter information such as Print Queue Name and Port on the right side of the setting dialog. Make sure that you have checked on the beginning of the row you want to add the print queue and click **Next**.

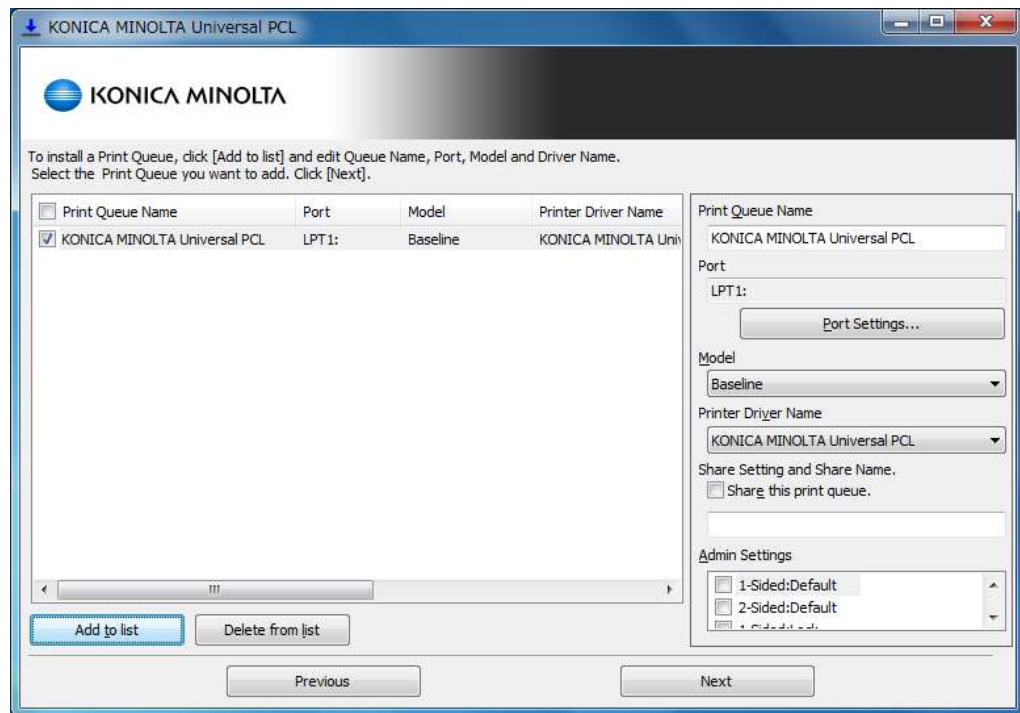


Figure 3-2-12 Install (Manual Setting) Dialog Box (continue)

6. The following procedure is same as procedure 7 and later of **Method 1: Installing in “Network Search” by using the Included Installer.**

● **Method 3: Manual Installation**

Install the driver using the Windows "Add Printer" wizard. You can access the "Add Printer" wizard from the Printers folder.

NOTE: When installing on Microsoft Cluster Service, install from the active node.

NOTE: In this document, the term "Printers" folder refers to the following folder.

- Windows XP / Server 2003: "Printers and Faxes" folder
 - Windows Vista / Server 2008: "Printers" folder
 - Windows 7 / Server 2008 R2: "Devices and Printers" folder
-

3.3 Uninstall

● **Method 1: If You Installed the Software Using the Included Installer**

If you installed UPD using the included installer, then the uninstaller is installed on your operating

system. Use that to uninstall the software.

1. Use one of the following methods to start the uninstaller.
 - Run [Start] menu -> [All Programs] -> [KONICA MINOLTA] -> [Universal PCL(PS / PCL5)] -> [Uninstall Printer Driver]
 - Select [Control Panel] -> [Programs and Features] and double click [KONICA MINOLTA Universal PCL(PS / PCL5)]
2. Print Queue and Printer Driver which can be deleted will be displayed. Check on what you want to delete and click **Next**.

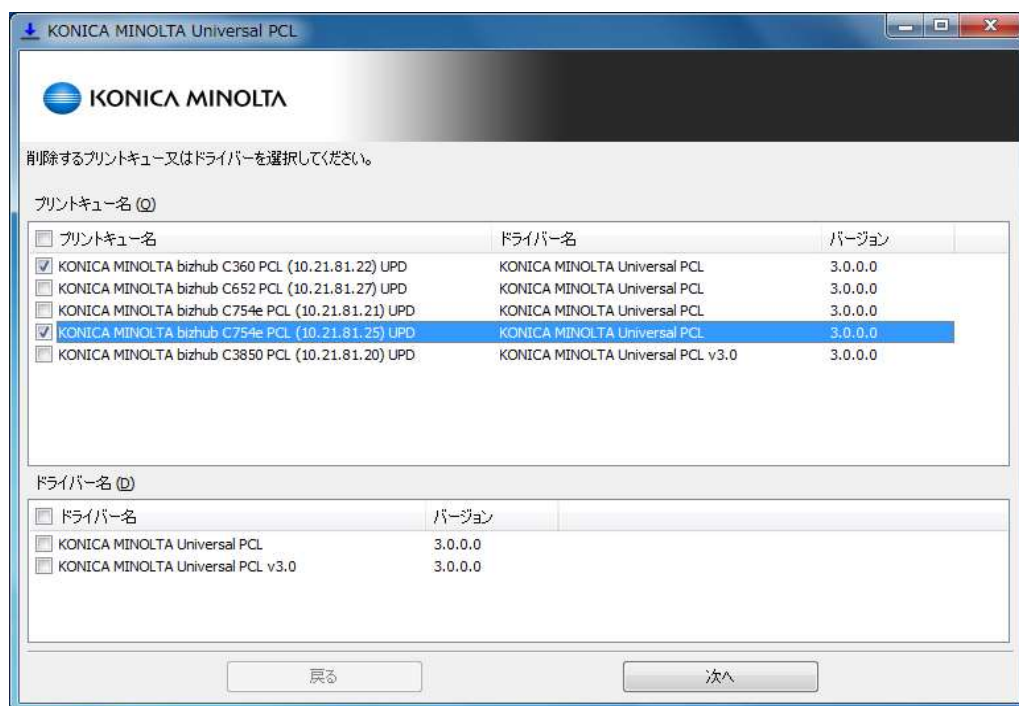


Figure 3-3-1 Uninstall target selection Dialog Box

3. If you selected to delete Printer Driver, all Print Queues that use the Printer Driver will be deleted.

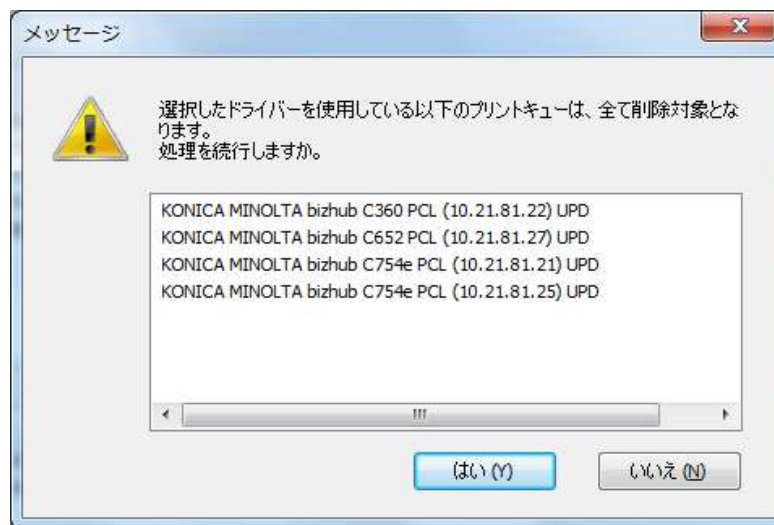


Figure 3-3-2 Uninstall impact notification Dialog Box

4. The confirmation dialog of uninstallation will be displayed.

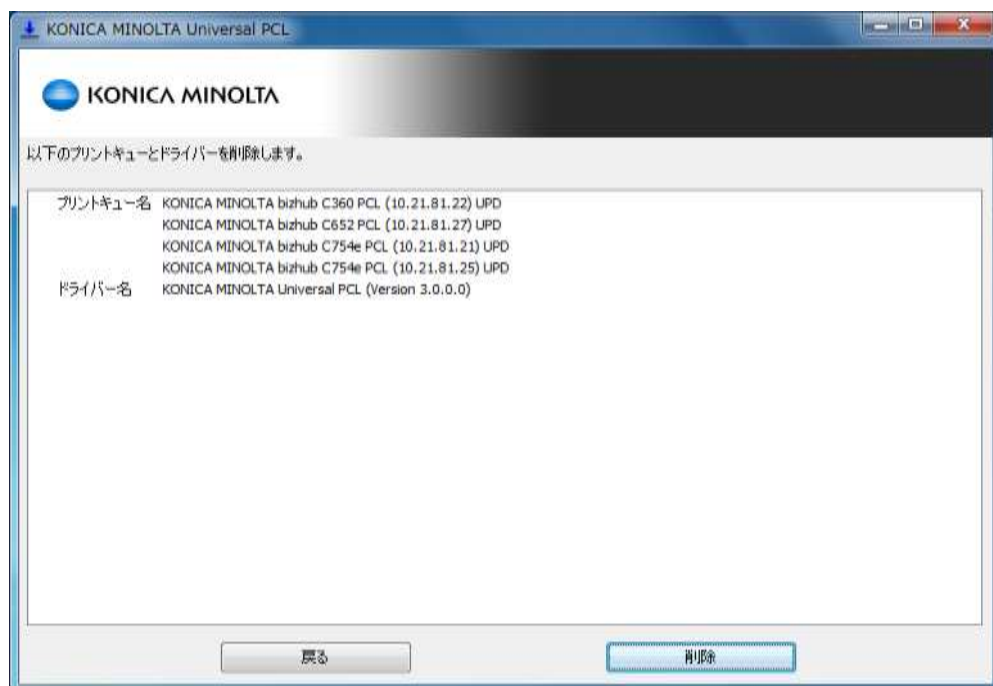


Figure 3-3-3 Uninstallation Details Confirmation Dialog Box

5. Progress of the Uninstallation will be displayed.

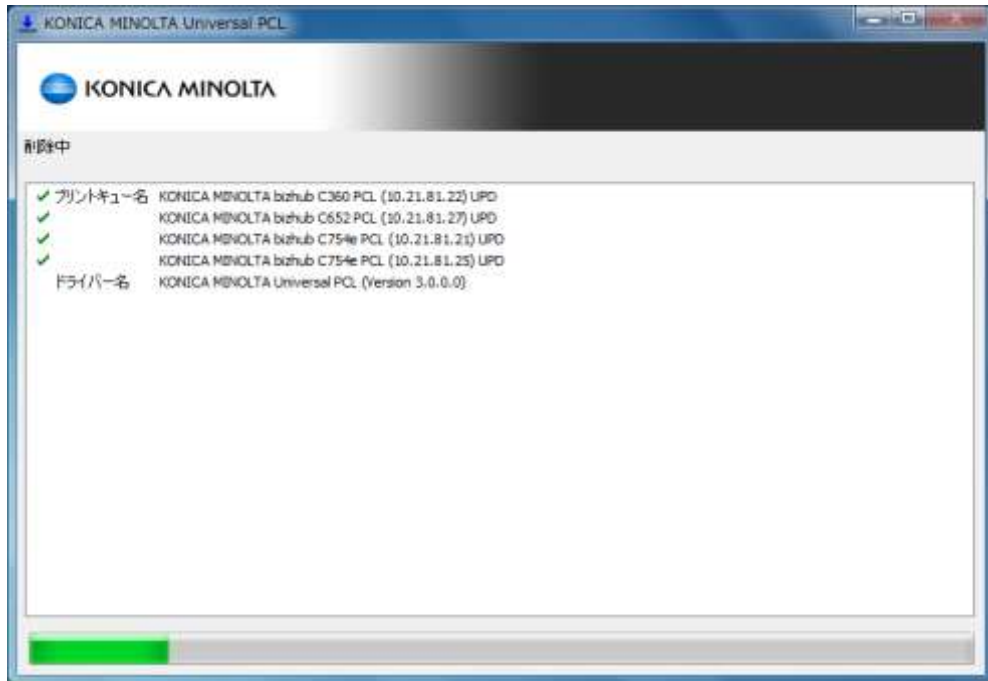


Figure 3-3-4 Uninstalling Dialog Box

6. The uninstallation is complete.

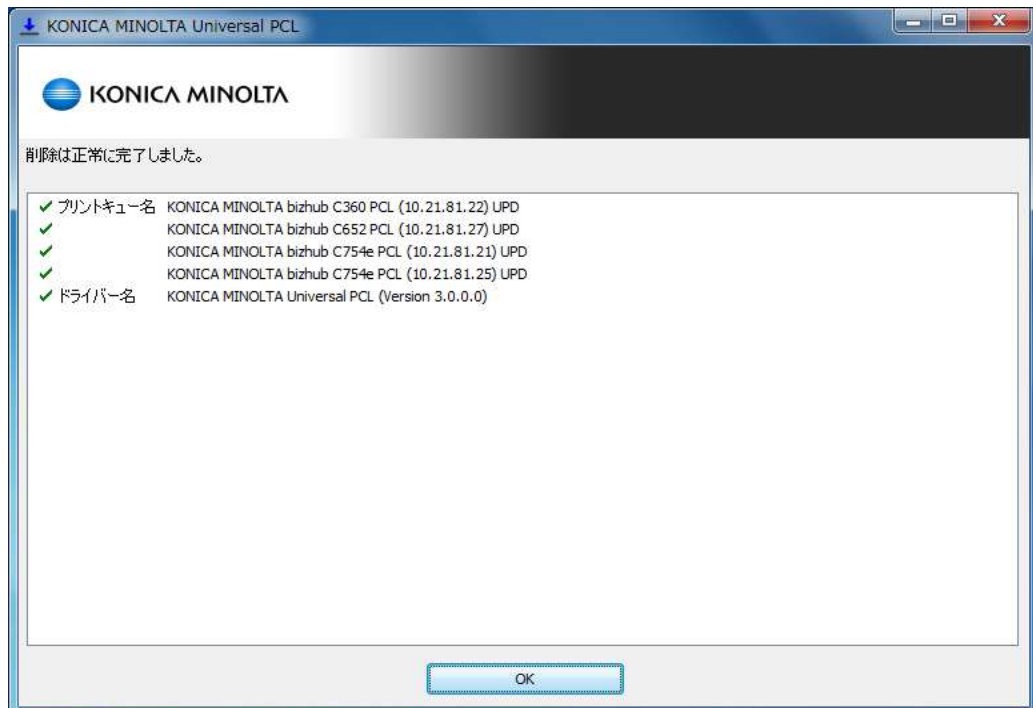


Figure 3-3-5 Uninstallation Complete Dialog Box

- **Method 2: Manual Uninstallation**

If you installed UPD manually, you must uninstall it manually by following the procedure below.

1. From the Printers folder, delete the "KONICA MINOLTA Universal PCL (PS / PCL5)" printer icon.
2. From the "Print Server Properties" dialog box, on the "Drivers" tab, delete "KONICA MINOLTA Universal PCL (PS / PCL5)".
3. From the **Start** menu, specify "regedit.exe". The registry editor starts.
4. In the registry editor, delete the following keys, then close the registry editor.
 - PCL
<HKEY_CURRENT_USER\Software\KONICA MINOLTA\KONICA MINOLTA Universal PCL>
 - PS
<HKEY_CURRENT_USER\Software\KONICA MINOLTA\KONICA MINOLTA Universal PS >
 - PCL5
<HKEY_CURRENT_USER\Software\KONICA MINOLTA\KONICA MINOLTA Universal PCL5>
5. Delete the following folders if they exist.
 - 32bit OS(Windows XP(x86)/Server 2003(x86)/Vista(x86)/Server 2008(x86)/7(x86))
<%SystemRoot%\system32\spool\drivers\w32x86\konica_minoltauniverfe32>
 - 64bit OS(Windows XP(x64)/Server 2003(x64)/Vista(x64)/Server 2008(x64)/7(x64))
<%SystemRoot%\system32\spool\drivers\x64\konica_minoltauniverfe33>

- **Uninstalling Using Point and Print**

When using Point and Print, the driver needs to be removed also from the client side. Follow the steps below to remove the driver.

1. On the client PC, open the Printers folder.
2. Delete all shared UPD printer icons.
3. From the "Print Server Properties" dialog box, on the "Drivers" tab, delete "KONICA MINOLTA Universal PCL (PS / PCL5)".
4. In the registry editor, delete the following keys, then close the registry editor.
 - PCL
<HKEY_CURRENT_USER\Software\KONICA MINOLTA\KONICA MINOLTA Universal PCL>

- PS
<HKEY_CURRENT_USER\Software\KONICA MINOLTA\KONICA MINOLTA
Universal PS>
- PCL5
<HKEY_CURRENT_USER\Software\KONICA MINOLTA\KONICA MINOLTA
Universal PCL5>

3.4 Update

NOTE: When update from UPD Ver.2, only information of the models that had be selected and information of Print Queue (Print Queue Name, Port, Location, Comment, Sharing Setting, Sharing Name) can be taken over.

- **Method 1: Updating in “Standard Update” by using the Included Installer**
 1. Execute "UPDSetup.exe" on the PC on which the old Universal Print Driver is installed.
 2. Check the Software End User License Agreement, and if there are no problems, click **Agree**.

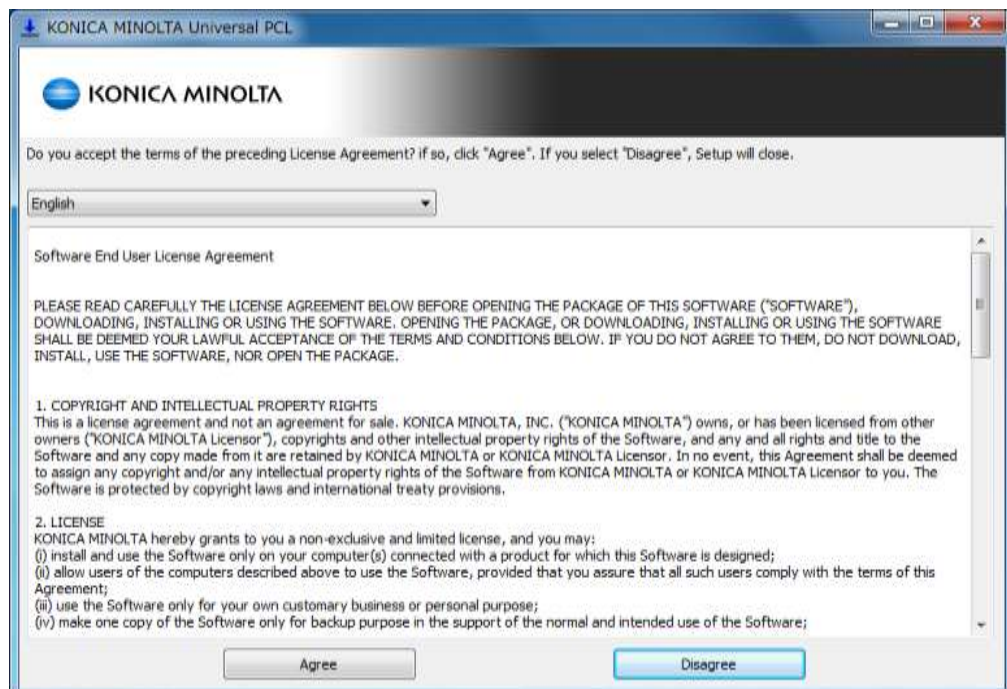


Figure 3-4-1 Software End User License Agreement Dialog Box

3. Click **Standard Update**.

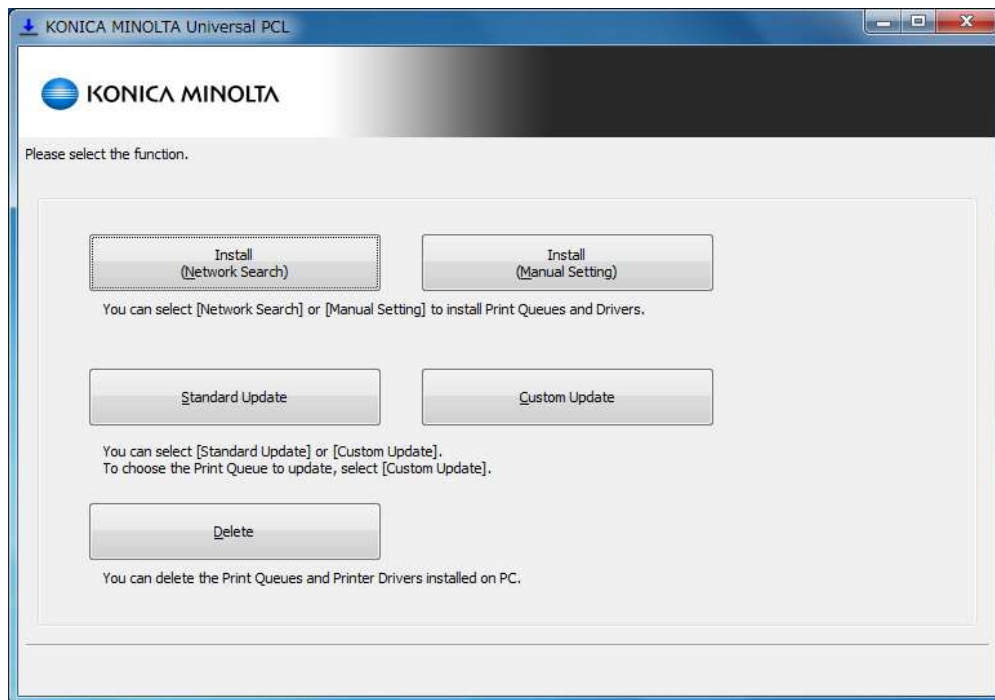


Figure 3-4-2 Function Selection Dialog Box - Standard Update

4. Print Queues that are using the Printer Driver of update target will be displayed. All displayed Print Queue will be updated. Click **Update**.

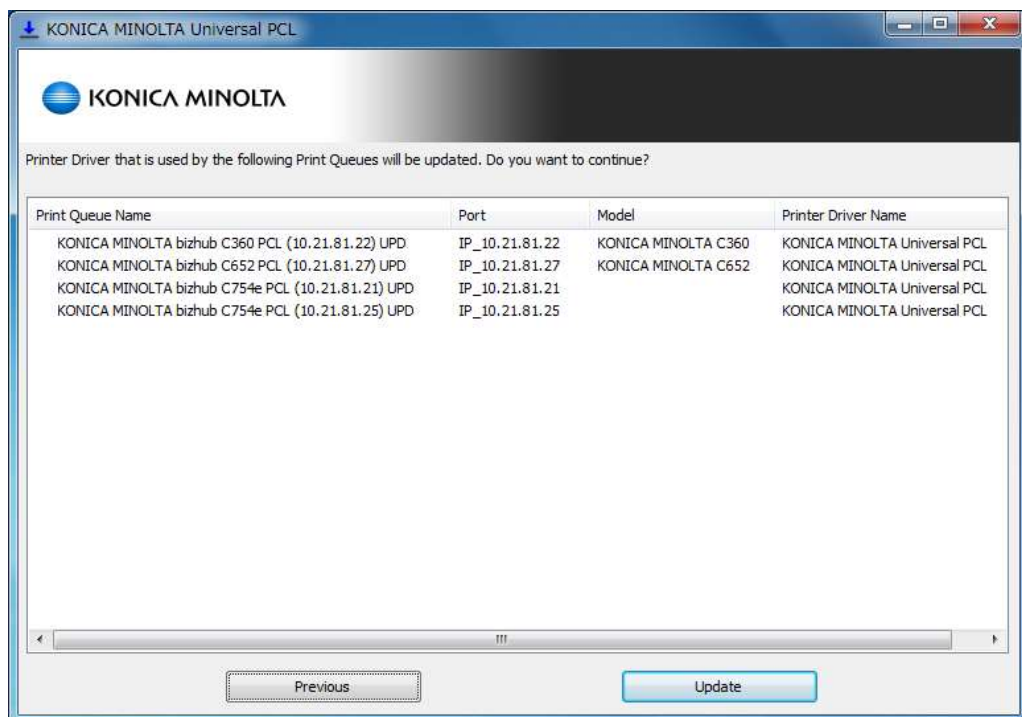


Figure 3-4-3 Update Target Confirmation Dialog Box

5. Staring update.

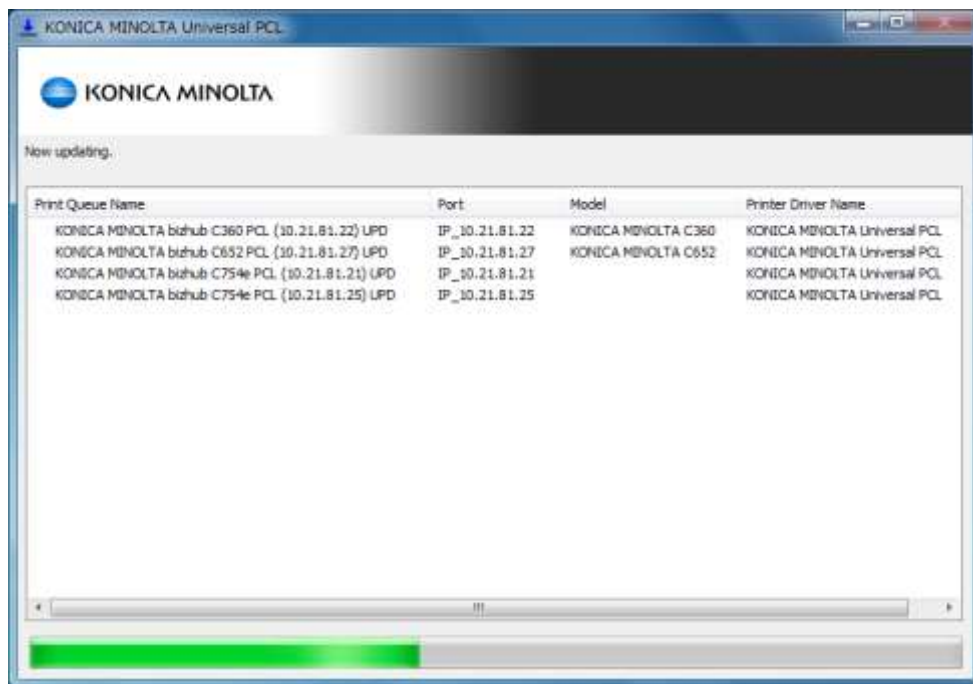


Figure 3-4-4 Updating process Dialog Box

6. The update is complete.

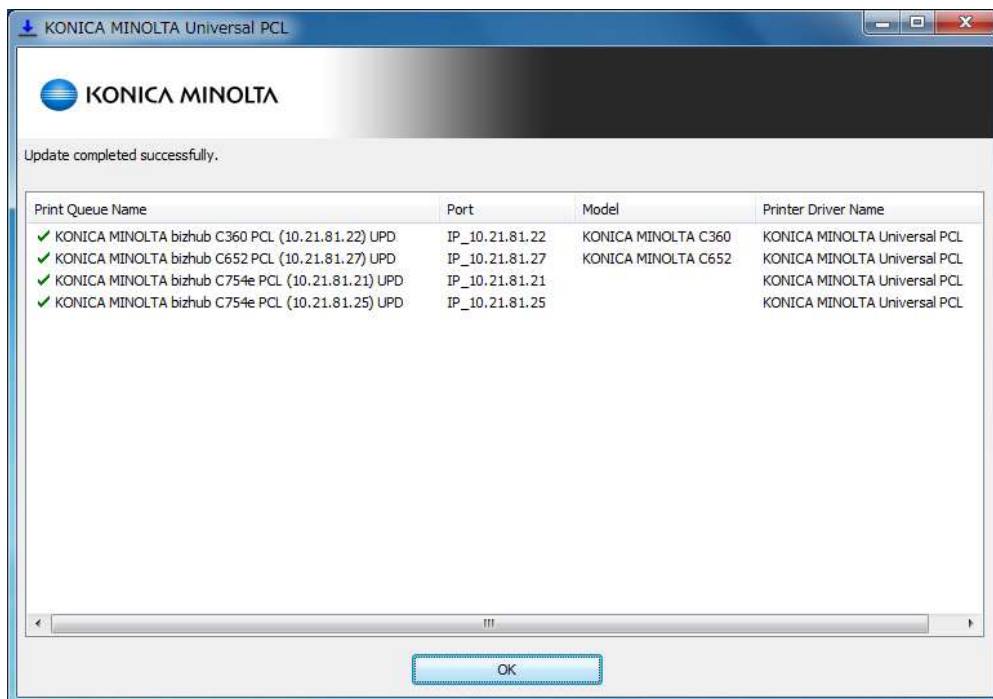


Figure 3-4-5 Update Complete Dialog Box

- **Method 2: Updating in “Custom Update” by using the Included Installer**

1. Execute "UPDSetup.exe" on the PC on which the old Universal Print Driver is installed.
2. Check the Software End User License Agreement, and if there are no problems, click **Agree**.

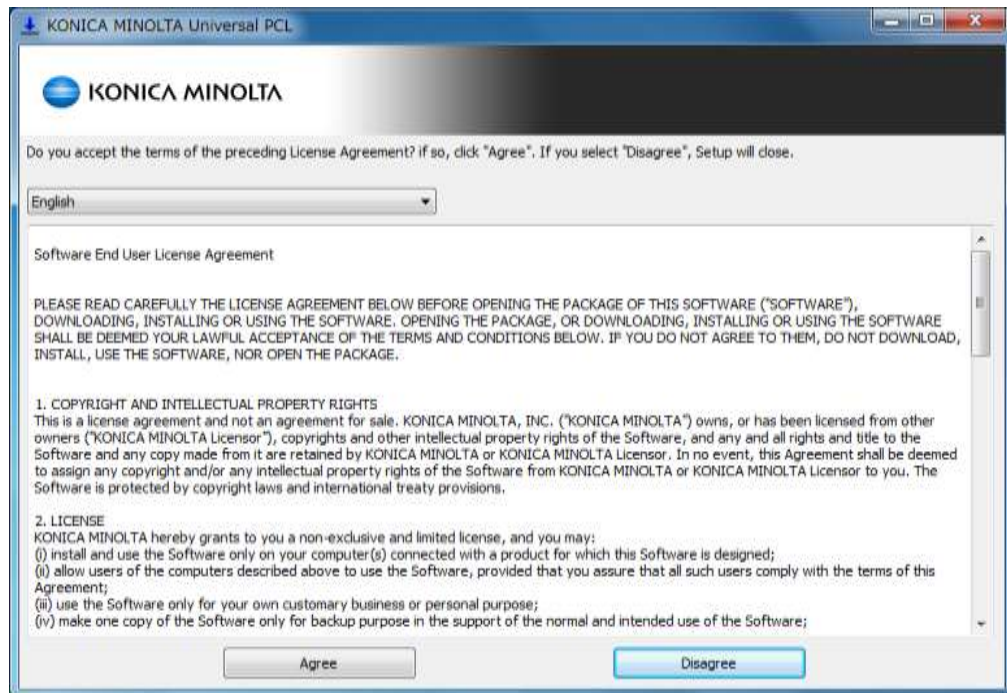


Figure 3-4-6 Software End User License Agreement Dialog Box

3. Click **Custom Update**.

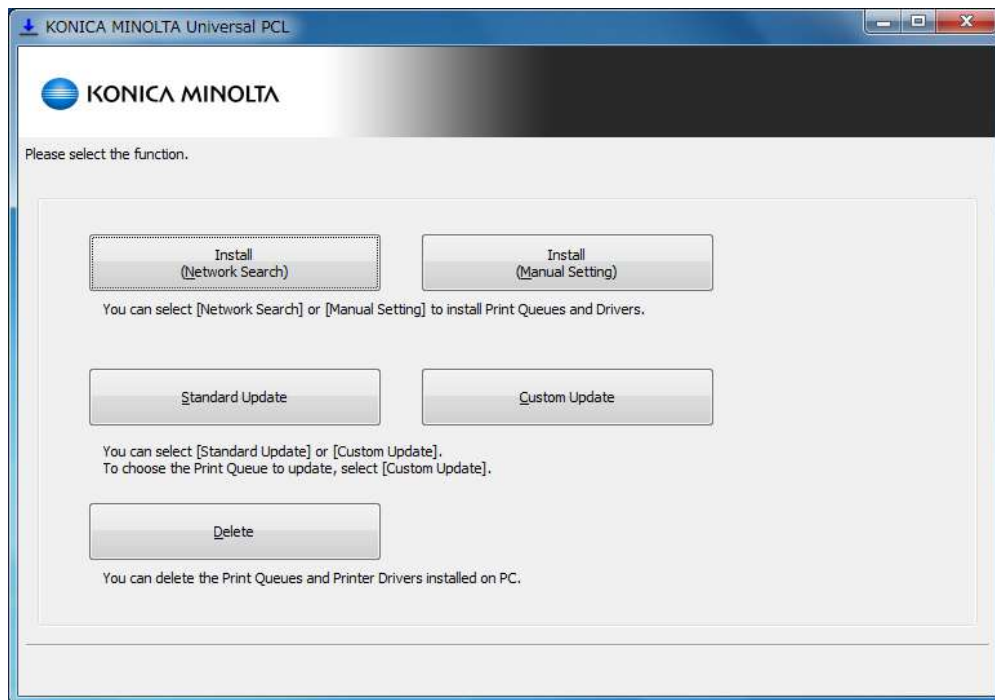


Figure 3-4-7 Function Selection Dialog Box – Custom Update

4. Print Queues that are using the Printer Driver of update target will be displayed. Check the Print Queue you want to update and click **Next**. You can also select the driver name you want to update to.

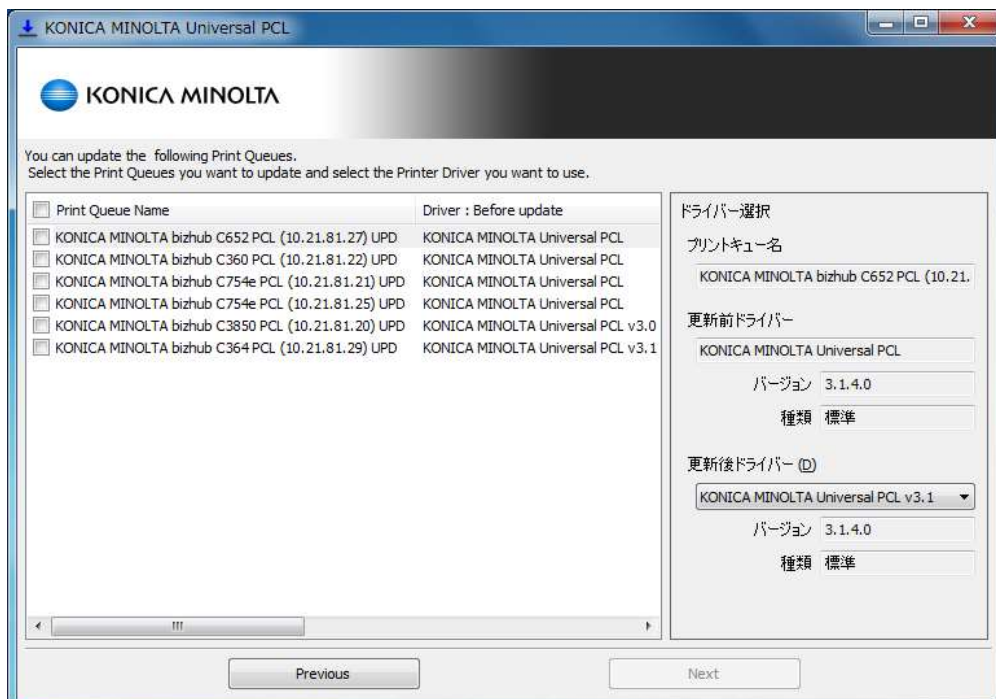


Figure 3-4-8 Update Target Selection Dialog Box

5. If you selected to update the standard Printer Driver, all Print Queues that use the Printer Driver will be update.

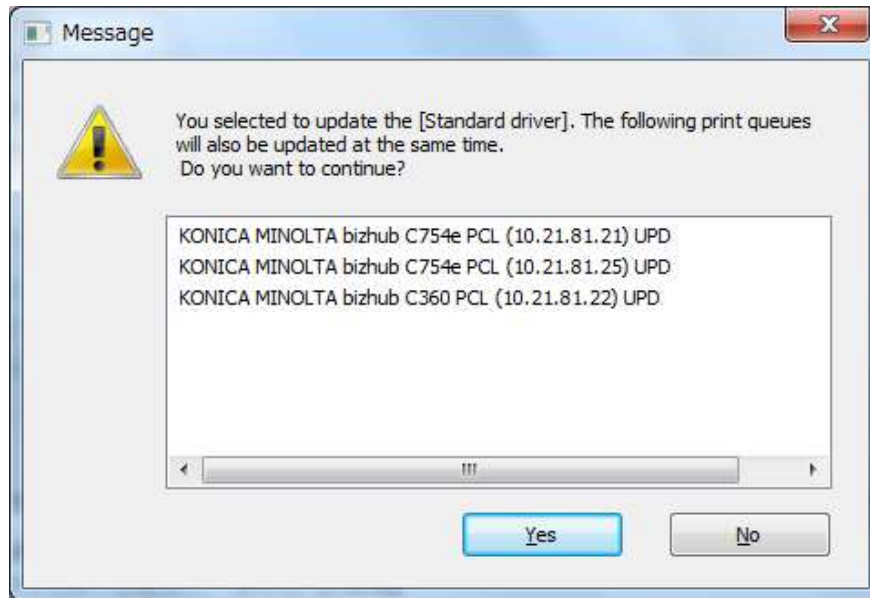


Figure 3-4-9 Update impact notification Dialog Box

6. The confirmation dialog of update will be displayed. Click **Update**.

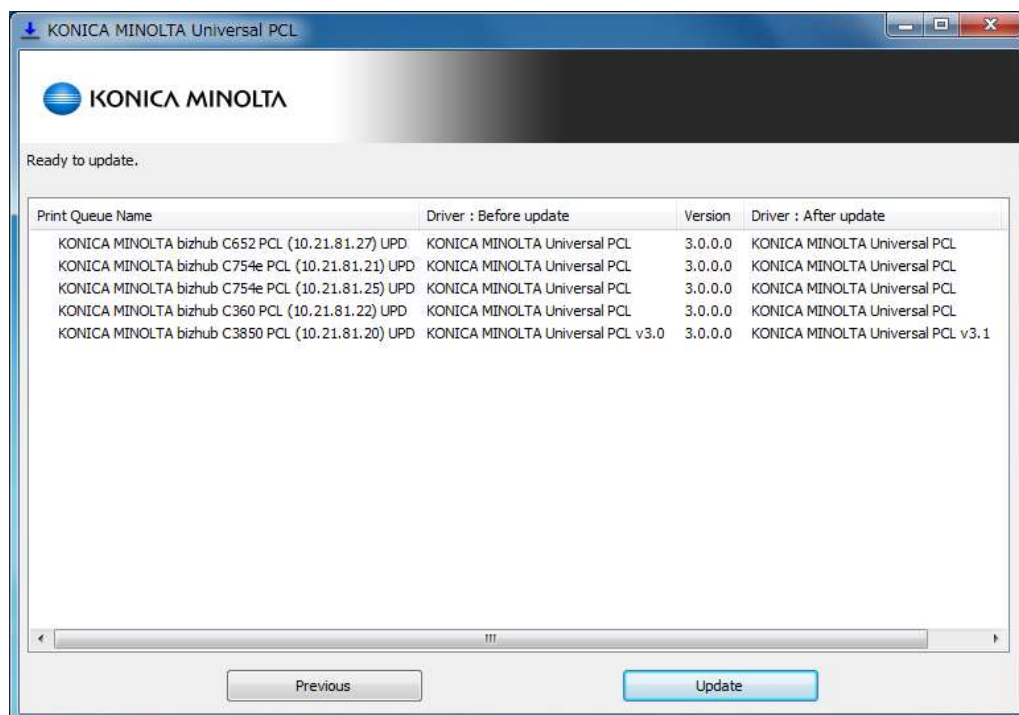


Figure 3-4-10 Update Confirmation Dialog Box

7. Starting update.

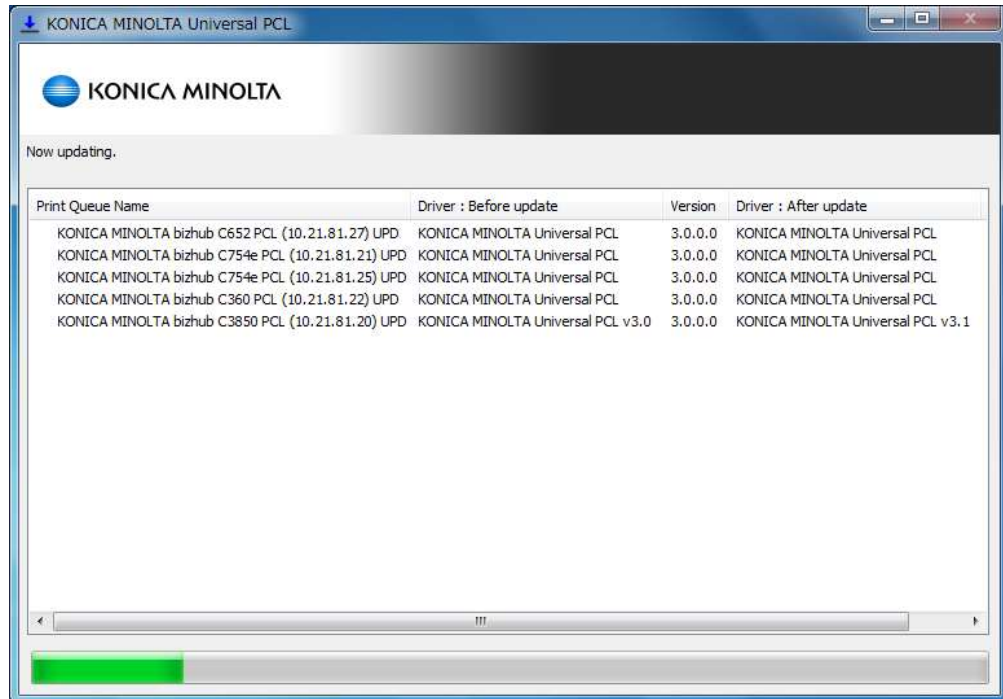


Figure 3-4-11 Updating process Dialog Box

8. The update is complete.

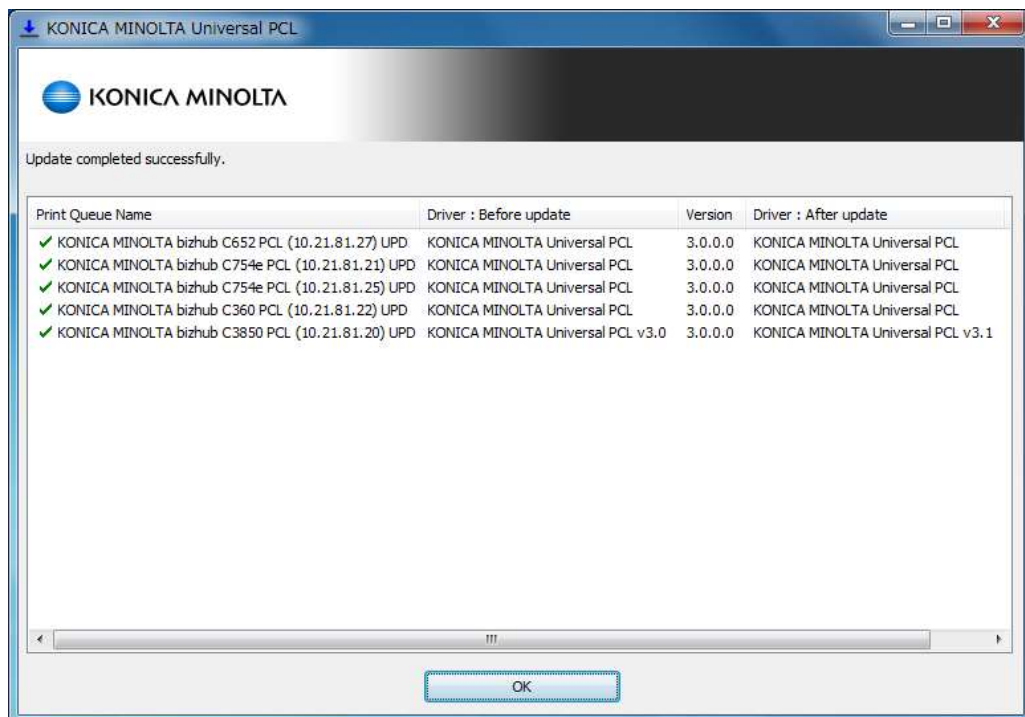


Figure 3-4-12 Update Complete Dialog Box

3.5 Supporting New Models

You can use UPD to print with any device that was released for sale after the release of your UPD version, by using the following model included in UPD.

Types of common models

- KONICA MINOLTA A4 common
- KONICA MINOLTA A3 commonr
- baseline

Please note, however, that the less functionality will be available than the printer driver that is included on the CD-ROM.

4. Use Universal Print Drivers

4.1 Model changing method

In KONICA MINOLTA Universal Print Driver, you can change the model to be used from the driver UI. Only users who have administrator privileges can change the model.

Procedure of model changing

1. Open **Printer Property** view.
2. Select **Configure** tab, click **Select Model**.

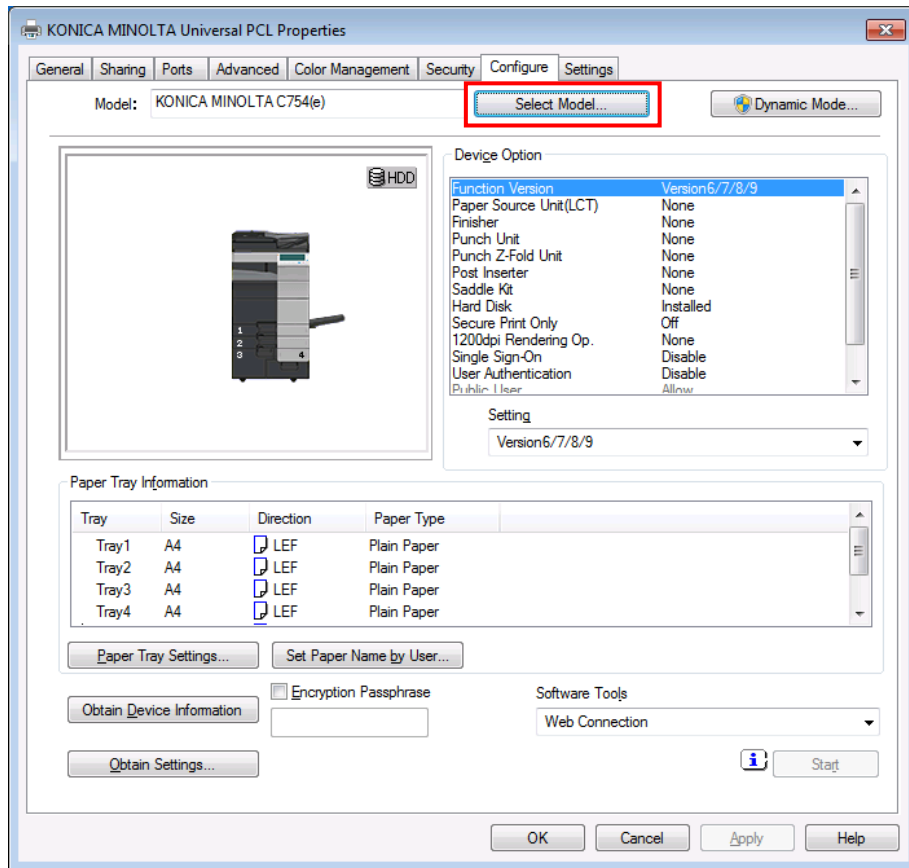


Figure 4-1-1 Configure tab of Printer Property

3. Model selection dialog will be displayed. Select model and click **OK**. If you click **Auto**, it will communicate with the device specified in the port and determine the model automatically.

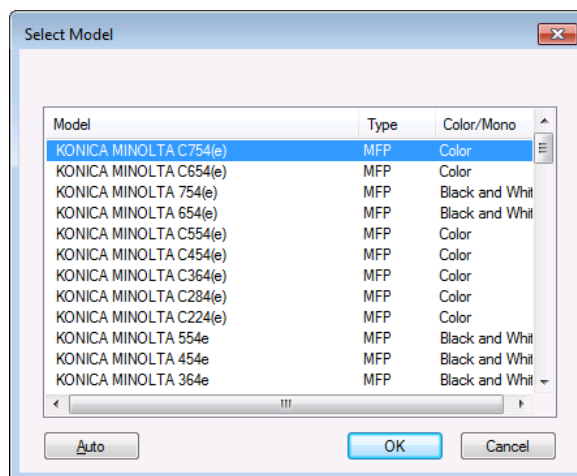


Figure 4-1-2 Model selection Dialog Box

4. Confirmation dialog will be displayed. Click **Yes**.



Figure 4-1-3 Confirmation Dialog Box

4.2 Using Device Selector

This section describes how to change the printing device using Device Selector. In Device Selector, you can select devices using one of three methods: Manual Connection, History and Network Search. Note that Device Selector is not available to some users, such as restricted user accounts. (See the FAQ below for details.)

Manual Connection

Use Manual Connection to select the printer device manually. The procedure is as follows.

1. From the Windows Printers folder, right click on the "KONICA MINOLTA Universal PCL (PS / PCL5)" icon, and select Printer Properties.
2. The Printer Properties of KONICA MINOLTA Universal Print Driver opens.
3. Move to Configure tab and push "Dynamic Mode..." button.
4. Select "Manual Connection" from the pull-down list at the top of the Device Selector dialog box.

Note: If the Device Selector is open, the Manual Connection view appears by default.

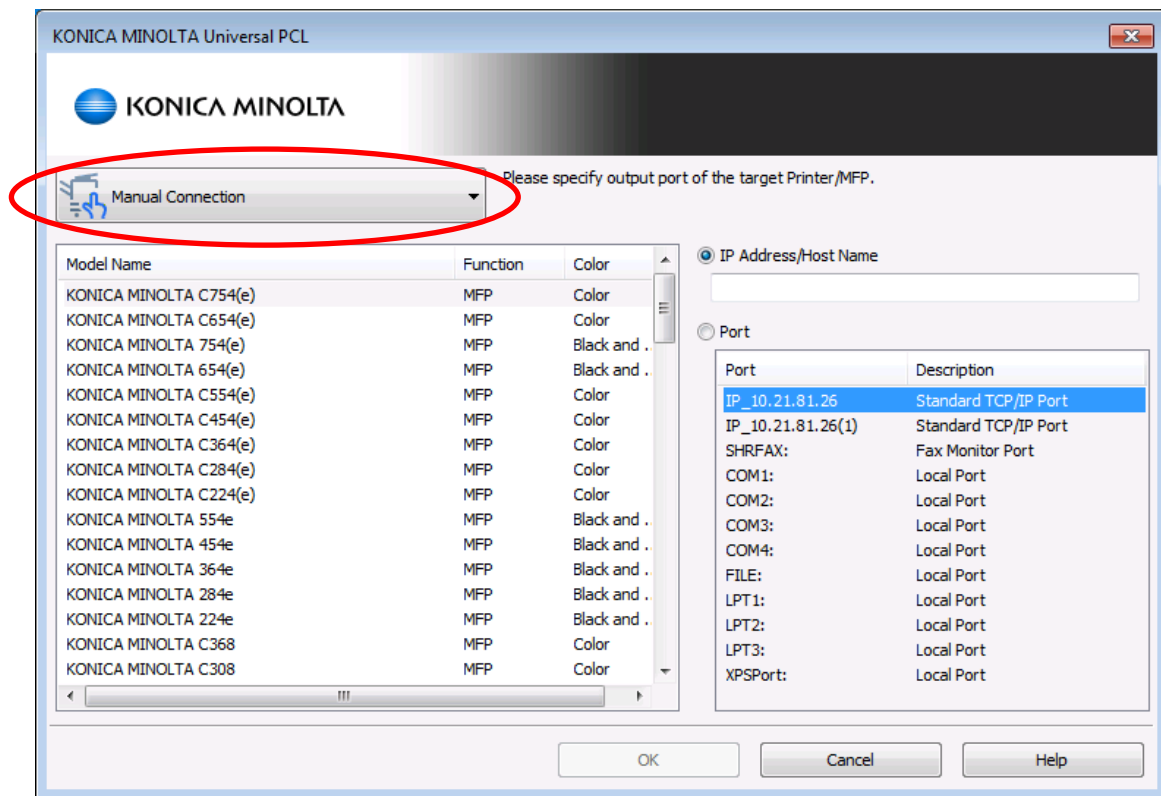


Figure 4-2-1 Example of Manual Connection View

5. Select the model to use from the list on the left of the dialog box.
6. Specify the connection in the right-hand side of the dialog box. There are two ways to specify the connection, as shown below.

- IP Address/Host Name

You can specify the connection by entering the IPv4 address, IPv6 address, or host name directly. Fully Qualified Domain Names (FQDN) cannot be used.

NOTE: Up to 48 characters can be entered for the IP Address/Host Name. You cannot use commas (,).

- Port

Specify the output device by the port registered with the operating system.

7. After you have specified the model and connection, click **OK**.

History

You can connect to a device you have connected based on your history information. The procedure is as follows.

1. From the Windows Printers folder, right click on the "KONICA MINOLTA Universal PCL

- (PS / PCL5)" icon, and select Printer Properties.
2. The Printer Properties of KONICA MINOLTA Universal Printer Driver opens.
 3. Move to Configure tab and push "Dynamic Mode..." button.
 4. Select "History" from the pull-down list at the top of the Device Selector dialog box.

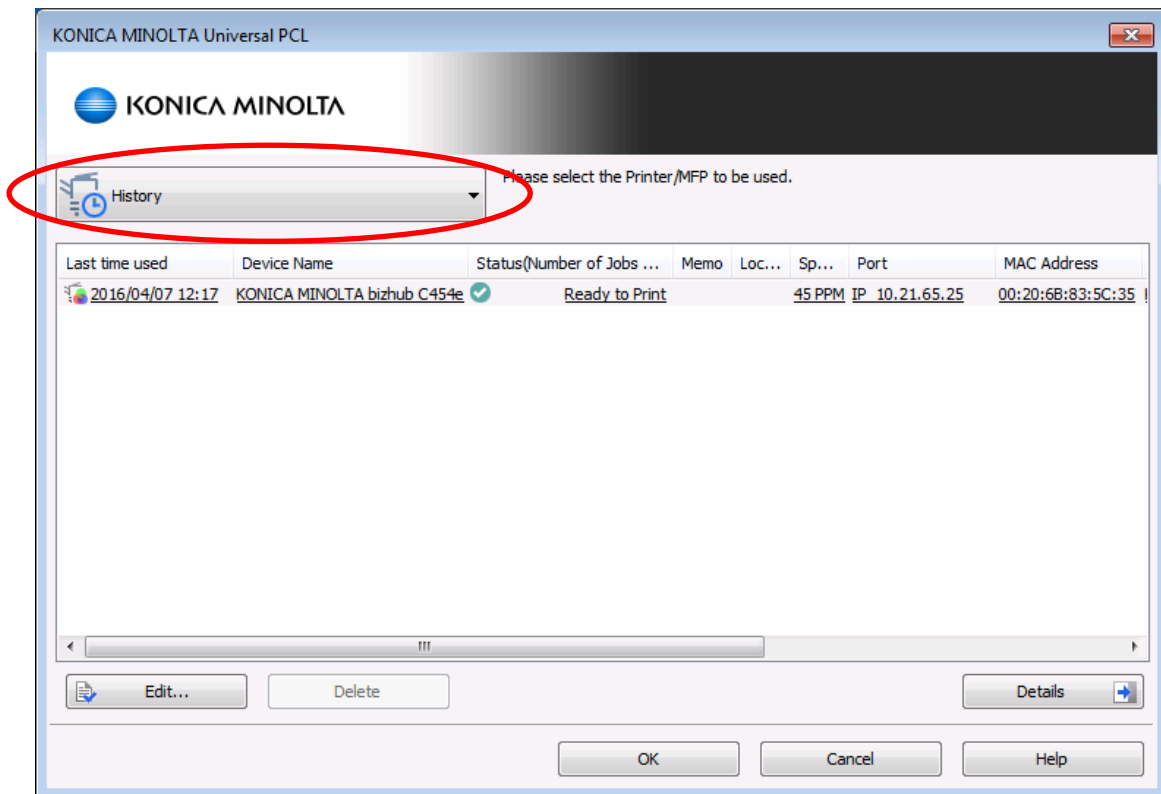


Figure 4-2-2 Example of History View

5. A list of the devices you have connected to appear in the dialog box.

The following information is displayed for each device.

Column Name	Description
Last time used	This shows the printer-type icon and the last time the device was used. See Table 1-2-1 Printer Type Icons for information about the printer-type icons.
Device Name	This shows the name of the device.
Status(Number of Jobs Waiting)	This shows the device status and job-queue congestion as an icon and text. The display of the job queue status is only supported for KONICA MINOLTA devices. See Status Icon Specification , below, for details.
Memo	This shows the text you entered in Figure 4-2-2 History Edit Dialog Box .
Location	This shows the location where the device is installed. The location must be entered on the device beforehand.
Speed	This shows the maximum print speed of the device in PPM.
Port	This shows the port of the output device.
MAC Address	This shows the MAC address of the device.
Model Name	This shows the model name of the device.
Color/Black and White	This shows whether the device is a color or B&W printer.
PS3 (Only for PS version) PCL6 (Only for PCL6 version) PCL5(Only for PCL5 version)	This shows whether the device supports target PDL. Devices that do not support target PDL cannot be used.

Table 4-2-1 Details about Devices in the History View

You can use the Edit and Delete functions to edit the list of devices on the History view.

- Edit function

You can use the Edit dialog box below to edit the device's Memo column. You can start the Edit dialog box using one of the two methods shown below.

- Select the device, and click **Edit** at the bottom of the dialog box.
- Right click on the device to edit, and select **Edit** from the menu.

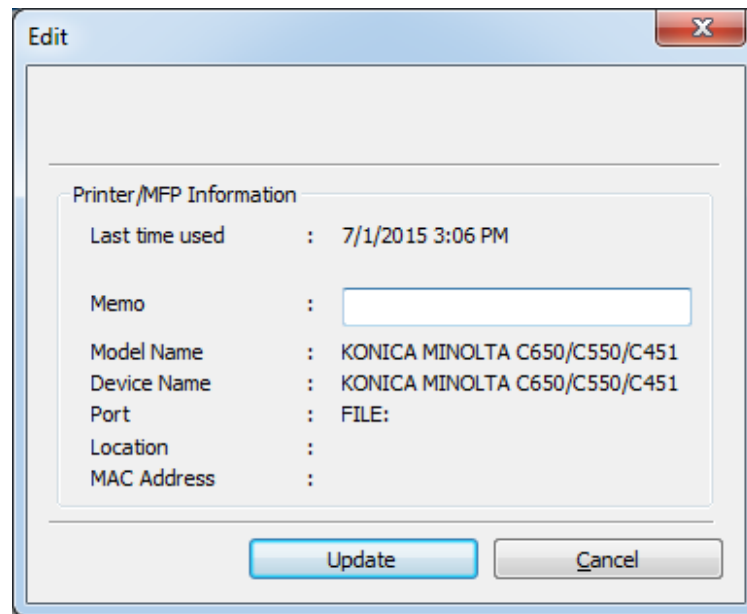


Figure 4-2-3 Example of History Edit Dialog Box

● Delete function

You can delete devices from the list on the History dialog box by the two methods shown below.

- Select the device, and click **Delete** at the bottom of the dialog box.
- Right click on the device to delete, and select **Delete** from the context menu.

When you perform the method above, the confirmation dialog box shown below asking you to confirm the deletion. Click **Yes** to delete the device from the History view.

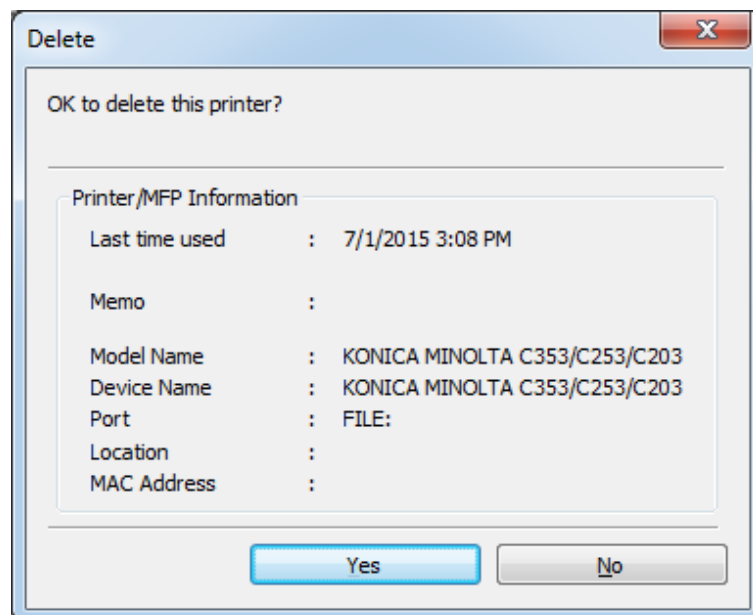


Figure 4-2-4 Example of History Delete Dialog Box

6. Select a device to output from the list of devices, and click **OK**.

Network Search

Use Network Search to search for devices on the network, and select one of the matching devices that are found. The procedure for using Network Search is as follows.

1. From the Windows Printers folder, right click on the "KONICA MINOLTA Universal PCL (PS / PCL5)" icon, and select Printer Properties.
2. The Printer Properties of KONICA MINOLTA Universal Printer Driver opens.
3. Move to Configure tab and push "Dynamic Mode..." button.
4. Select "Network Search" from the pull-down list at the top of the Device Selector dialog box.

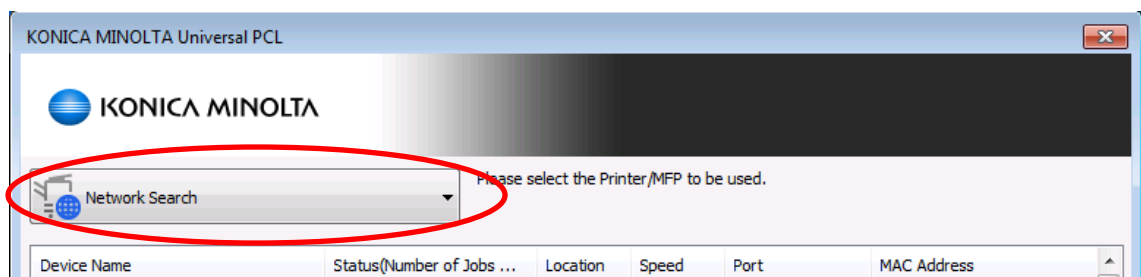


Figure 4-2-5 Network Search Selection

5. The Device Selector starts to search the network for devices.
Click **Cancel** at the bottom of the dialog box below to cancel the search.

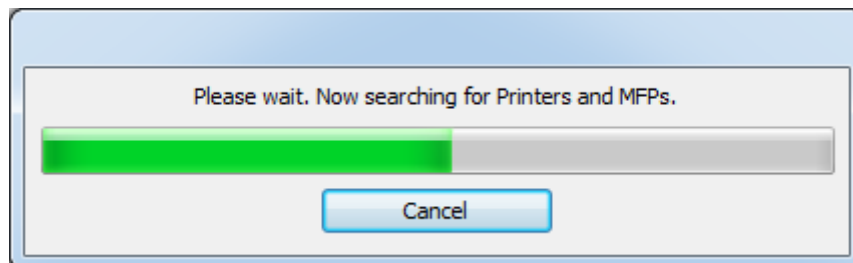


Figure 4-2-6 Searching Dialog Box

NOTE:

- Click **Refresh** at the bottom of the Device Selector dialog box to perform the search again.
 - Click **Search Settings** at the bottom of the Device Selector dialog box to open an advanced search settings dialog box. See **Search Settings**, below, for details.
-

6. A list of detected devices appears.

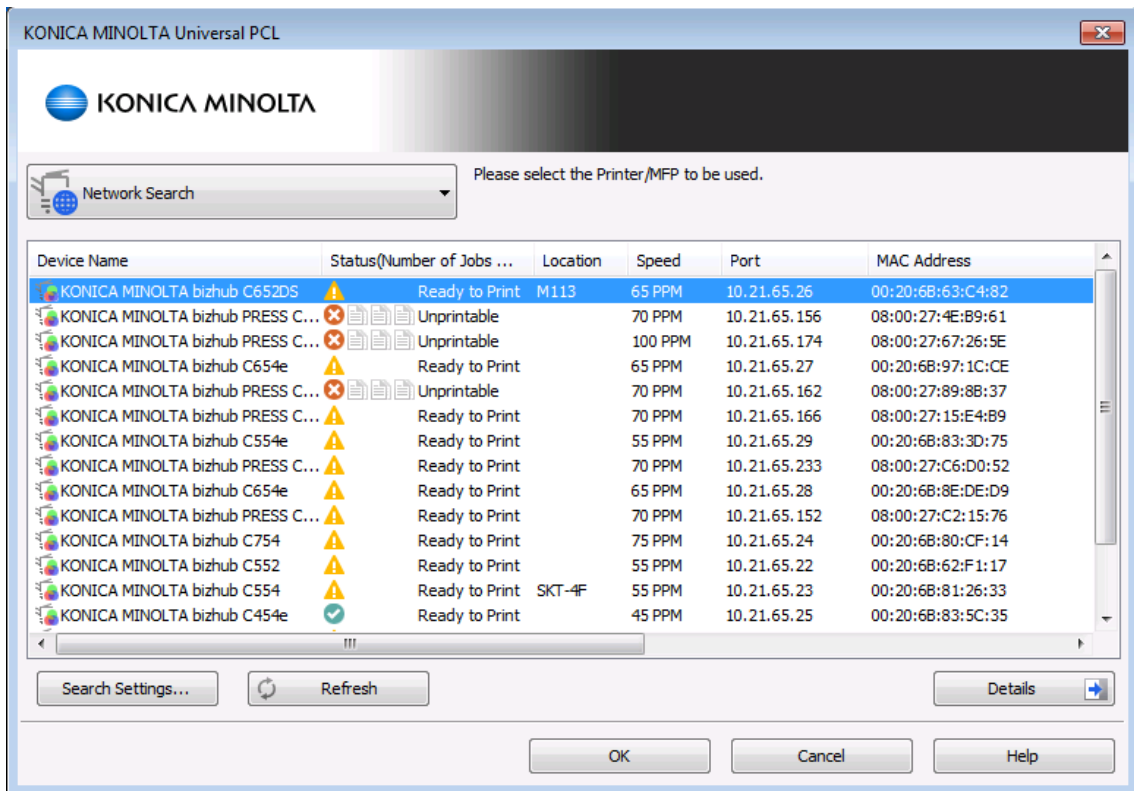


Figure 4-2-7 Network Search View

The following information is displayed for each device.

Column Name	Description
Device Name	This shows the printer-type icon and the name of the device. See Table 2-4-1 Printer Type Icons for information about the printer-type icons.
Status(Number of Jobs Waiting)	This shows the device status as an icon and text. See Status Icon Specification , below, for details.
Location	This shows the location where the device is installed. The location must be entered on the device beforehand.
Speed	This shows the maximum print speed of the device in PPM.
Port	This shows the IP address (IPv4 or IPv6).
MAC Address	This shows the MAC address of the device.
Model Name	This shows the model name of the device.
Color/Black and White	This shows whether the device is a color or B&W printer.
PS3 (Only for PS version) PCL6 (Only for PCL6 version) PCL5(Only for PCL5 version)	This shows whether the device supports target PDL. Devices that do not support target PDL cannot be used.

Table 4-2-2 Details about Devices in the Network Search View

7. Select a device from the list of detected devices, and click **OK**.

Filtering Devices

You can specify parameters to filter devices on the Network Search and History views. Click **Details** at the lower right of the dialog box to display the Advanced Search Settings area, and specify your filter parameters.

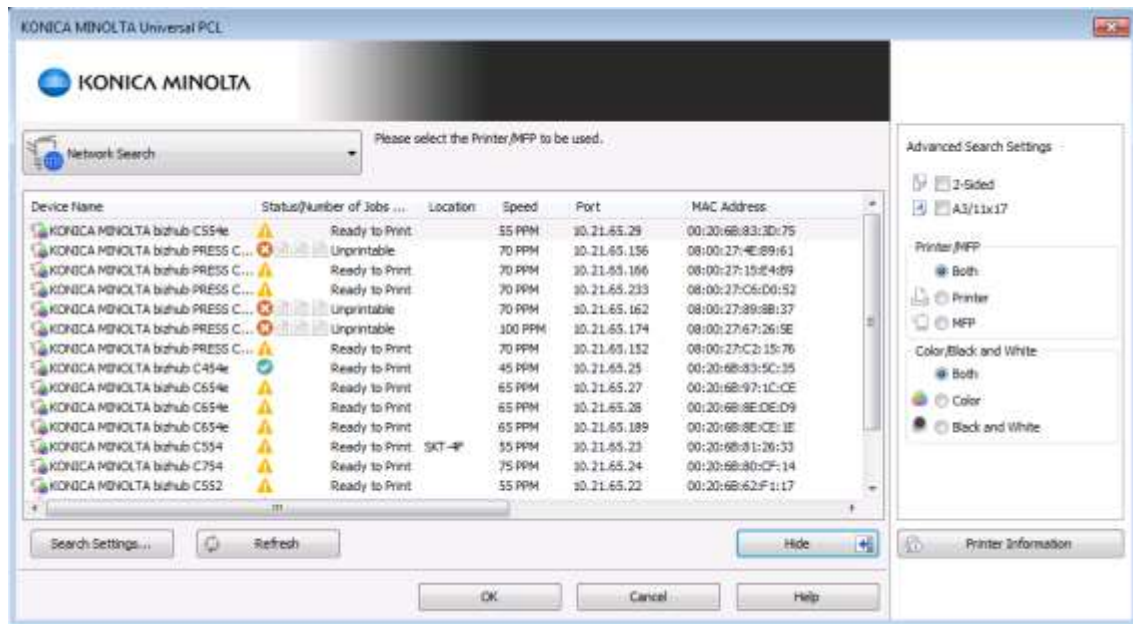


Figure 4-2-8 Example of Expanded View


Details of the filter parameters that you can specify are described below.

Parameter	Description
2-Sided	Select this checkbox to only show devices capable of two-sided printing.
A3/11x17	Select this checkbox to only show devices supporting A3 size and 11x17 inch paper. Note, however, that if this checkbox is selected, then devices will not be shown if they are unknown to support that size, or if they are third-party devices.
Printer/MFP	Select whether to display only printers, only MFP's, or both. Devices will be treated as printers if their type cannot be determined, or if they are third-party devices.
Color/Black and White	Specify whether to display only color printers, only B&W printers, or both.

Table 4-2-3 Details about Devices in the History View

Search Settings

When using "Network Search", you can set detailed search parameters in the "Search Settings" dialog box shown below.

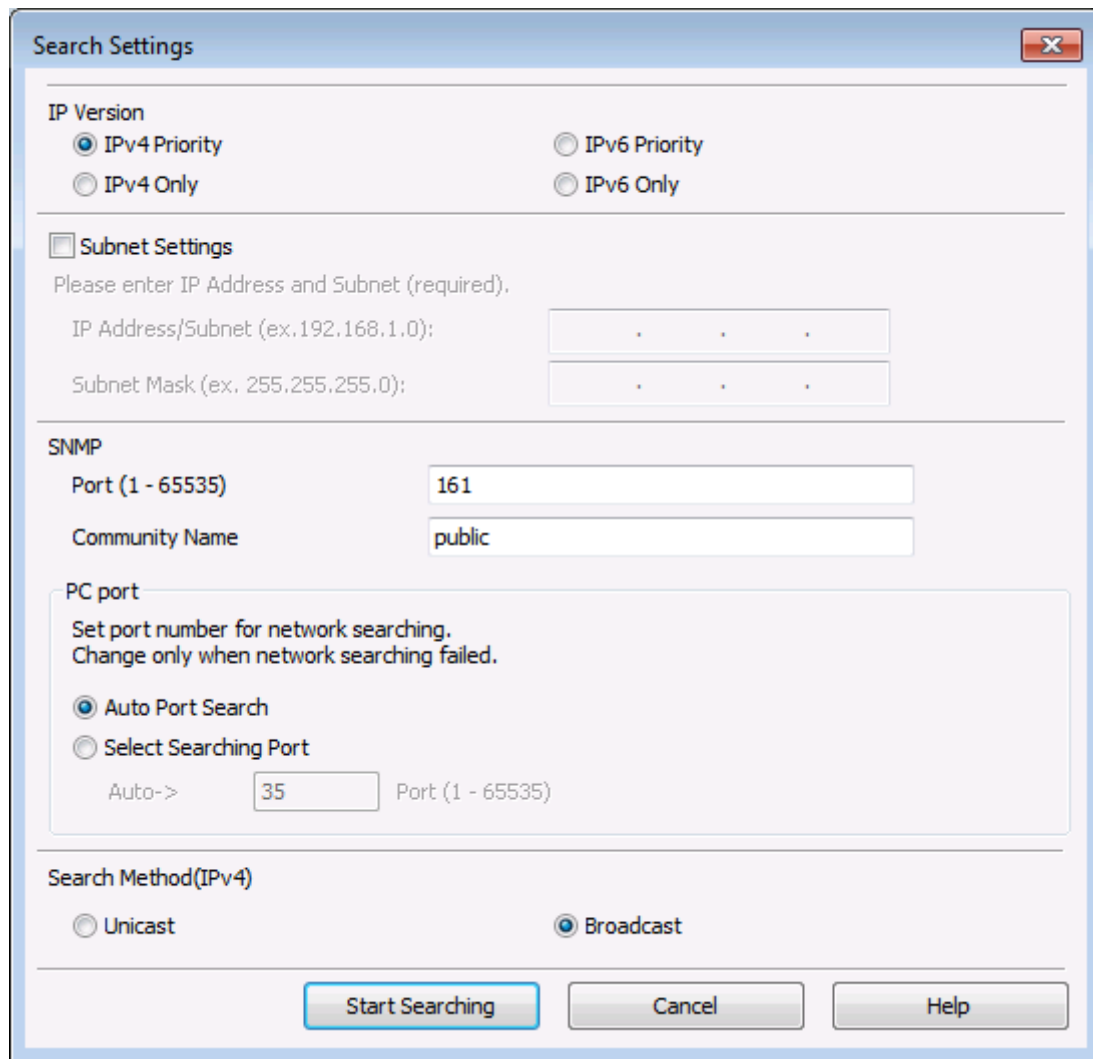

Search Settings

IP Version

☒ IPv4 Priority ☐ IPv6 Priority

☐ IPv4 Only ☐ IPv6 Only

☐ **Subnet Settings**

Please enter IP Address and Subnet (required).

IP Address/Subnet (ex. 192.168.1.0):

Subnet Mask (ex. 255.255.255.0):

SNMP

Port (1 - 65535)

Community Name

PC port

Set port number for network searching.
Change only when network searching failed.

☒ Auto Port Search

☐ Select Searching Port

Auto-> Port (1 - 65535)

Search Method(IPv4)

☐ Unicast ☒ Broadcast

Figure 4-2-9 Search Settings Dialog Box

The settings and their descriptions are described below.

Parameter	Description
IP Version	Specify the IP protocol version to give priority for searching.
IPv4 Priority	Give priority to IPv4. This is the default for Windows Vista/Server 2008 or later operating systems.
IPv6 Priority	Give priority to IPv6.
IPv4 Only	Only search for IPv4. "IPv4 Only" is the only choice available on Windows XP/Server 2003 (other choices will be grayed out).
IPv6 Only	Only search for IPv6.
Subnet Settings	Select this checkbox to set the subnet to search for. If this checkbox is cleared, then IP address and subnet mask are acquired for computers with UPD installed, and the search is performed on that computer's subnet. This cannot be set if "IPv6 Only" is selected.

IP Address/Subnet	Specify the IP address of the subnet to search.
Subnet Mask	Specify the subnet mask of the subnet to search.
SNMP	Specify the SNMP setting for searching.
Port (1-65535)	Enter the SNMP port number that is set on the device side. Default is 161.
Community Name	Enter the SNMP Community Name that is set on the device side. Default is "public".
PC Port	Specify the port number on the PC side that is used for network searching.
Auto Port Search	Port is automatically searched. This is default.
Select Searching Port	Enter the port number from 1 to 65535. Default is 35.
Search Method(IPv4)	Specify the IPv4 search method. This is grayed out if "IPv6 Only" is selected.
Unicast	Perform the search via unicast. This will make the search take longer, because the computer will communicate with devices on the network on a 1-to-1 basis. And also it may be possible to detect devices that were not detected using a broadcast.
Broadcast	Perform the search via broadcast. This reduces the search time, because it communicates with all the devices on the network at once.

Table 4-2-5 Detailed Items in Search Settings Dialog Box

NOTE: If you specify a subnet other than that of the PC/server on which UPD is installed under "Subnet Settings," then a Broadcast request may not be able to pass through the router, depending on the router's configuration. If this happens, you can perform the search by changing the "Search Method" to Unicast.

Status Icon Specification

In the Network Search and History views, the "Status (Number of Jobs Waiting)" column shows icons indicating the device status and the length of the job queue. Each details is described below.

- **Device Status Icon**

This icon indicates whether a warning or error has occurred on the device. To see details about a warning or error, use the **Printer Information** described below, or check the device directly.

Device Status	Icon	Description
Ready		The device has no warnings or errors, and is ready to print.
Warning		There is a warning on the device, such as low toner or paper. Print is possible.
Unavailable		The device is unable to print, due to a device

		error, running out of paper, etc.
Unknown		The device status could not be acquired.

Table 4-2-6 Device Status Icons

- **Job Queue Icon**

This icon indicates the number of standby jobs on the device's queue.

Congestion	Queued Jobs	Icon
High	10+	
Medium	2-9	
Low	1	
No Jobs in Queue	0	
Unknown	Unknown	

Table 4-2-7 Job Queue Icons

Note, however, that the queue level will always be displayed as "unknown" for third-party devices.

The number in parentheses in the text to the right of the icon shows the number of currently queued jobs. The status information of these devices is updated every 10 seconds.

Printer Information

You can open the KONICA MINOLTA PAGE SCOPE Web Connection from the Device Selector, and check the device status from a Web browser. The procedure for checking the Printer Information is as follows.

- Select a device from the Network Search or History view, and click **Printer Information**. (The **Printer Information** can be found in the expanded area that appears when you click **Details**.)
- From the History view, right click on the device whose information you want to check, and select **Printer Information** from the context menu.

If a third-party device has the similar function to the KONICA MINOLTA PAGE SCOPE Web Connection, then you can also check its information using Printer Information.

4.3 Changing the Display Language

User can change the display language from Printing Preferences.

Printing Preferences

1. Click “Language Setting...” button in “Other” tab (or “Job” tab) of Printing Preferences.

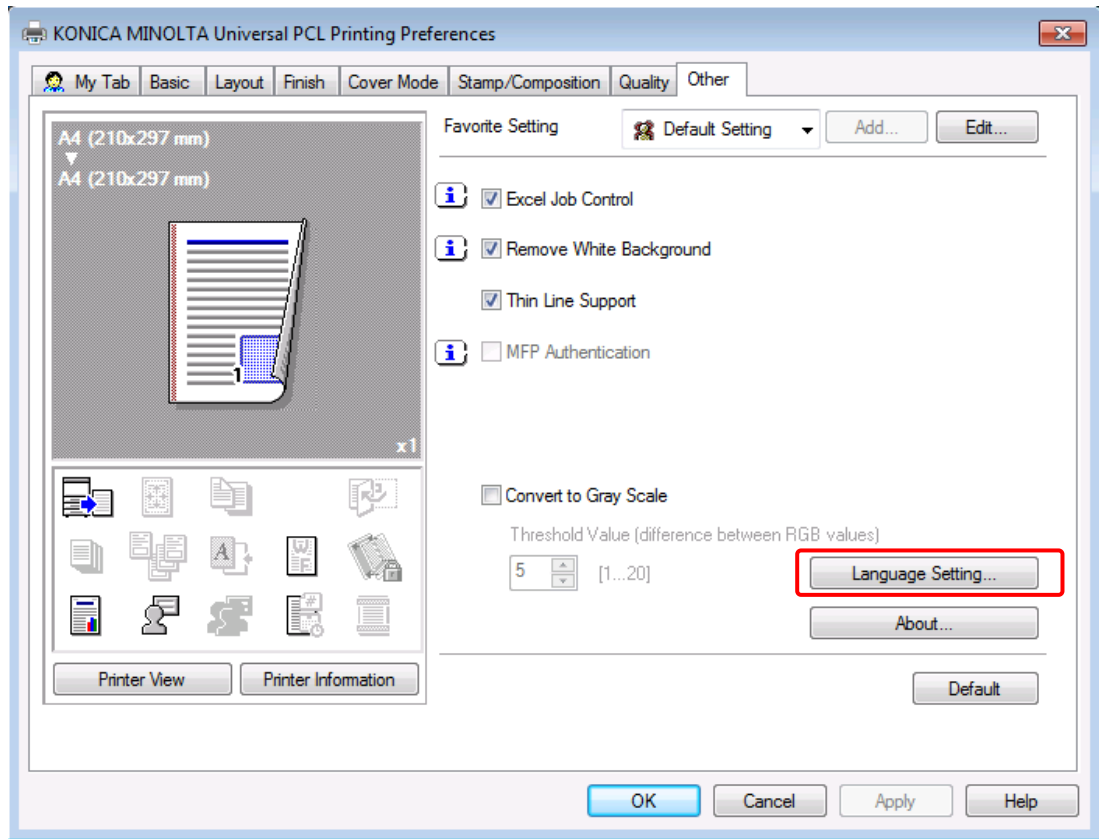


Figure 4-3-1 Printing Preferences screen

2. Select the display language from Language Setting dialog, and click OK.

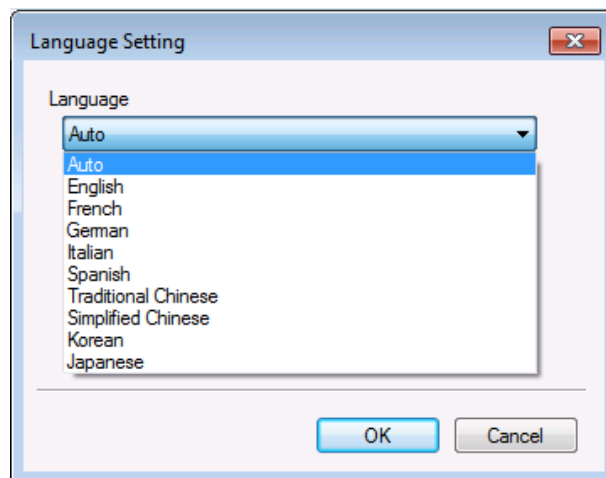


Figure 4-3-2 Language Setting screen

3. Click OK in Printing Preferences.
4. Display language is changed when the Printing Preferences is opened next time.

Preferred and Fallback languages

If display language of Windows is not available in Universal Print Driver, best appropriate language will be chosen according to following table:

Windows Display Language	Preferred Language	1st Fallback Language (When preferred language is not available)	2nd Fallback Language (When preferred or fallback are not available)
English	English	n/a	n/a
French	French	English	English
German	German	English	English
Italian	Italian	English	English
Spanish	Spanish	English	English
Dutch	Dutch	English	English
Portuguese	Portuguese	English	English
Danish	Danish	English	English
Finnish	Finnish	English	English
Norwegian	Norwegian	English	English
Swedish	Swedish	English	English
Greek	Greek	English	English
Turkish	Turkish	English	English
Czech	Czech	English	English
Hungarian	Hungarian	English	English
Polish	Polish	English	English
Romanian	Romanian	English	English
Slovakian	Slovakian	Czech	English
Slovenian	Slovenian	English	English
Russian	Russian	English	English
Catalan	Catalan	Spanish	English
Euskera	Euskera	Spanish	English
Ukrainian	n/a	Russian	English
Serbo Croatian	n/a	English	English
Belarusian	n/a	Russian	English
Bulgarian	n/a	English	English
Albanian	n/a	Italian	English
Georgian	n/a	English	English
Lithuanian	n/a	Russian	English
Galician	n/a	Spanish	English
Irish	n/a	English	English
Latvian	n/a	Russian	English
Macedonian	n/a	English	English
Estonian	n/a	English	English
Frisian	n/a	Dutch	English
Welsh	n/a	English	English
Ossetian	n/a	Russian	English
Maltese	n/a	English	English
Luxembourgish	n/a	French	English
Icelandic	n/a	English	English
Komi	n/a	Russian	English
Scottish Gaelic	n/a	English	English

Figure 4-3-1 Display Language, Preferred and Fallback languages

NOTE: If “Auto” is selected for display language, OS language is determined and optimum display language is selected automatically.

NOTE: Following functions are not supported by language switching:

- Media names in the 'Paper available' section in tab 'General' of the property window.
 - Media type names as displayed in the printer window of some applications that are started by PS driver.
-

-
- Switching the displayed language is not possible from within some applications, (e.g. Adobe)
-

4.4 UPD DriverAPI


DriverAPI is supported in KONICA MINOLTA Universal Print Driver.

DriverAPI provides I/F to make it possible to change the print settings directly from application made by customer without opening Driver UI. DriverAPI is already supported in KONICA MINOLTA Production Version Drivers.

4.5 PCL5

Printing with only black and white is possible in KONICA MINOLTA Universal Print Driver PCL5.


1. Open Printer Property dialog.
2. Click [Monochrome only] in [Device Settings] tab. Select [Enabled (PCL5e)]. Then the driver can be print only black and white.

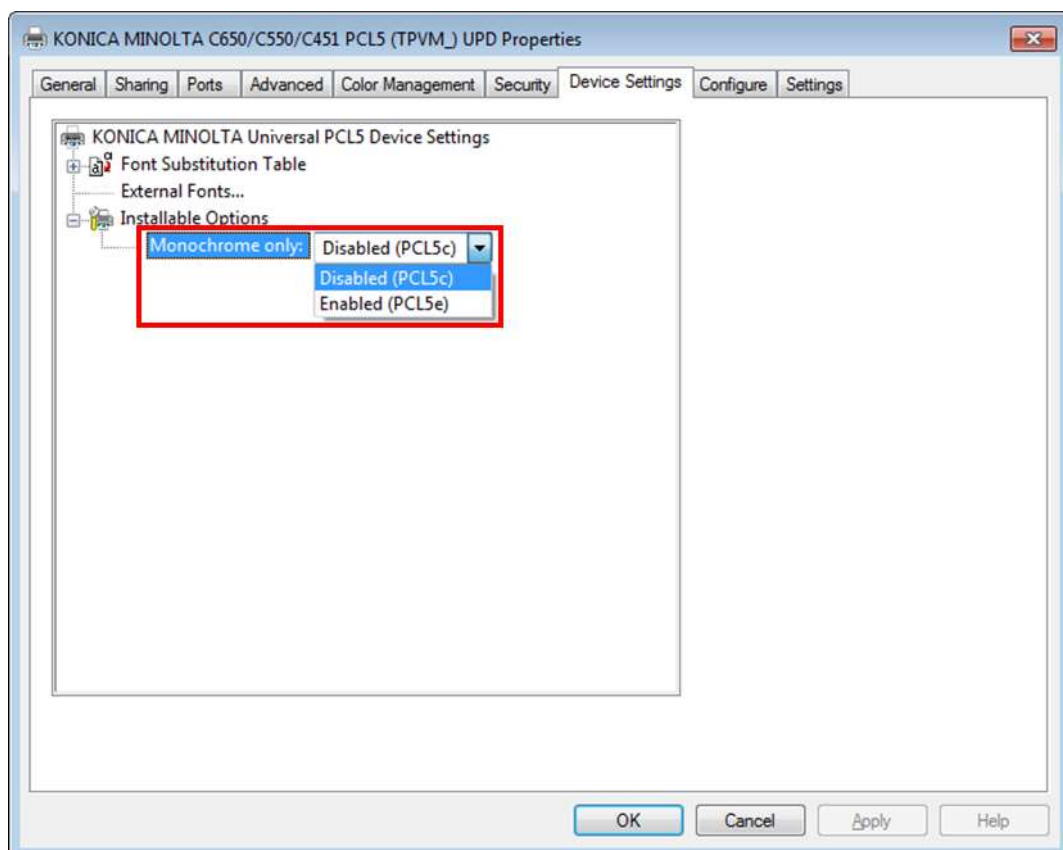

4-5-1 Select Monochrome only in PCL5

Disabled (PCL5c)


In Printing Preferences dialog, [Color] can be selected in [Quality] tab when Disabled (PCL5c) is selected.

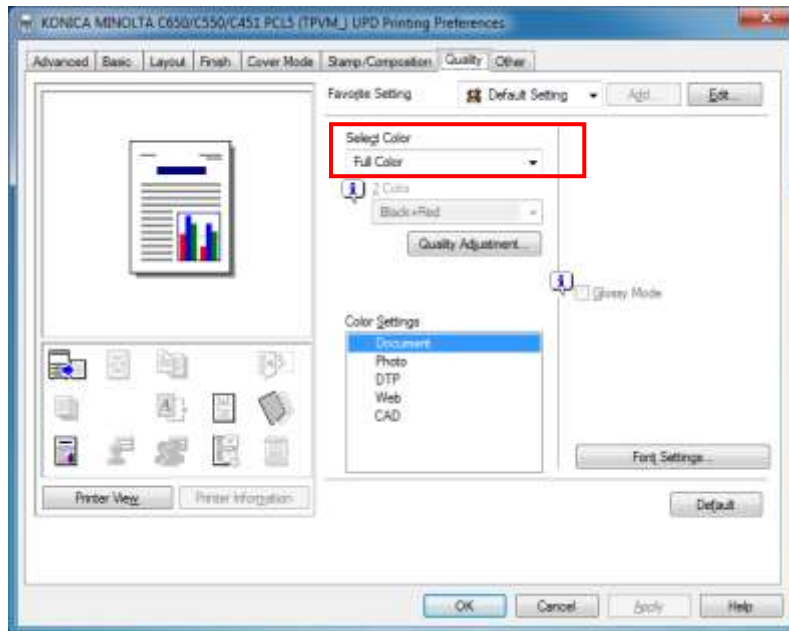

☒ 4-5-2 [Quality] tab (when Disabled(PCL5c) is selected)

Enabled (PCL5e)


In Printing Preferences dialog, [Color] cannot be selected in [Quality] tab when Enabled (PCL5e) is selected.

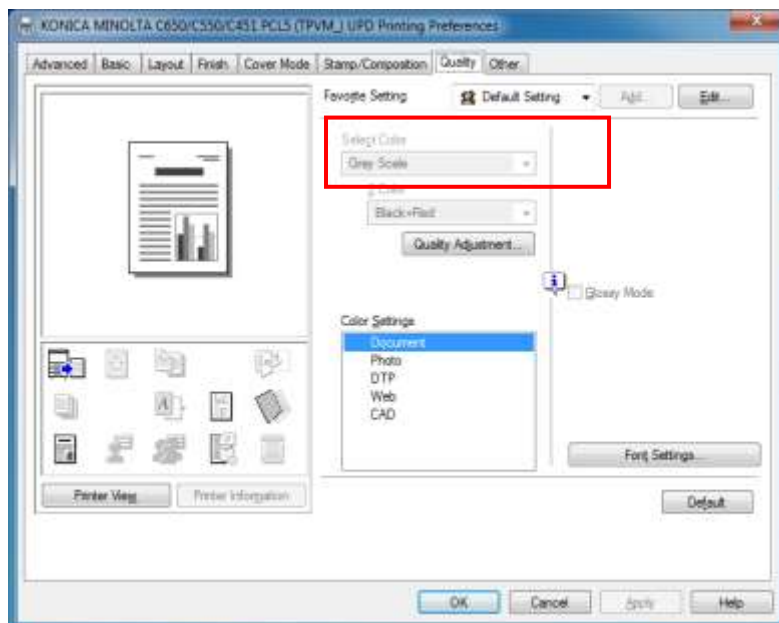

☒ 4-5-3 [Quality] tab (when Enabled(PCL5e)is selected)

Grayscale 1bit/8bit changing

Grayscale 1bit/8bit can be changed in [Advanced] tab of Printing Preference dialog.

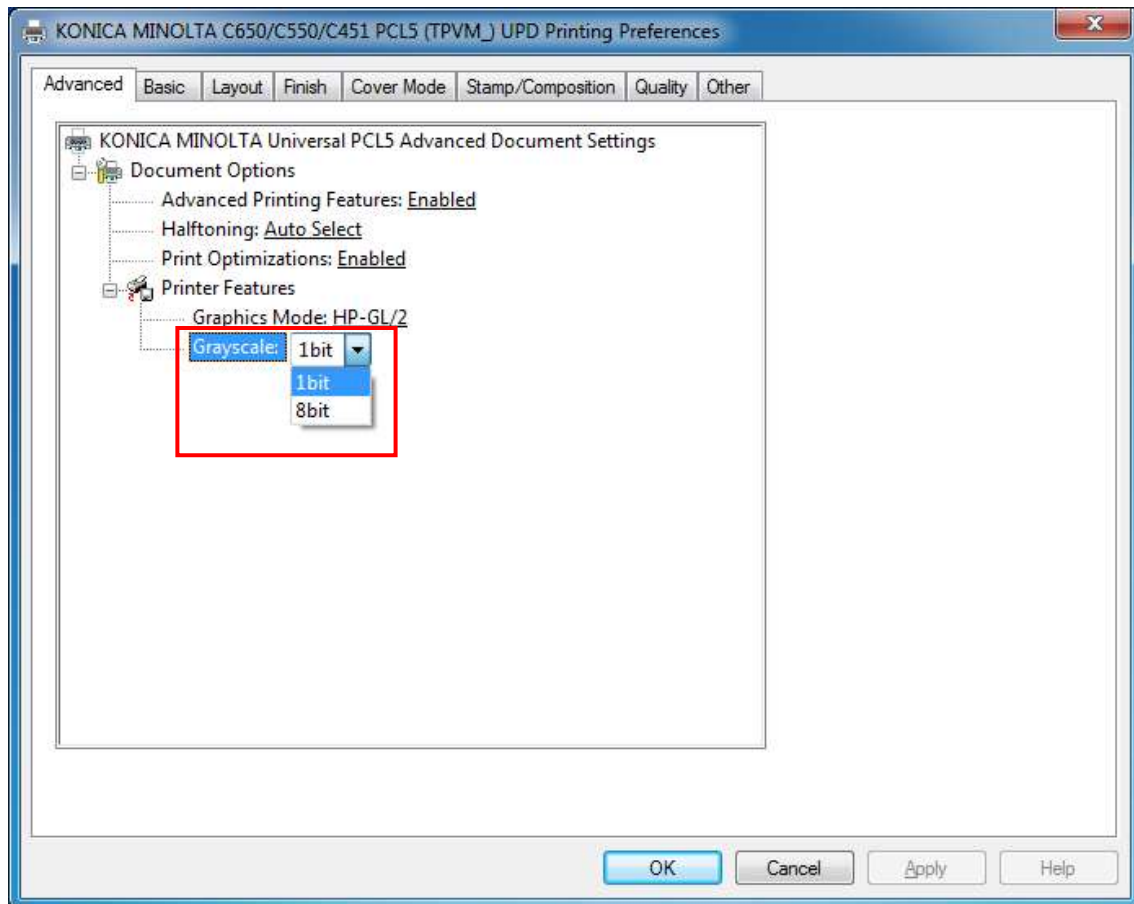

☒ 4-5-4 Printer Property dialog

NOTE: In PCL5 driver of color models, the default value is Disabled (PCL5).

NOTE: In PCL5 driver of monochrome models, the default value is Enabled (PCL5e).

Disabled(PCL5c) cannot be selected.

NOTE: Grayscale 1bit/8bit cannot be selected in following models and will be fixed in 1 bit.

- bizhub 195/215/235
 - bizhub 163/211
 - bizhub 20
 - bizhub 20P
-

4.6 Administrator Customization

KONICA MINOLTA Universal Print Driver supports the function that customize the print settings by administrator. Default value of print setting can be changed or fixed by

using this function.

Print setting of customization target

Feature	Value
Select Color	Auto Color
	Full Color
	Gray Scale
	2 Color
Print Type	1-Sided
	2-Sided
	Booklet
Output Method (MFP)	Print
	Secure Print
	Save in User Box
	Save in User Box/Print
	Proof Print
	ID&Print
Output Method (Printer)	Print
	Store Job
	Print and Hold
	Secured Job
	Proof then Print
	ID&Print
Related Item to Output Method	SecureID
	Secure Password
	Box File Name
	Box Number
	Password
	Hide Password
User Authentication / Account Track	User Type
	User Name
	Password (for User Authentication)
	Server Setting(1-20)
	MFP Authentication
	Department Name

	Password (Account Track)
	Enable Single Sign-On functionality for printing functions

Setting method

1. Open **Printer Property** view.
2. Select **Settings** tab, click **Administrator Customize**.

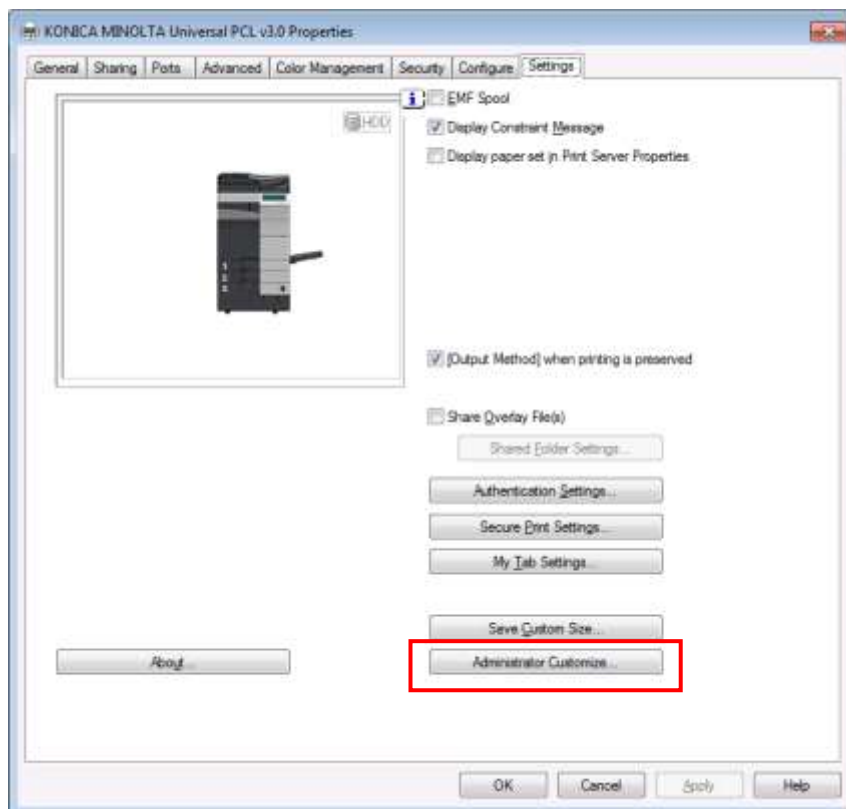


Figure 4-6-1 Setting tab of Printer Property

3. Setting dialog will be displayed. Select the method of customize print settings in the left column. Select **Select default setting** if you want to specify the default value, or select **Lock setting** if you want to fix the value.

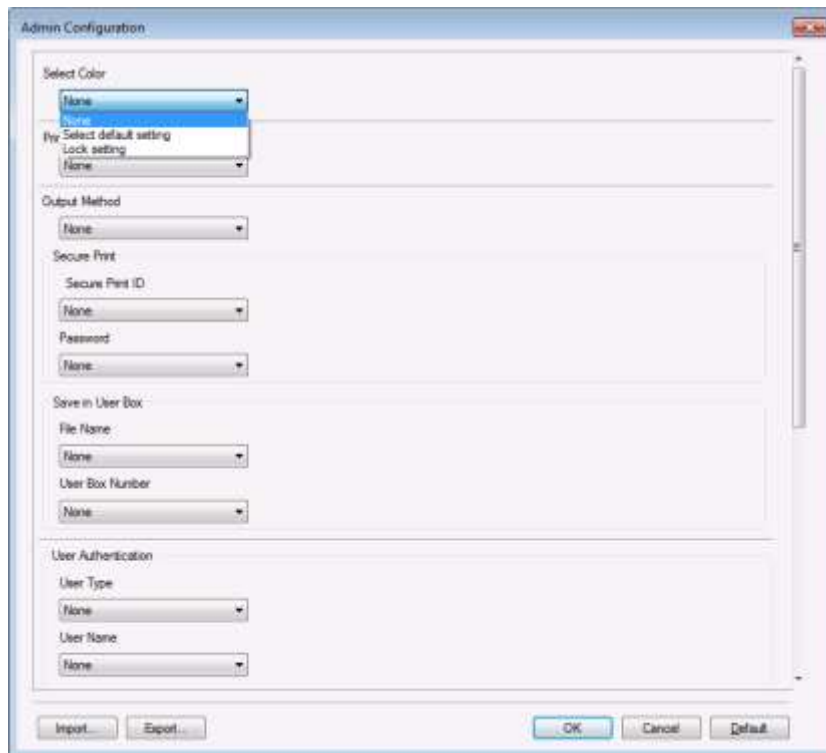


Figure 4-6-2 Administrator Customize Dialog Box - 1

- Next, select the value of the feature in the right column.

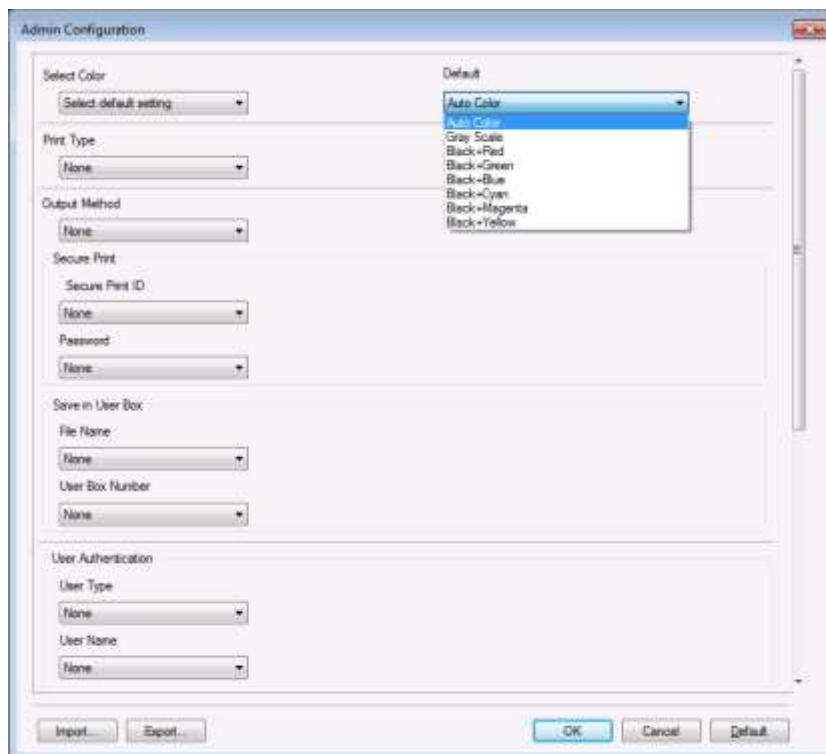


Figure 4-6-3 Administrator Customize Dialog Box - 2

5. In the example below, Gray Scale has been selected to the default value of Color setting.

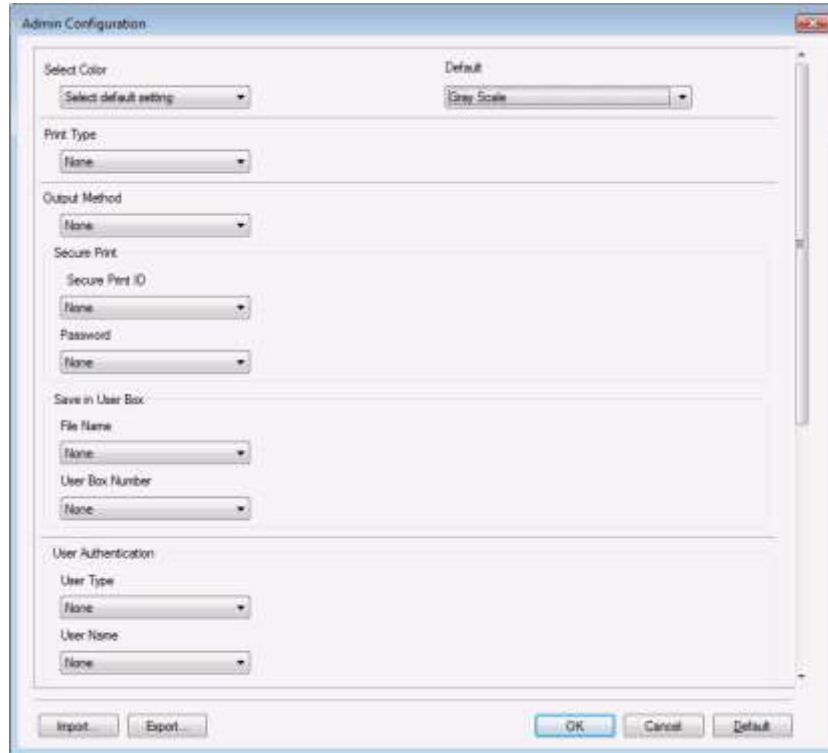


Figure 4-6-4 Adiministrator Customize Dialog Box - 3

Export and import the settings of Administrator Customization

It is possible to export the settings of Administrator Customization to file (.KAC file) and import to another Print Queue.

Method of export

1. Click Export.

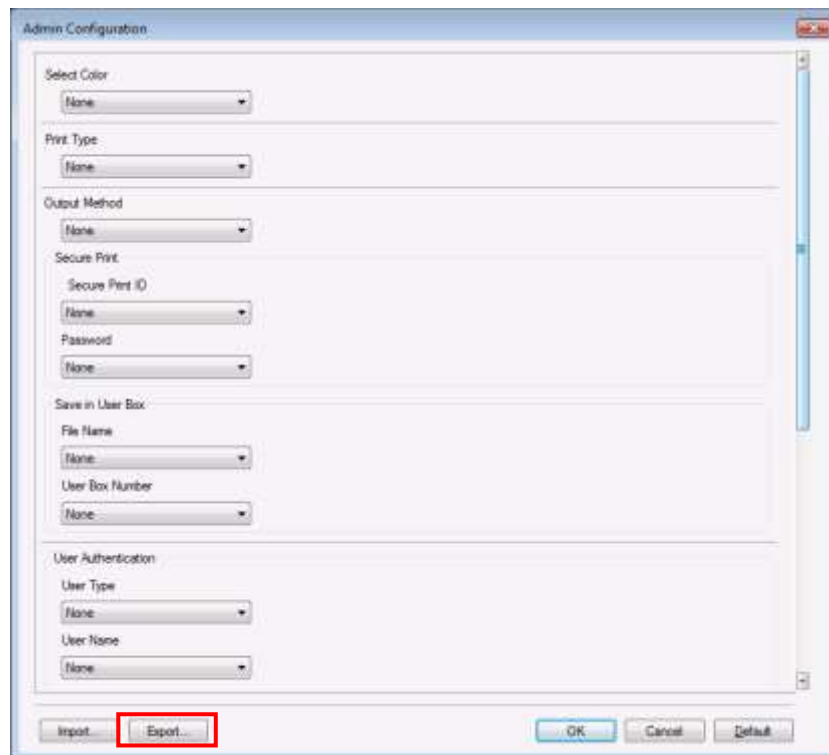


Figure 4-6-5 Export Selection

2. Specify location and file name, and then click **Save**.

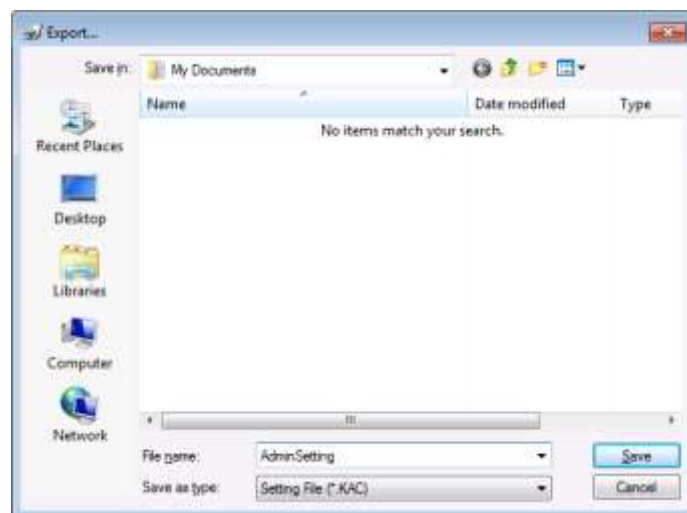


Figure 4-6-6 Export Destination Selection

Method of import

1. Click **import**.

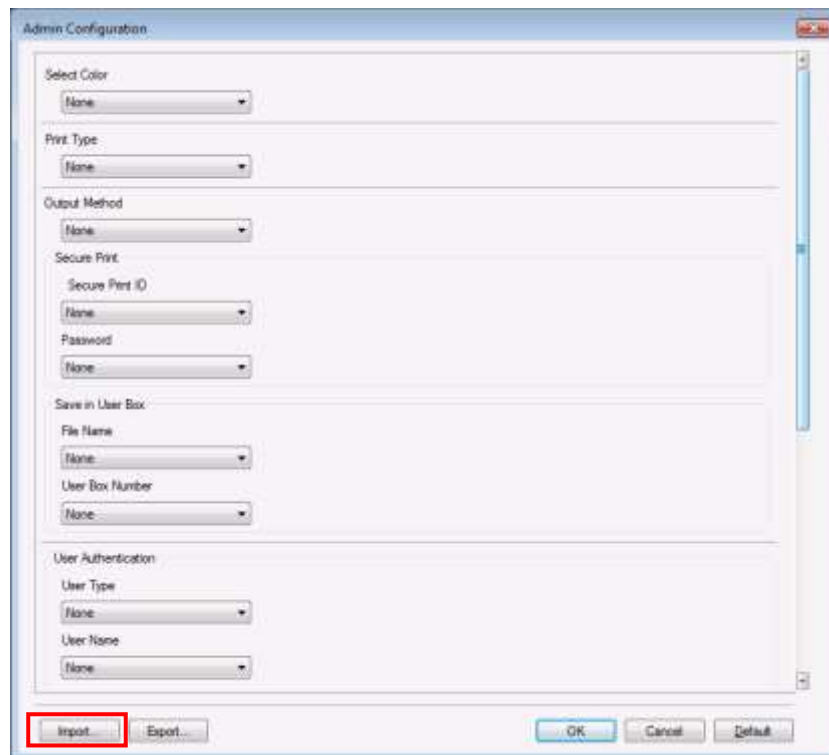


Figure 4-6-7 Import Selection

2. Select the .KAC to import and then click **Open**.



Figure 4-6-8 Import Destination Selection

4.7 Using InstCfg.ini

This section describes how to add the printer icon using InstCfg.ini. You can determine the model, SNMP setting and Administrator Customization setting with InstCfg.ini

Creating a Printer Icon

You can use InstCfg.ini when you create a printer icon by “Add Printer” wizard or command such as “PrintUI.dll”. If an InstCfg.ini file is prepared, the operation will be determined in accordance with the InstCfg.ini file.

File path of InstCfg.ini file

C:\ProgramData\KONICA MINOLTA\UPD\InstCFG.ini

Format of InstCfg.ini file

InstCfg.ini is a text file and encode is UTF-8. File format is based on ini file of Windows, but only [Install] section is CSV.

```
[Install]
PrintQueueName, ModelName, SNMPSetting, CustomizeSetting

[SNMP]
SNMPKey = PortNumber, UseVersion, CommunityName, DiscoveryName, ReadUserName,
ContextName,      SecurityLevel,      AuthenticationProtocol,      AuthenticationPassword,
PrivacyProtocol, PrivacyPassword

[Customize]
CustomizeKey = CustomizeSettingCollection

[Strings]
StringKey = StringValue
```

Contents in InstCfg.ini file.

NOTE: Each value must be enclosed with double quotes.

Section	Key	Value	Description	Necessary
Install			To describ the printer icon name to be processed and its settings.	Yes
		PrintQueueName	To specify the printer icon name.	Yes
		ModelName	To specify the model name. The model name can be specify by models display in Printer propertys > Configure > Select Model view.	Yes
		SNMPSetting	To specify a preset of SNMP settings. To specify the SNMPKey name in SNMP section.	No
		CustomizeSetting	To specify a preset of Admin Customization. To specify the CustomizeKey name in Customize section.	No
SNMP			To define the preset settings related to SNMP.	No
	SNMPKey		To define the Key name of each SNMP setting preset. Key name is arbitrary. Can not use white space in Key name.	No
		PortNumber	Specify the UPD port number of device.	Yes(*1)
		UseVersion	Specify SNMP version 1 : SNMPv1/v2 3 : SNMPv3	Yes(*1)
		CommunityName	Specify Ccommunity name of SNMPv1/v2. It is valid when UseVersion is "1".	No

	Default valude is“public”.	
DiscoveryName	Specify SNMPv3 Ddscovery name of SNMPv3. It is valid when UseVersion is “3”. Default valude is“public”.	No
ReadUserName	Specify user name of SNMPv3. It is valid when UseVersion is “3”. Default valude is“initial”.	No
ContextName	It is valid when UseVersion is “3”. Default valude is“”.	No
SecurityLevel	Specify security level of SNMPv3. noAuthNoPriv : Not authentice. (No authentication, no encryption) authNoPriv : auth-password (With authentication, no encryption) authPriv : auth-password/priv-password (With authentication, with encryption) It is valid when UseVersion is “3”.	Yes(*2)
AuthenticationProtocol	Specify authentication protocol of SNMPv3 (SecurityLevel is valid only when authNoPriv/authPriv) MD5 SHA It is valid when UseVersion is “3”.	No

			Default valude is“MD5”.	
		AuthenticationPassword	Specify password fo SNMPv3 authentication. (SecurityLevel is valid only when authNoPriv/authPriv) It is valid when UseVersion is “3”. Default valude is“”.	No
		PrivacyProtocol	Specify encryption protocol of SNMPv3. (SecurityLevel is valid only when authNoPriv/authPriv) AES DES It is valid when UseVersion is “3”. Default valude is“DES”.	No
		PrivacyPassword	Specify password for SNMPv3 encryption. (SecurityLevel is valid only when authNoPriv/authPriv) It is valid when UseVersion is “3”. Default valude is“”.	No
Customize			To specify a preset of Admin Customization.	No
	CustomizeKey		To define the Key name of each Customize setting preset. Key name is arbitrary. Can not use white space in Key name. Specify settings of administrator customize separated by commas	No

			in Key name. It can be specified more than one.	
		CustomizeSettingCollection	Specify settings of administrator customize separated by commas as below. It can be specified more than one. Only describe features that want to customize. Feature:Value.Action ※The value can be specified in Feature, Value, Action will be described in other list. ※Example Customize="SelectColor:Greyscale.Fix, DoubleSides:Simplex.Default"	No
	Strings		In this section, defines a string to be used in the Administrator Customization preset.	No
		StringKey	To define the Key name of each String. Key name is arbitrary. Can not use white space in Key name.	No
		StringValue	To specify the string to be used in the value of Administrator Customization. The value is need to be enclosed in double quotes. Use only one set when you use double quotes in value.	No

*1 : Necessary when use SNMPKey setting.

*2 : Necessary when UseVersion is "3".

• Table of value for CustomizeSettingCollection

This table describes the value that can be defined in CustomizeSettingCollection which in Customize section of InstCfg.ini.

“Fix” or “Default” can be defined in each action of value. “Fix” is means fix the value. “Default” is means set the value as default.

Feature	Value	CustomizeSettingCollection		Comment
		Feature	Value	
Select Color		SelectColor		
	Full Color		FullColor	
	Auto Color		AutoColor	
	Gray Scale		Grayscale	
	Black+Red		2Color_BlackRed	
	Black+Green		2Color_BlackGreen	
	Black+Blue		2Color_BlackBlue	
	Black+Cyan		2Color_BlackCyan	
	Black+Magenta		2Color_BlackMagenta	
	Black+Yellow		2Color_BlackYellow	
	Black+Chinese Red		2Color_BlackChineseRed	
Print Type		DoubleSides		
	1-Sided		Simplex	
	2-Sided		Duplex	
	Booklet		Booklet	Printer,MFP 共用
Output				

Method	Output Method	OutputMethod	OutputMethod(MFP), JobRetention(Printer)
	Print	NormalPrint	NormalPrint(MFP), NoStore(Printer)
	Secure Print	SecurePrint	SecurePrint(MFP), SecuredJob(Printer)
	Save in User Box	SaveBox	
	Save in User Box/Print	SaveBoxAndPrint	
	Proof Print	ProofPrint	ProofAndPrint(MFP), ProofPrint(Printer)
	ID&Print	TouchAndPrint	
	Store Job	StoreJob	Printer
	Print and Hold	PrintHold	Printer
Secure Print (MFP) - Secure ID	Any value	SecureID	SecurePrint(MFP)
		※ Specify StringKey	
Secure Print (MFP) - Secure passworf	Any value	SecurePassword	SecurePrint(MFP)
		※ Specify StringKey	
Save in User Box - File Name	Any value	BoxFileName	
		※ Specify StringKey	

	Save in User Box		BoxNumber		
	- User Box Number	Any value		※ Specify StringKey	
	Secure Print (Printer)		Password		SecureJob(Printer)
	- Password	Any value		※ Specify StringKey	
	Secure Print (Printer)		HidePassword		SecureJob(Printer)
	- Hide password	Off		Off	
		On		On	
	User Authentication				
	User Type		AuthUserType		
		Public User		PublicUser	
		Recipient User		RecipientUser	
	User Name		RecipientUserName		
		WindowsLoginID		WinLoginUser	
		Any value		※ Specify StringKey	
	Password		RecipientPassword		
		Any value		※ Specify StringKey	
	Server Setting		ServerSetting		
		Server1		Server01	
		Server2		Server02	
		Server3		Server03	
		Server4		Server04	

		Server5		Server05			
		Server6		Server06			
		Server7		Server07			
		Server8		Server08			
		Server9		Server09			
		Server10		Server10			
		Server11		Server11			
		Server12		Server12			
		Server13		Server13			
		Server14		Server14			
		Server15		Server15			
		Server16		Server16			
		Server17		Server17			
		Server18		Server18			
		Server19		Server19			
		Server20		Server20			
		MFP Authentication			AuthEngine		
					Off		
					On		
		Account Track					
		Department		DepartmentName			
Name		Any value	※ Specify StringKey				

	Password		DepartmentPassword		
		Any value		※ Specify StringKey	
Enable Single Sign-On functionality for printing functions			SingleSignOn		
				Off	
				On	

5. Frequently Asked Questions

5.1 Is the Microsoft Cluster Service (MSCS) supported?

Yes. KONICA MINOLTA Universal Print Driver supports the following OS MSCS.

- Windows Server 2008 Enterprise (x86/x64)
- Windows Server 2008 R2 Enterprise
- Windows Server 2012
- Windows Server 2012 R2

5.2 Is the Citrix Environment Supported?

Yes. KONICA MINOLTA Universal Printer Driver supports the following environments.

- Citrix XenApp 6.5
- Citrix XenApp 7.5
- Citrix XenApp 7.6
- Citrix XenApp 7.7

5.3 Are TS Easy Print and RD Easy Print supported?

In KONICA MINOLTA Universal Print Driver, the "KONICA MINOLTA Universal PCL/PCL5" supports TS Easy Print and RD Easy Print.

5.4 How to Find the Supported or Non Supported Products by UPD?

The devices in the UPD device list with the "PDL Support - Yes -" icon shown in [Table 2-4-1 Printer Type Icons](#) of section 2.4 in the leftmost column support PDL. Those with the "PDL Support - No -" icon do not support it.

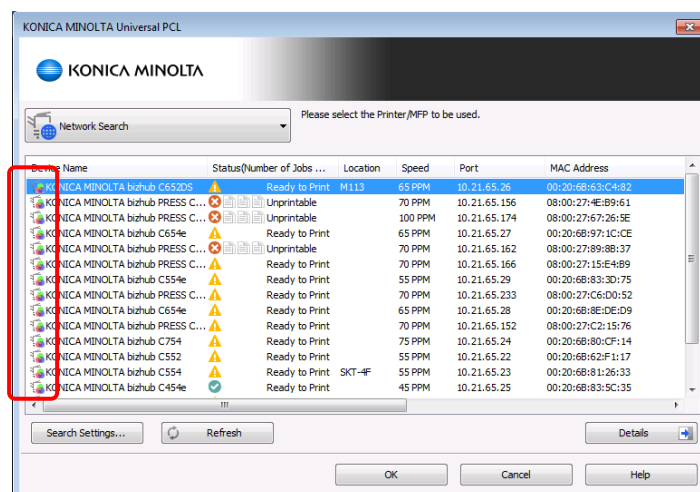


Figure 5-4-1 Example of Printer Type Icon Page View

5.5 Can I Use MyTab Function?

If MyTab is available from the individual driver for that Konica Minolta device, then it is also available from UPD.

5.6 Can All Users Utilize UPD without Restrictions?

No, they cannot. The user without port-creation privileges (e.g. having "User" privileges) can not use Device Selector.

In this case as well, you can still print to connections that have been pre-configured by an administrator.

5.7 Is the Windows 7 Device Stage supported?

No, support is not available. If you access the KONICA MINOLTA Universal Print Driver icon from the Devices and Printers window of Windows 7, the spooler window will open instead of the Device Stage window.

5.8 Is Printer Driver Isolation supported?

Yes. When Universal Print Driver PCL (PS) Version 2.0.2.0 or later is installed, it operates in **shared mode**.

6. Appendix

6.1 Function list of PCL5

MFP(IT4 later)

Function											A3 common										
											4752/4052										
											WPH										
											C759/C659										
											658e/658e/458e/458e/458e										
											C3851/ C3351/ C3851FS										
											C266/ C226										
											368/308										
											558/458										
											C658/ C558/ C458										
											958/808/758										
										C287/C227											
										C368/C308/C258											
										367/287/227											
										C281/C221/C221s											
										C554(e)/C454(e)/C364(e)/C284(e)/C224(e)											
										754(e)/654(e)											
										554e/454e/364e/284e/224e											
										C754(e)/C654(e)											
Document Property																					
AdvancedTab																					
Document Options										Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
PostScript Options										No	No	No	No	No	No	No	No	No	No	No	No
PostScript Output Option										No	No	No	No	No	No	No	No	No	No	No	No
Send PostScript Error Handler										No	No	No	No	No	No	No	No	No	No	No	No
Mirrored Output										No	No	No	No	No	No	No	No	No	No	No	No
Advanced Printing Features										No	No	No	No	No	No	No	No	No	No	No	No
PostScript Pass through										No	No	No	No	No	No	No	No	No	No	No	No
Halftoning										Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Print Optimizations										Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Printer Features										Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Graphics Mode										Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Grayscale										Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Function																			
	A3 common																		
	4752/4052																		
	WPH																		
	C759/C659																		
	658e/658e/458e/458e/458e																		
	C3851/ C3351/ C3851FS																		
	C266/ C226																		
	368/308																		
	558/458																		
	C658/ C558/ C458																		
	958/808/758																		
	C287/C227																		
	C368/C308/C258																		
	367/287/227																		
	C281/C221/C221s																		
	C554(e)/C454(e)/C364(e)/C284(e)/C224(e)																		
	754(e)/654(e)																		
	554e/454e/364e/284e/224e																		
	C754(e)/C654(e)																		
BasicTab																			
Original Orientation	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Original Size	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Paper Size	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Zoom	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Paper Tray	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Paper Type	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Output Method	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Copies	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Collate	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Offset	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Paper Setteing for Each Tray	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Authentication / Account Track	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Function				C754(e)/C654(e)	554e/454e/364e/284e/224e	754(e)/654(e)	C554(e)/C454(e)/C364(e)/C284(e)/C224(e)	C281/C221/C221s	367/287/227	C368/C308/C258	C287/C227	958/808/758	C658/ C558/ C458	558/458	368/308	C266/ C226	C3851/ C3351/ C3851FS	658e/658e/458e/458e/458e	C759/C659	WPH	4752/4052	A3 common		
Layout Tab																								
	Combination	Yes			Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
Enable			Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes			
Combination Details(N-up)			Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes			
			Combination		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		
			Layout Order		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		
			Border		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		
Combination Details(poster)			Yes		Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No			
			Combination		Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No		
			Overlap width line		Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No		
Combination(No Reduction)			No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No		
Rotate 180			Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		
180 Degree Rotation Setting...			No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No		
Skip Blank Pages			No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No		
Chapters			Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		
Print Position Settings			No	No	No	No	No	Yes	Yes	No	No	No	No	No	No	No	No	No	No	No	No	No		
Print Type			Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		
			Selection			Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
			1-Side/2-Side		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
			booklet		Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
Binding Position			Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		

		Binding Margin	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
			Enable	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
			Front Side	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
			Back Side	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Image Shift		Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
			Enable	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
			Front Side	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
			Back Side	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Function	A3 common		Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	4752/4052		Yes	No	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	
	WPH		Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	
	C759/C659		Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	
	658e/658e/458e/458e/458e		Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	
	C3851/ C3351/ C3851FS		Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	
	C266/ C226		Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	
	368/308		Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	
	558/458		Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	
	C658/ C558/ C458		Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	
	958/808/758		Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	
	C287/C227		Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	
	C368/C308/C258		Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	
	367/287/227		Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	
C281/C221/C221s		Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes		
C554(e)/C454(e)/C364(e)/C284(e)/C224(e)		Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes		
754(e)/654(e)		Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes		
554e/454e/364e/284e/224e		Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes		
C754(e)/C654(e)		Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes		
Finish Tab	Staple	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	Center Staple and Fold	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	
	Punch	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	
	Fold	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	
	Center Erase	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	
	Output Order	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	
	Output Tray	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	
	Paper Arrangement	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	
	Cover Mode Tab	Front Cover	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Back Cover	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Per Page Setting	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

		Transparency Interleave	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		PI Front Cover	Yes	Yes	Yes	Yes	No	No	No	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No
		PI Back Cover	Yes	Yes	Yes	Yes	No	No	No	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No
	Stamp/Composition Tab																				
		Watermark	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Create Overlay File	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Print in Overlay	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Copy Protect	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
		Data/Time	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
		Page Number	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
		Header/Footer	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
		Distribution Number Stamping	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No

Function		C754(e)/C654(e)																			
		554e/454e/364e/284e/224e																			
		754(e)/654(e)																			
		C554(e)/C454(e)/C364(e)/C284(e)/C224(e)																			
		C281/C221/C221s																			
		367/287/227																			
		C368/C308/C258																			
		C287/C227																			
		958/808/758																			
		C658/ C558/ C458																			
Quality Tab		558/458																			
		368/308																			
		C266/ C226																			
		C3851/ C3351/ C3851FS																			
		658e/658e/458e/458e/458e																			
		C759/C659																			
		WPH																			
		4752/4052																			
		A3 common																			

		Glossy Mode	Yes	No	No	Yes	No	No	Yes	Yes	No	Yes	No	No	Yes	Yes	No	Yes	Yes	No	No
		Toner Save	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
		Edge Enhancement	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
		Font Setting	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Smoothing	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Draft Print	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
	Other tab																				
		Excel Job Control	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Remove White Background	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Thin Line Support	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Language Setting	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Function		C754(e)/C654(e)	554e/454e/364e/284e/224e	754(e)/654(e)	C554(e)/C454(e)/C364(e)/C284(e)/C224(e)	C281/C221/C221s	367/287/227	C368/C308/C258	C287/C227	958/808/758	C658/ C558/ C458	558/458	368/308	C266/ C226	C3851/ C3351/ C3851FS	658e/658e/458e/458e/458e	C759/C659	WPH	4752/4052	A3 common
Device Property																				
Device Setting tab																				
		Font Substituion Table	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Available PostScript Memory	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Output Protocol	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Send CTRL-D Before Each Job	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Send CTRL-D After Each Job	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Convert Gray Text to PostScript Gray	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Convert Gray Graphics to PostScript Gray	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Add Euro Currency Symbol to PostScript Fonts	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No

		Job Timeout		No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Wait Timeout		No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Minimum Font Size to Download as Outline		No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Maximum Font Size to Download as Bitmap		No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		External Fonts		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Installable Options		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
			MoNochrome Only	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Configure tab																			
		Device Option		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
			Setting	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
		Paper Tray Information		Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
			Paper Tray Settings	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Obtain Device Information		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
		Obtain Settings		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
			SNMP Settings	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
		Encrypt Passphrase		Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
		Software Tools		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Function			C754(e)/C654(e)	554e/454e/364e/284e/224e	754(e)/654(e)	C554(e)/C454(e)/C364(e)/C284(e)/C224(e)	C281/C221/C221s	367/287/227	C368/C308/C258	C287/C227	958/808/758	C658/ C558/ C458	558/458	368/308	C266/ C226	C3851/ C3351/ C3851FS	658e/658e/458e/458e/458e	C759/C659	WPH	4752/4052	A3 common
	Setting tab																				
	EMF Spool		No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	
	Display Constraint Message		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	Display paper set in Print Server Properties		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	Verify Authentication settings before printing		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	

		Popup Authentication Dialog when printing	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
		Optimize CAD data Printing	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Fix Secure Print	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Enter ID/PWD to execute secure print	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
		Save Custom Size	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Model Setting	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

MFP(IT4 earlier)

Function	mc8650																
	362/282/222																
	501/421/361																
	751/601(1.0.2/3.UPD_03)																
	751/601(2.0.0.UPD_03)																
	423/363/283/223																
	652/602/552/502																
	C360/C280/C220																
	C652(DS)/C552(DS)/C452																
	350/250/200																
	C353/C253/C203																
	C650/C550/C451																
Document Property																	
	AdvancedTab																
		Document Options				Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		
		PostScript Options				No	No	No	No	No	No	No	No	No	No		
						PostScript Output Option				No	No	No	No	No	No	No	No
						Send PostScript Error Handler				No	No	No	No	No	No	No	No
						Mirrored Output				No	No	No	No	No	No	No	No
		Advanced Printing Features				No	No	No	No	No	No	No	No	No			
		PostScript Pass through				No	No	No	No	No	No	No	No	No			
		Halftoning				Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes			
		Print Optimizations				Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes			
		Printer Features				Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes			
						Graphics Mode	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		
						Grayscale	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		

Function														mc8650
362/282/222														
501/421/361														
751/601(1.0.2/3.UPD_03)														
751/601(2.0.0.UPD_03)														
423/363/283/223														
652/602/552/502														
C360/C280/C220														
C652(DS)/C552(DS)/C452														
350/250/200														
C353/C253/C203														
C650/C550/C451														
	BasicTab													
	Original Orientation				Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Original Size				Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

		Paper Size	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Zoom	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Paper Tray	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Paper Type	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Output Method	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
		Copies	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Collate	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Offset	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Paper Setteing for Each Tray	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Authentication / Account Track	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No

Function			C650/C550/C451	C353/C253/C203	350/250/200	C652(DS)/C552(DS)/C452	C360/C280/C220	652/602/552/502	423/363/283/223	751/601(2.0.0.UPD_03)	751/601(1.0.2/3.UPD_03)	501/421/361	362/282/222	m68650
Layout Tab	Combination		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Enable		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Combination Details(N-up)		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Combination		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Layout Order		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Border		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Combination Details(poster)		Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No
	Combination		Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No
	Overlap width line		Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No
	Combination(No Reduction)		No	No	No	No	No	No	No	Yes	Yes	Yes	No	No
	Rotate 180		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	180 Degree Rotation Setting...		No	No	No	No	No	No	No	No	No	No	No	No

		Skip Blank Pages		No	No	No	No	No	No	No	No	No	No	No
		Chapters		Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	No	No
		Print Position Settings		No	No	No	No	No	No	Yes	Yes	No	No	No
		Print Type		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Selection		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		1-Side/2-Side		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		booklet		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Binding Position		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Binding Margin		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Enable		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Front Side		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Back Side		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Image Shift		Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	No	No
		Enable		Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	No	No
		Front Side		Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	No	No
		Back Side		Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	No	No

Function				C650/C550/C451	C353/C253/C203	350/250/200	C652(DS)/C552(DS)/C452	C360/C280/C220	652/602/552/502	423/363/283/223	751/601(2.0.0.UPD_03)	751/601(1.0.2/3.UPD_03)	501/421/361	362/282/222	m68650
	Finish Tab														
	Staple			Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Center Staple and Fold			Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Punch			Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Fold			Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No
	Center Erase			No	Yes	No	No	No	No	No	No	No	No	No	No
	Output Order			No	No	No	No	No	No	No	Yes	Yes	No	No	No
	Output Tray			Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No

		Paper Arrangement	Yes	Yes	No	Yes	Yes	Yes	Yes	No	No	No	No	No
		Cover Mode Tab												
		Front Cover	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Back Cover	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Per Page Setting	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Transparency Interleave	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		PI Front Cover	Yes	No	No	Yes	No	Yes	No	Yes	Yes	No	No	No
		PI Back Cover	Yes	No	No	Yes	No	Yes	No	Yes	Yes	No	No	No
		Stamp/Composition Tab												
		Watermark	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Create Overlay File	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Print in Overlay	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Copy Protect	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	No	Yes	No	No
		Data/Time	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No
		Page Number	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No
		Header/Footer	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No
		Distribution Number Stamping	No	No	Yes	No	No	No	No	No	No	No	Yes	No

Function			C650/C550/C451	C353/C253/C203	350/250/200	C652(DS)/C552(DS)/C452	C360/C280/C220	652/602/552/502	423/363/283/223	751/601(2.0.0.UPD_03)	751/601(1.0.2/3.UPD_03)	501/421/361	362/282/222	mc8650
	Quality Tab													
		Select Color	Yes	Yes	No	Yes	Yes	Yes	Yes	No	No	No	No	No
		2 Color	Yes	Yes	No	Yes	Yes	No	No	No	No	No	No	No
		Print with Black	No	No	No	No	No	No	No	No	No	No	No	No
		Color Settings	Yes	Yes	No	Yes	Yes	Yes	Yes	No	No	No	No	No
		Auto Trapping	No	No	No	No	No	No	No	No	No	No	No	No
		Black Over Print	No	No	No	No	No	No	No	No	No	No	No	No

		Pattern	No	No	No	No	No	No	No	No	No	No	No
		Image Compression	No	No	No	No	No	No	No	No	No	No	No
		Glossy Mode	Yes	Yes	No	Yes	Yes	Yes	No	No	No	No	No
		Toner Save	No	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	No	No
		Edge Enhancement	No	Yes	No	Yes	Yes	Yes	Yes	No	No	No	No
		Font Setting	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes
		Smoothing	No	No	No	No	No	No	Yes	Yes	Yes	No	No
		Draft Print	No	No	No	No	No	No	Yes	Yes	Yes	No	No
	Other tab												
		Excel Job Control	No	No	No	No	No	No	No	No	No	No	No
		Remove White Background	No	No	No	No	No	No	No	No	No	No	No
		Thin Line Support	No	No	No	No	No	No	No	No	No	No	No
		Language Setting	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Function		C650/C550/C451	C353/C253/C203	350/250/200	C652(DS)/C552(DS)/C452	C360/C280/C220	652/602/552/502	423/363/283/223	751/601(2.0.0.UPD_03)	751/601(1.0.2/3.UPD_03)	501/421/361	362/282/222	mc8650
Device Property													
	Device Setting tab												
		Font Substituion Table	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Available PostScript Memory	No	No	No	No	No	No	No	No	No	No	No
		Output Protocol	No	No	No	No	No	No	No	No	No	No	No
		Send CTRL-D Before Each Job	No	No	No	No	No	No	No	No	No	No	No
		Send CTRL-D After Each Job	No	No	No	No	No	No	No	No	No	No	No
		Convert Gray Text to PostScript Gray	No	No	No	No	No	No	No	No	No	No	No
		Convert Gray Graphics to PostScript Gray	No	No	No	No	No	No	No	No	No	No	No
		Add Euro Currency Symbol to PostScript Fonts	No	No	No	No	No	No	No	No	No	No	No
		Job Timeout	No	No	No	No	No	No	No	No	No	No	No

		Wait Timeout	No	No	No	No	No	No	No	No	No	No	No	
		Minimum Font Size to Download as Outline	No	No	No	No	No	No	No	No	No	No	No	
		Maximum Font Size to Download as Bitmap	No	No	No	No	No	No	No	No	No	No	No	
		External Fonts	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
		Installable Options	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
		MoNochrome Only	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	Configure tab													
		Device Option	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
		Setting	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
		Paper Tray Information	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes
		Paper Tray Settings	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes
		Obtain Device Information	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
		Obtain Settings	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
		SNMP Settings	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Encrypt Passphrase	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No
	Software Tools	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
Function		C650/C550/C451	C353/C253/C203	350/250/200	C652(DS)/C552(DS)/C452	C360/C280/C220	652/602/552/502	423/363/283/223	751/601(2.0.0.UPD_03)	751/601(1.0.2/3.UPD_03)	501/421/361	362/282/222	mc8650	
Setting tab														
	EMF Spool	No	No	No	No	No	No	No	No	No	No	No	No	
	Display Constraint Message	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	Display paper set in Print Server Properties	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	Verify Authentication settings before printing	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	
	Popup Authentication Dialog when printing	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	
	Optimize CAD data Printing	No	No	No	No	No	No	No	No	No	No	No	No	
	Fix Secure Print	No	No	No	No	No	No	No	No	Yes	No	No	No	
	Enter ID/PWD to execute secure print	No	No	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	

		Save Custom Size	No	No	No	No	No	No	No	No	No	No	No	No
		Model Setting	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Printer

Function	C30P/C31P	mc4650	mc4695MF	C20	C20P	mc5550/mc5570	mc5650/mc5670	mc5450	C35P/mc4750	C35	C25	pp4650/pp5650	A4 common	42/36	42/36(EU/JP)	4700P/4000P/3300P	C3850/C3350	4750/4050	C3100P	C3110	4020/3320	25e	4750/4050	4402P/3602P	4422/3622	Baseline
	Document Property																									
	Advanced Tab																									
	Document Options	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	PostScript Options	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
	PostScript Output Option	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
	Send PostScript Error Handler	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
	Mirrored Output	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
	PostScript Pass through	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
	Print Optimizations	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Printer Features	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	BasicTab																									
	Original Orientation	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Original Size	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Output Size	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Zoom	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Paper Source	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Paper Type	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No

	Job Retention	No	No	No	No	No	No	No	No	yes	yes	yes	No	No	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	No
	Copies	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Collate	No	No	No	No	No	No	No	No	yes	yes	yes	No	No	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No
	Offset	No	No	No	No	No	No	No	No	No	No	No	No	No	yes	yes	No	yes	No	No	No	No	No	No	No	No	No	No
	Manually Print on 2nd Side	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	No	No	yes	yes	No	No	No	No	No	No	No
	Job Accounting Settings	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	yes	No	No	No	No	yes	No	No	yes	yes	No	No
	Authentication / Account Track	No	No	No	No	No	No	No	No	yes	yes	yes	No	No	yes	yes	No	yes	yes	yes	yes	No	No	yes	No	No	No	No

Function		C30P/C31P	mc4650	mc4695MF	C20	C20P	mc5550/mc5570	mc5650/mc5670	mc5450	C35P/mc4750	C35	C25	pp4650/pp5650	A4 common	42/36	42/36(EU/JP)	4700P/4000P/3300P	C3850/C3350	4750/4050	C3100P	C3110	4020/3320	25e	4750/4050	4402P/3602P	4422/3622	Baseline		
	Layout Tab																												
		N-up/Poster		yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	
		N-up/Poster Details(N-up)		yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	
		N-up	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	
		Order	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	
		Border	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	
		N-up/Poster Details(Poster)		yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	No
		Poster	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	No
		Poster Margin Line	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	No
		Rotate 180		yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	yes
		Skip Blank Pages		No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Print Type		yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes

		Selection	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
			1-Side/2-Side	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
			booklet	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	yes
		Booklet Details	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	yes
			Binding Direction	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	yes
		Border	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	yes
		Binding Position		yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No
		Binding Margin		yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	No
			Enable	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	No
			Front Side	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	No
			Back Side	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	No
		Image Shift		yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	No
			Enable	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	No
			Front Side	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	No
			Back Side	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	No

Function			C30P/C31P	mc4650	mc4695MF	C20	C20P	mc5550/mc5570	mc5650/mc5670	mc5450	C35P/mc4750	C35	C25	pp4650/pp5650	A4 common	42/36	42/36(EU/JP)	4700P/4000P/3300P	C3850/C3350	4750/4050	C3100P	C3110	4020/3320	25e	4750/4050	4402P/3602P	4422/3622	Baseline
	Finish Tab																											
	Staple		No	No	No	No	No	No	No	No	No	No	No	No	No	yes	yes	No	yes	yes	No	No	No	No	yes	No	No	No
	Center Staple and Fold		No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
	Punch		No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
	Fold		No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
	Center Erase		No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No

		Output Tray	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	yes	No	No	No	No
		Paper Arrangement	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
	Cover Page Tab																										
		Front Cover	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	No
		Back Cover	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	No
		Separator Page	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
	Watermark/Overlay Tab																										
		Watermark	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	No
		Create Overlay File	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	No
		Print in Overlay	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	No
	Quality Tab																										
		Select Color	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	yes
		Color Settings	No	No	No	No	No	No	No	yes	yes	yes	No	No	yes	yes	No	yes	yes	yes	yes	No	No	yes	No	No	No
		Auto Trapping	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Black Over Print	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Resolution	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Pattern	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Image Compression	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Color Separation	No	No	No	No	No	No	No	yes	yes	yes	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Glossy Mode	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	yes	No	No	No	No	No	No	No	No	No
		Toner Save	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No
		Edge Strength	No	No	No	No	No	No	No	yes	yes	yes	No	No	yes	yes	No	yes	yes	yes	yes	No	No	yes	No	No	No
		Font Setting	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes

Function		C30P/C31P	mc4650	mc4695MF	C20	C20P	mc5550/mc5570	mc5650/mc5670	mc5450	C35P/mc4750	C35	C25	pp4650/pp5650	A4 common	42/36	42/36(EU/JP)	4700P/4000P/3300P	C3850/C3350	4750/4050	C3100P	C3110	4020/3320	25e	4750/4050	4402P/3602P	4422/3622	Baseline	
	Other tab																											
	Excel Job Control	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	
	Remove White Background	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	
	Email Notification	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	No	No	No	No	No	No	No	No	No	No	
	Thin Line Support (Rect Out Mode)	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	
	Keep duplicate documents	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	yes	yes	No
	Language Setting	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
Device Property																												
	Device Setting tab																											
	Font Substituion Table	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Available PostScript Memory	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	
	Output Protocol	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	
	Send CTRL-D Before Each Job	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	
	Send CTRL-D After Each Job	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	
	Convert Gray Text to PostScript Gray	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	
	Convert Gray Graphics to PostScript Gray	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	
	Add Euro Currency Symbol to PostScript Fonts	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
	Job Timeout	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No

		Wait Timeout	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Minimum Font Size to Download as Outline	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Maximum Font Size to Download as Bitmap	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		External Fonts	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes

Function		C30P/C31P	mc4650	mc4695MF	C20	C20P	mc5550/mc5570	mc5650/mc5670	mc5450	C35P/mc4750	C35	C25	pp4650/pp5650	A4 common	42/36	42/36(EU/JP)	4700P/4000P/3300P	C3850/C3350	4750/4050	C3100P	C3110	4020/3320	25e	4750/4050	4402P/3602P	4422/3622	Baseline
	Configure tab																										
		Device Option	No	No	No	No	No	No	No	yes	yes	yes	No	No	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No
		Setting	No	No	No	No	No	No	No	yes	yes	yes	No	No	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No
		Paper Tray Information	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Paper Tray Settings	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
	Obtain Device Information		No	No	No	No	No	No	No	yes	yes	yes	No	No	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	No
	Obtain Settings		No	No	No	No	No	No	No	yes	yes	yes	No	No	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	No
		SNMP Settings	No	No	No	No	No	No	No	yes	yes	yes	No	No	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	No
	Encrypt Passphrase		No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
	Software Tools		yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	No	yes	yes	yes	yes
	Setting tab																										
	EMF Spool		No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
	Display Constraint Message		yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Display paper set in Print Server Properties		yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Verify Authentication		No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No

		settings before printing																										
		Popup Authentication Dialog when printing	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Enter ID/PWD to execute secure print	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Save Custom Size	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
		Model Setting	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes