






# Device Management Using ACS

## Technology Design Guide


April 2014





# Preface

---







Rule-based mapping of users to identity groups can be based on information available in an external directory

















Step 3: Click the **Directory Groups**





Step 8:

Step 3:

**Step 10:** In the text box for **Attribute Value**, enter **Network Admins**















Step 11: Select DenyAccess, and then click OK.

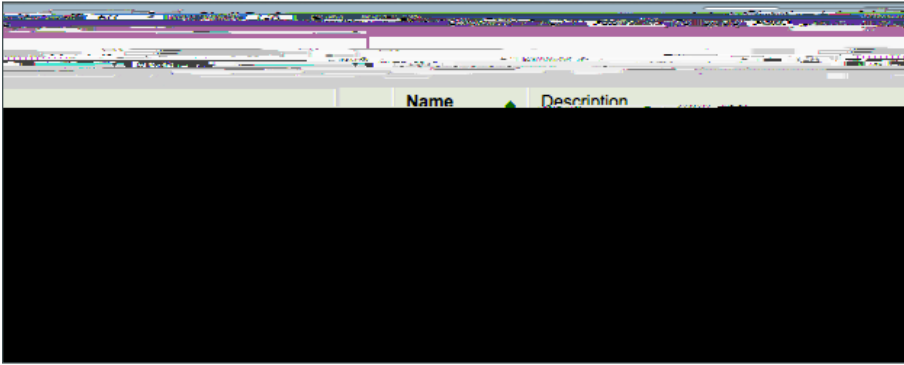

Step 12: Click OK again.

Step 13: Click Save Changes.

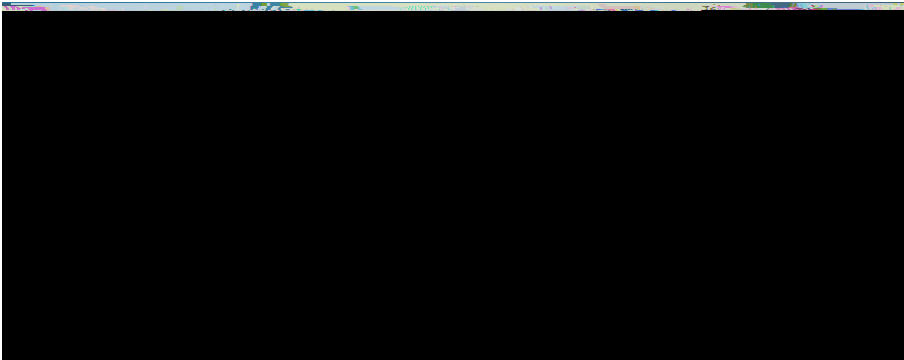








Step 4: Select NDG:Device Type.



Step 5: In the NDG:Device Type list, choose not In.

Step 6: To the right of the NDG:Device Type list, click **Select** **6GS1 e**





Please use the [feedback form](#) to send comments and suggestions about this guide.