


In many countries, any email with PII must be sent encrypted. If any unauthorized person baglreacdunancrypteademail

<sup>5</sup> Jose Pagliery, ["What We Know About the Bank Hacking Ring—And Who's Behind It,"](#) CNN Money, Feb. 16, 2015.; <sup>6</sup> Ibid.;

<sup>7</sup> Bryan Krebs, ["Email Attack on Vendor Set Up Breach at Target,"](#) KrebsOnSecurity blog, Feb. 12, 2014.; <sup>8</sup> John Fontana, ["Breach costs at \\$162 million, Target reports,"](#) ZDNet, Feb. 17, 2015.



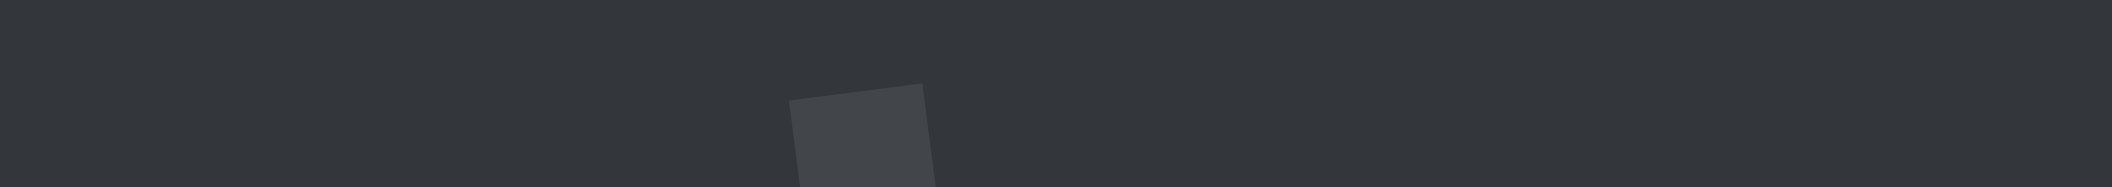

Cisco AMP uses a combination of file reputation, file sandboxing, and retrospective file analysis to identify and stop threats across the attack continuum. Features include the following:

- **File reputation** captures a fingerprint of each file as it traverses the Cisco email security gateway and sends it to the AMP cloud-based intelligence network for a reputation verdict. With these results, you can automatically block.



